

---

**Pacific Northwest  
National Laboratory**  
Operated by Battelle for the  
U.S. Department of Energy

# **Geologic Data Package for 2005 Integrated Disposal Facility Waste Performance Assessment**

S. P. Reidel

March 2004



Prepared for the U.S. Department of Energy  
under Contract DE-AC06-76RL01830

---

## DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor Battelle Memorial Institute, nor any of their employees, makes **any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights.** Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or Battelle Memorial Institute. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

PACIFIC NORTHWEST NATIONAL LABORATORY

*operated by*

BATTELLE

*for the*

UNITED STATES DEPARTMENT OF ENERGY

*under Contract DE-AC06-76RL01830*



This document was printed on recycled paper.

**Geologic Data Package for 2005  
Integrated Disposal Facility  
Performance Assessment**

S. P. Reidel

March 2004

Prepared for  
the U.S. Department of Energy  
under Contract DE-AC06-76RL01830

Pacific Northwest National Laboratory  
Richland, Washington 99352

## **Summary**

This data package is a compilation of existing geologic data from the Integrated Disposal Facility Site for use in the 2005 Performance Assessment. The data were compiled from both surface and subsurface geologic sources. The surface mapping has been published previously. The quality and uncertainty of the data are discussed.

# Contents

Summary .....	iii
1.0 Introduction.....	1.1
2.0 Source of Data.....	2.1
2.1 Surface Data .....	2.1
2.2 Borehole Sources.....	2.2
2.3 Methodology .....	2.5
3.0 Uncertainty in Data .....	3.1
3.1 Drilling Techniques.....	3.1
3.2 Borehole Location and Coverage .....	3.2
3.3 Sampling.....	3.2
3.4 Quality of Data .....	3.2
3.4.1 Drilling .....	3.3
3.4.2 Geologist's and Driller's Logs .....	3.3
3.4.3 Geophysical Logs.....	3.3
4.0 Geology.....	4.1
4.1 General Hanford Stratigraphy .....	4.1
4.1.1 200 East Area .....	4.2
4.2 Integrated Disposal Site Geology.....	4.4
4.2.1 Previous Studies .....	4.4
4.2.2 Site Stratigraphy .....	4.4
4.3 Mineralogy .....	4.21
4.3.1 Borehole 299-E17-21 .....	4.22

4.3.2	Borehole 299-E24-21 .....	4.26
5.0	Water Table and Aquifer Characterization .....	5.1
6.0	Seismic Data.....	6.1
7.0	References .....	7.1
	Appendix A – Slug Test Characterization Results.....	A.1
	Appendix B – Descriptions of Core Collected from Boreholes at the IDF Site .....	B.1

## Figures

1.1	Location Map of the Integrated Disposal Facility .....	1.1
2.1	Geologic and Geomorphic Map of the 200 East Area.....	2.1
4.1	Generalized stratigraphy of the Hanford Site and 200 East Area.....	4.1
4.2	Elevation of the Surface of the Columbia River Basalt Group Under the 200 East Area and the IDF Site.....	4.2
4.3	Location of Ground Water Monitoring Wells at the IDF Site and Efficiency of the Monitoring Network. ....	4.5
4.4	Integrated Disposal Site Stratigraphy .....	4.6
4.5	Fence Diagram of the IDF Site and Vicinity .....	4.10
4.6	Map Showing the Locations of Cross-Sections A - A', B - B', and C - C' .....	4.11
4.7	Cross-Section A – A' Across the IDF Site .....	4.12
4.8	Cross-Section B – B' Across the IDF Site.....	4.13
4.9	Cross-Section C – C' Across the IDF Site.....	4.14
4.10	A. Thickness of the Hanford Formation Under the IDF Site.....	4.17
4.11	Percentage of Sand and Gravel Present in the Upper Part of the Sand-Dominated Facies in Selected Boreholes Near the IDF Site .....	4.19
5.1	Water Table Map for the Hanford Site 200 East Area.....	5.1
6.1	Map Showing the Location of Earthquakes Detected Since 1969.....	6.1

## Tables

2.1	Borehole Information from the IDF Site and Adjacent Area.....	2.3
4.1	Stratigraphic Information from Boreholes in the Integrated Disposal Site .....	4.7
4.2	Thickness of Basal Gravel-Dominated Facies at the IDF Site.....	4.16
4.3	Thickness of Sand-Dominated Facies in IDF Boreholes .....	4.18
4.4	Elevation and Drilled Depths to Paleosols in IDF Boreholes.....	4.19
4.5	Description of Selected Core Sample from Borehole 299-E17-21 .....	4.22
4.6	Particle Size Distribution of Selected Sediment Samples from Borehole 299-E17-21 .....	4.23
4.7	Semiquantitative Estimates of Minerals Identified in Sand Fractions of Selected Sediment Samples from Borehole 299-E17-21 .....	4.23
4.8	Semiquantitative Estimates of Minerals Identified in Silt Fractions of Selected Sediment Samples from Borehole 299-E17-21 .....	4.24
4.9	Semiquantitative Estimates of Minerals Identified in Clay Fractions of Selected Sediment Samples from Borehole 299-E17-21 .....	4.24
4.10	Calculated Mineral Distribution on Whole Soil Basis (wt %) in Selected Sediment Samples from Borehole 299-E17-21 .....	4.25
4.11	Calculated Mineral Distribution in Selected Sediment Samples from Borehole 299-E17-21 .....	4.26
4.12	Samples Collected from Well 299-24-21 .....	4.27
4.13	Semi-quantitative XRD Results of Bulk Samples from Well 299-24-21 .....	4.27
4.14	Semi-Quantitative XRD Results of Clay Minerals Separated from the Samples Collected from 299-E24-21 .....	4.28

# 1.0 Introduction

The Office of River Protection at the Hanford Site is responsible for the safe underground storage of liquid waste from previous Hanford Site operations, the storage and disposal of immobilized tank waste, and closure of underground tanks. The current plan is to dispose of immobilized low-activity tank waste (ILAW) and other mixed waste in a new facility, the Integrated Disposal Facility (IDF), in the south-central part of 200-East Area (Figure 1.1) (Mann et al. 1997).

This report is a compilation of the existing geologic data package for the Integrated Disposal Site. This data package is being assembled for the 2005 IDF Performance Assessment (PA).

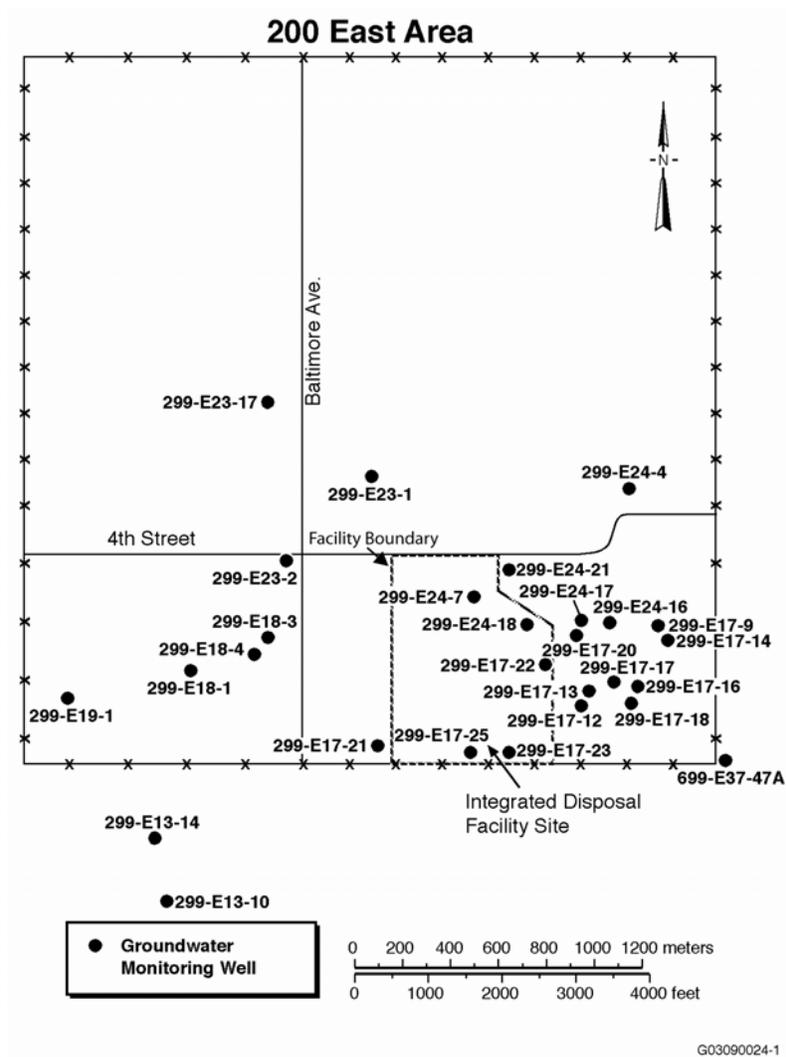


Figure 1.1. Location Map of the Integrated Disposal Facility

## 2.0 Source of Data

Data used in this compilation were obtained from surface geologic studies and from borehole data.

### 2.1 Surface Data

The surface geology and geomorphology of the Hanford Site has been mapped and published by Reidel and Fecht (1994a, 1994b). These studies (Figure 2.1) have shown that the geomorphology of the

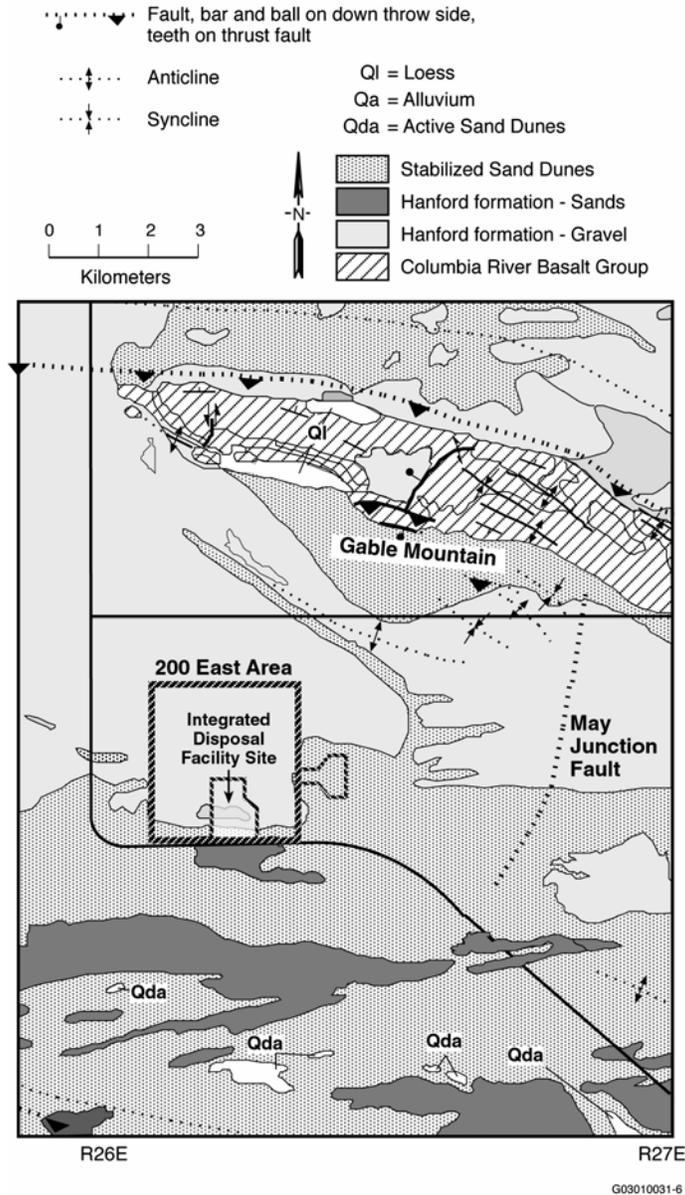


Figure 2.1. Geologic and Geomorphic Map of the 200 East Area

200 Areas is a flood bar (the 200 Areas plateau) that formed as sediments were deposited by the Missoula floods during the Pleistocene Epoch. A topographic low area immediately east of the 200 East Area is an erosional channel cut by the Missoula floodwaters that moved south through Gable Gap.

The principal geologic units exposed at the surface are fluvial and eolian sands (Reidel and Fecht 1994a, 1994b). The fluvial sands were deposited by the Missoula floods and have since been reworked by westerly winds to form a thin veneer of eolian deposits. The eolian deposits have been stabilized by vegetation in some areas but active sand dunes are present to the south.

## 2.2 Borehole Sources

Borehole data consisting of drilling logs, archived samples and geophysical logs are the principal data sets used to interpret the subsurface at the IDF. In addition, numerous reports describing the geology of the area and vicinity are available and are a valuable source of information (e.g., Tallman et al. 1979; DOE 1988; Connelly et al. 1992; Williams et al. 2000). During the course of this study, archived natural gamma geophysical logs from boreholes at the site and surrounding area were located and the logs were incorporated into the interpretations. These older geophysical logs included some from surrounding waste disposal sites obtained prior to discharge of effluent and provide an additional source of information for stratigraphic correlations.

Table 2.1 summarizes pertinent information about the wells and boreholes used in this report. The north-south and east-west coordinates listed in Table 2.1 were obtained from the well completion report for each borehole or, if no well completion report was available, from the well database maintained by Pacific Northwest National Laboratory (PNNL). For data obtained from the database, the most recent survey was used.

Elevation information listed in Table 2.1 was obtained from well completion reports, engineering surveys, as-built diagrams if available, from Chamness and Merz (1993), or from a well database maintained by Pacific Northwest National Laboratory. Because the boreholes are from so many vintages and because several different surveys have been used at the Hanford Site over the years, no attempt was made to assure consistency in the elevation survey data. However, differences among surveys are generally small (<3 feet; 1 m) with respect to other uncertainties associated with the data (see discussion on uncertainties). Except for water levels in areas with a relatively flat water table, the uncertainties will not affect significantly the geologic information presented in this database. The well completion dates for the boreholes, the total depths, and the types of boreholes were obtained from well completion reports, as-built diagrams, and Chamness and Merz (1993).

Particle size distribution and calcium carbonate content information are available for some boreholes from the ROCSAN database and studies on the IDF well samples. The ROCSAN database is a database of particle size distribution data that was maintained by Rockwell Hanford Operations and Westinghouse Hanford Company. The database is no longer maintained but is on file at Pacific Northwest National Laboratory and available through the *Virtual Library* maintained by the integrating contractor. Table 2.1 indicates the drilling and sampling method used for each borehole. ROCSAN data was only considered for intervals in boreholes sampled by drive barrel because hard tool drilling pulverizes the sediments so that results are not representative of actual particle size distribution. The drilling method was obtained

**Table 2.1. Borehole Information from the IDF Site and Adjacent Area**

Borehole	Completion Date	Lambert Coordinates NS/EW (m)	Hanford Coordinates NS/EW (ft)	Quality	Purpose	Casing Elevation(ft)	Ground Elevation (ft)	Total Depth (ft)	Type of Log	Drilling Method	Sieve	CaCO3	Moisture	Gross Gamma-Ray Log	Neutron Log	Drill Cuttings
E13-10	1984	134249.07/ 573190.57	35348/-54798	Good	GW	733	NA	346	Geologist	Cable tool	N	N	N	N	N	N
E17-12	1986	135118.36/ 574902.94	38200/-49180	Good	GW	719	NA	340	Geologist	Cable tool	N	N	N	N	N	N
E17-13	1986	135164.69/ 574902.94	38352/-49039	Good	GW	719	NA	337	Geologist	Cable tool	N	N	N	N	N	N
E17-17	1988	135201.57/ 575044.06	38473/-48717	Good	GW	720	717	331	Geologist	Cable tool	N	N	N	Y	N	N
E17-18	1988	135115.31/ 575109.99	38190/- 48500.7	Good	GW	721	718	332	Geologist	Cable tool	N	N	N	Y	N	N
E17-20	1988	135407.71/ 574936.49	39149.3/- 49069.9	Good	GW	719	717	324	Geologist	Cable tool	N	N	N	Y	N	N
E17-21	1998	134894.21/ 574107.02	NA	Good	GW/V/C	737	735	480	Geologist	Becker	Y	Y	Y	Y SG	Y	Y Core
E17-22 C3826	2002	574841.067/ 135195.921	NA	Excellent	GW/V/C	737.01	723.7	363	Geologist	Becker	Y	Y	Y	Y SG	N	Y Core
E17-23 C3827	2002	574694.485/ 134842.766	NA	Excellent	GW/V/C	223.843	734.4	372	Geologist	Becker	Y	Y	Y	Y SG	N	Y Core
E17-25 C3926	2002	574515.171/ 134845.913	NA	Excellent	GW/C	225.791	738.3	382.5	Geologist	Becker	N	N	N	Y SG	N	Y
E18-1	1988	135197.30/ 573294.20	38459/-54458	Good	GW	720	716	332	Geologist	Cable tool	Y	Y	N	Y	N	N
E18-3	1988	135274.42/ 573426.85	38712/- 54022.8	Good	GW	722	718	330	Geologist	Cable tool	Y	Y	N	Y	N	N
E18-4	1988	135755.82/ 573426.48	38651/-54024	Good	GW	722	718	330	Geologist	Cable tool	Y	Y	N	Y	N	N
E19-1	1957	135083.31/ 572817.19	38085/-56023	Poor	GW	736	NA	370	Driller's log	Cable tool	N	N	N	Y	N	N
E23-1	1956	136011.73/ 574043.40	41131/-52000	Fair	C	710	NA	348	Driller's log	Cable tool	Y	Y	N	Y	N	Y
E23-2	1961	135667.00/ 573738.60	40000/-53000	Fair	GW	721	NA	456	Driller's log	Cable tool	N	N	Y	N	N	N
E24-4	1956	136027.24/ 575115.44	41181.9- 48482.8	Fair	GW	697	NA	330	Driller's log	Cable tool	N	N	Y	N	N	N

**Table 2.1. (contd.)**

Borehole	Completion Date	Lambert Coordinates NS/EW (m)	Hanford Coordinates NS/EW (ft)	Quality	Purpose	Casing Elevation(ft)	Ground Elevation (ft)	Total Depth (ft)	Type of Log	Drilling Method	Sieve	CaCO3	Moisture	Gross Gamma-Ray Log	Neutron Log	Drill Cuttings
E24-7	1956	135554.38/ 574405.20	39630.5/- 50813	Poor	GW	716	NA	450	Driller's log	Cable tool	Y	Y	N	N	N	Y
E24-16	1988	135456.54/ 575016.14	39309.5/- 48808.6	Good	GW	718	715	329	Geologist	Cable tool	N	N	N	Y	N	N
E24-17	1988	135456.32/ 574936.34	39308.8/- 49070.4	Good	GW	719	716	329	Geologist	Cable Tool	N	N	N	Y	N	N
E24-18	1988	135463.0/ 574645.59	39330.7/- 50024.3	Good	GW	719	716	330	Geologist	Cable tool	N	N	N	Y	N	N
E24-21 C3177	2001	574635.761/ 135698.200	NA	Excellent	GW, C	218.643	217,749	335	Geologist	Becker	Y	Y	Y	Y SG	N	Y Core
E37-47A	1996	134893.26/ 575556.97	37430.58/ 47044.23	Good	GW	717	715	525	Geologist	Air Rotary	Y	Y	Y	Y SG	Y	Y
C3828	2002	574518.125/ 134845.545	NA	Excellent	C	NA	224.801	383	Geologist	Becker	Y	Y	Y	N	N	Y Core

C = Characterization  
 GW = Groundwater  
 NA = not available  
 N = No  
 SG = Spectral Gamma-Ray  
 V = Vadose  
 Y = Yes

from geologists logs, well construction reports, and as-built diagrams for most boreholes. Appropriate particle size distribution data from ROCSAN was used as supplemental textural information but because of the varying quality of the data, it is not included in this report. Khaleel (data package in prep 2003) reports particle size data from the disposal site and should be referred to for the best compilation of data.

Calcium carbonate and moisture contents are available for some boreholes. Available data are in the borehole packages on file at Pacific Northwest National Laboratory and reports on IDF samples. The data were obtained from discrete samples collected by the borehole geologist during drilling. The moisture data were used to supplement the geologists log and the gross gamma-ray log in determining lithologic variations. For obvious reasons, moisture data is only valuable for samples collected above the water table. Khaleel (2003) reports moisture data from the disposal sites and should be referred to for the best compilation of data from these sites.

Gross gamma-ray logs, spectral gamma-ray logs, and neutron moisture logs exist for many of the boreholes used for this database. Only logs obtained during drilling were used to supplement the geologists log because most of the geophysical logs obtained subsequent to borehole completion reflect the borehole construction materials more than they do the geologic materials. Available logs listed in Tables 2.1 and 2.2 are on file at Pacific Northwest National Laboratory. The newer RCRA (spectral gamma-ray) well logs are available electronically through the USDOE Grand Junction Office.

Finally, drill cuttings (e.g., chip samples) are available from most of the boreholes used for this database. The same precautions pertaining to the ROCSAN data pertain to the physical samples. That is, drill cuttings obtained from hard tool drilling methods will yield an unrepresentative particle size distribution; lithologies however, remain unchanged. All available physical samples are on file in the Hanford Geotechnical Sample Library under custody of Pacific Northwest National Laboratory.

## **2.3 Methodology**

The process of building the database followed a series of steps that were designed to insure the data were used properly. First, the main stratigraphic units and contacts were identified in boreholes with geologists logs and geophysical data. Gross gamma-ray logs were examined with respect to the geologists logs for geophysical signatures of the stratigraphy. For many boreholes, chip samples (e.g., drill cuttings) from the Hanford Geotechnical Sample Library were examined to confirm stratigraphic units and lateral changes in the percentage of silt, sand and gravel. Next, boreholes with driller's logs and gross gamma-ray logs were examined and compared to nearby wells and boreholes.

## 3.0 Uncertainty in Data

The principal source of uncertainty for the lateral continuity of the layers and thickness of the beds is borehole data. Surface mapping is well controlled at Hanford and has been done by geologists with extensive mapping experience at Hanford and in the Columbia Basin. The quality of borehole data is related to the drilling technique, the logging of the borehole, and the sample collection. Subtle differences between some stratigraphic units such as silty sandy layers of the Hanford formation and units of the underlying Ringold Formation (e.g., upper Ringold and intercalated silty units) make identification of the contact difficult. The quality of the driller's/geologist's log, and archived samples and use of geophysical logs become crucial to reducing this type of uncertainty.

In addition to the uncertainty in borehole data, there is uncertainty in the geometric shape of the sediment body. Because of the nature of the cataclysmic flooding that produced the Hanford formation, very few analogs are available for comparison to the Hanford Site. Borrow pits in the Pasco Basin and excavations at Hanford provide a glimpse into the geometric shape of a sediment body but often the nature of the sediment body must be interpreted from boreholes.

### 3.1 Drilling Techniques

Most boreholes near the proposed Integrated Disposal Site have been drilled using cable tool techniques and, less often, air rotary techniques. Five new IDF boreholes, 299-E17-21, 299-E24-21, 299-E17-22, 299-E17-23, and 299-E17-25, however, were drilled using the Becker-Hammer technique that allowed high quality core samples to be recovered. The principal source of uncertainty here is in the depth and thickness of the sedimentary beds due to straightness of the boreholes, which have not been surveyed for straightness. However, this is deemed to be minor because most boreholes have shown to have minor deviations when the groundwater pumps and risers were installed.

Cable tool drilling has been the standard technique from earliest drilling at Hanford because drilling can be done without adding water. Drilling advances by use of drive barrel or hard tool and driven temporary casing. However, drillers routinely added water when using hard tool. The technique generally provides acceptable sample control and has proven successful. More recently, in uncontaminated areas, air rotary has been the preferred technique. There are several disadvantages to the cable tool drilling:

- Samples can be difficult to retain in the drive barrel, especially samples from very dry zones.
- Gravels are not easily retrieved because they are not easily retained in the drive barrel;
- Cemented units or large gravels must be drilled with a "hard tool" which breaks up the sample and alters the grain size distribution of samples.

The disadvantages to air rotary drilling are:

- Samples can be difficult to retrieve. The quantity of sample is often related to the air pressure used.

- Low pressures of the air line can result in excessive grinding of particles by bits and thus, the sample may not be representative of the sediment body.

Most boreholes prior to the 1980s were drilled without a well-site geologist present to log the samples. Thus, the only records of early drilling are driller's logs that vary in the quality of the sample description. Driller's logs are extremely inconsistent because the driller's attention is focused on operating the rig and not on describing the samples. The quality of the geologist's logs also varies from borehole to borehole. For example, a geologist new to the site will recognize the major sediment changes in drill cuttings but may not recognize the subtler changes that also represent changes in stratigraphy.

Many boreholes at Hanford were completed without the benefit of being geophysically logged. Geophysical logging can be an important tool for determining the depth of lithologic changes. Geophysical logs show subtle lithology differences stemming from differing amounts of natural gamma-ray emitters (most commonly  $^{40}\text{K}$ ). Gamma-ray logs typically are proportional to clay and silt abundance and can provide information on changes in grain size. When geophysical logs are used along with the well-site geologist's logs and archived samples, the uncertainty in the depth of lithologic changes is reduced.

### **3.2 Borehole Location and Coverage**

Borehole coverage is usually dictated by factors other than addressing a geologic problem. Therefore the coverage of boreholes is generally inadequate to address many geologic problems. For the Integrated Disposal Site borehole coverage is good because of characterization studies for the Performance Assessment and the installation of groundwater wells.

### **3.3 Sampling**

Sample retrieval is often difficult and sample quantities are limited. Vadose zone drilling is difficult for sample recovery because the samples are typically dry and are not easily retained in the drive barrel. As indicated above, the grain size of the sample can also be affected by the drilling technique such as in "hard tool" drilling which generates an increase in the fine-grained portion of the sediment samples.

In order to perform certain tests, samples from several depths often must be composited. Also, certain tests performed on samples in the past may also have destroyed the integrity of the sample. In the past particle size testing resulted in loss of fines when the samples were returned to the Hanford Geotechnical Sample Library.

### **3.4 Quality of Data**

From the considerations discussed above, the quality of data available for the Hanford Site and the disposal site is variable. This section discusses how the uncertainty of the data was factored into the geologic models for the sites.

### **3.4.1 Drilling**

Except for IDF Project boreholes, most boreholes were drilled using typically the cable tool and air rotary method. The Becker Hammer technique used on boreholes 299-E17-21, E17-22, E17-23, E17-25, and E24-21 provided typically undisturbed core samples. Table 2.1 provides a listing of the drilling techniques and information relevant to drilling and sampling activities for boreholes used in this report. The cable tool and air rotary techniques provided cuttings that can be logged. Both methods provide samples and if the drilling technique was recorded, then sample quality can be easily factored in to the geologic interpretations (e.g., cable tool uses a hard tool which breaks up gravel thus particle size distributions in gravels are in error and severely limits the use for geologic interpretations).

### **3.4.2 Geologist's and Driller's Logs**

By far the main factor effecting quality of the data is the drilling log. Generally, prior to the late 1970s, geologists were not present during drilling. Thus, the logs available for this time period are poor to fair. It is apparent that some drillers were very good at describing the sediments so that the quality of driller's log is variable but even then only the major stratigraphic changes or properties are recorded. By far the best quality well logs are those prepared by experienced geologists. Most wells drilled after the late 1970s were logged by geologists. Table 2.1 provides a listing of which wells were logged by geologists.

### **3.4.3 Geophysical Logs**

Geophysical logging techniques have improved over the years but even an older gross gamma-ray log from a borehole is an invaluable piece of information. Probably the poorest quality interpretation is from a borehole for which only a driller's log exists. A borehole with core, a geologist's log and a gross gamma-ray log offers the highest quality information for interpretation.

The older natural gamma-ray logs used in this study allowed older wells, for which only driller's logs were previously available, to be reinterpreted and correlated with newer wells for which geologist's logs and geophysical logs are available. This greatly increased the confidence in placing stratigraphic contacts. In addition, the signature of the geophysical response from the formations can provide an additional tool for correlating stratigraphy between boreholes.

## 4.0 Geology

### 4.1 General Hanford Stratigraphy

The site for the Integrated Disposal Facility (IDF) is in a sequence of sediments (Figure 2.1) that overlie the Columbia River Basalt Group on the north limb of the Cold Creek syncline. These sediments include the upper Miocene to Pliocene Ringold Formation, Pleistocene cataclysmic flood gravels, sands and silt of the Hanford formation, and Holocene eolian deposits (Figure 4.1).

The main nomenclature employed in this report is consistent with the standardized use for the Hanford Site (i.e., Delaney et al. 1991; Reidel et al. 1992; Lindsey et al. 1994; Lindsey 1996; DOE 2002) and IDF (Reidel and Horton, 1999). Subdivision of the main units is inconsistent across the Hanford Site because of the difficulty in correlating beds over great distances. Following geologic convention, the

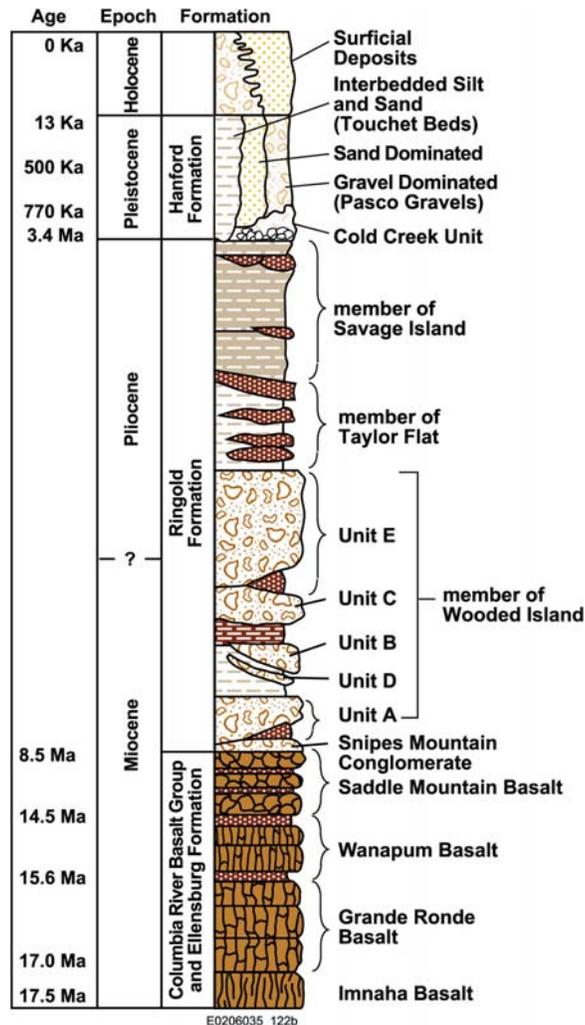


Figure 4.1. Generalized Stratigraphy of the Hanford Site and 200 East Area

discussion in this report proceeds from oldest to youngest units. In addition, this report will use feet rather than meters following the convention used in borehole data.

#### 4.1.1 200 East Area

The geology of the 200 East Area consists of the Elephant Mountain Member of the Saddle Mountains Basalt, Columbia River Basalt Group overlain by the Ringold Formation and the Hanford formation. The Elephant Mountain Member is the uppermost unit of the Columbia River Basalt Group in this portion of the Hanford Site and forms the top of basalt throughout the area (Figure 4.2).

The Ringold Formation consists of fluvial and lacustrine sediments deposited by the ancestral Columbia and Clearwater-Salmon river systems between about 3.4 and 8.5 Ma (Fecht et al. 1987).

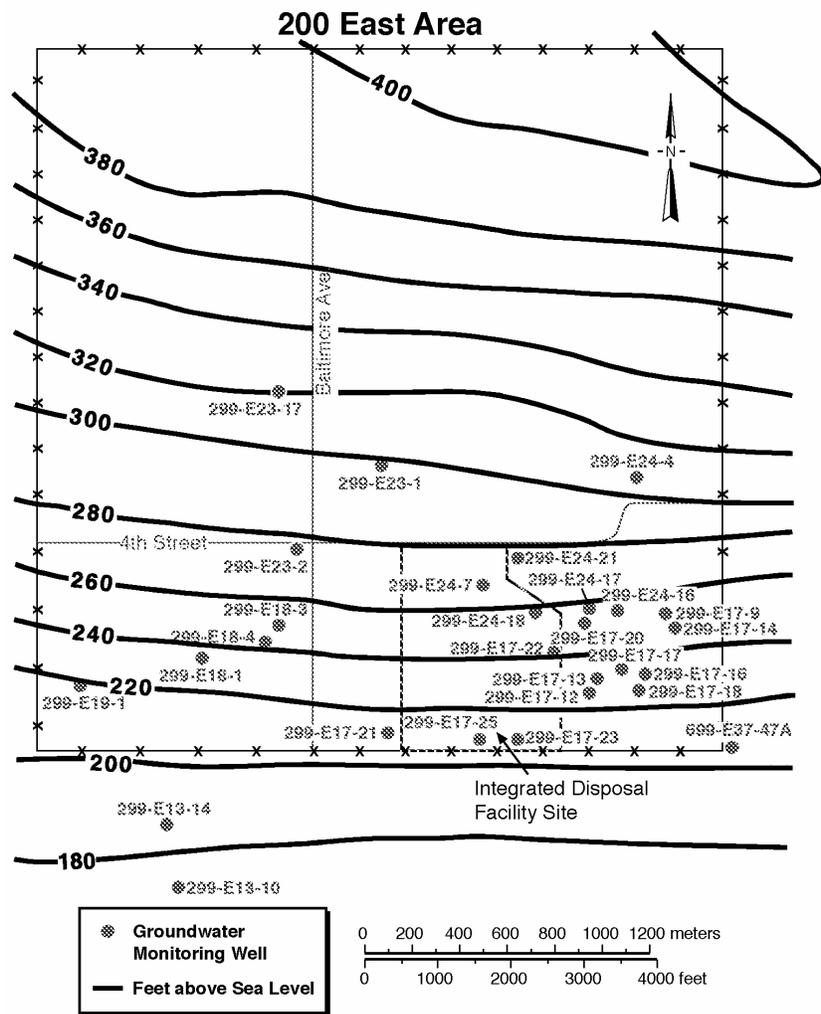


Figure 4.2. Elevation of the Surface of the Columbia River Basalt Group Under the 200 East Area and the IDF Site (from Williams et al., 2000).

Lindsey (1996) described the Ringold Formation in terms of three informal members: 1) the member of Wooded Island, 2) the member of Taylor Flat, and 3) the member of Savage Island. Of these, only the member of Wooded Island is present beneath the 200 East Area.

The member of Wooded Island consists of five separate units dominated by fluvial gravels. The gravels are designated (from bottom to top) as units A, D, B, C, and E. The gravel units are separated by fine-grained deposits typical of overbank and lacustrine environments. The lowermost of the fine-grained sequences is designated the lower mud unit. Only gravel units A and E are present beneath the 200 East Area and the Ringold Formation is entirely absent beneath the north and northeast parts of the 200 East Area (Williams, et al. 2000) due to erosion.

The Ringold Formation gravels are clast- and matrix-supported, pebble to cobble gravels with a fine to coarse sand matrix (Fecht et al., 1987; Lindsey 1996). The most common lithologies are basalt, quartzite, and intermediate to felsic volcanics. Interbedded lenses of silt and sand are common. Cemented zones within the gravels are discontinuous and of variable thickness. In outcrop, the gravels are massive, planer bedded, or cross-bedded. Lying above the Ringold gravels are silts and sands of the member of Taylor Flat.

The Hanford formation overlies the Ringold Formation. The Hanford formation consists of glaciofluvial sediments deposited by cataclysmic floods from Glacial Lake Missoula, Glacial Lake Columbia, Pluvial Lake Bonneville, and ice-margin lakes. The Hanford formation sediments resulted from at least four major glacial events and were deposited between about 2 Ma and 13 Ka. The Hanford formation consists of pebble- to boulder-gravel, fine- to coarse-grained sand, and silt- to clayey-silt. These deposits are divided into three facies: 1) gravel-dominated facies, 2) sand-dominated facies, and 3) interbedded sand- and silt-dominated facies (DOE 2002). The Hanford formation is present throughout the Hanford Site and is up to 65 m thick (Delaney et al. 1991).

- Gravel-dominated facies - This facies generally consists of coarse-grained basaltic sand and granule to boulder gravel (DOE 2002). Many exposures on the Hanford Site (e.g., various burrow pits) show that these deposits typically have an open framework texture, massive bedding, plane to low-angle bedding, and large-scale planar cross bedding in outcrop. The gravel-dominated facies was deposited by high-energy floodwaters in or immediately adjacent to the main cataclysmic flood channelways.
- Sand-dominated facies - This facies consists of fine- to coarse-grained sand and granule gravel with sparse layers of Cascade ash deposits. The sands typically have high basalt content and are commonly referred to as black, gray, or salt-and-pepper sands (DOE 2002). They may contain small pebbles and rip-up clasts, pebble-gravel interbeds, and silty interbeds less than 3 ft (1 m) thick. The silt content of the sands is variable, but where the silt is low a well-sorted texture is common. The sand facies was deposited adjacent to main flood channel ways during the waning stages of flooding. The facies is transitional between the gravel-dominated facies and the interbedded sand- and silt-dominated facies. Field studies have shown two subfacies. One is quartzofeldspathic sand with mainly plane-laminated or upward grading bedding with local cross bedding. The second subfacies is a highly basaltic sand to salt and pepper sand mostly related to scabland channel deposits and the lowermost glaciofluvial channel ways. Cross bedding and plane bedding is common.

- Interbedded Sand- and Silt-dominated facies - This facies consists of thin bedded, plane-laminated and ripple cross-laminated silt and fine- to coarse-grained sand (DOE 2002). Beds are typically a few centimeters to several tens of centimeters thick and commonly display normally graded-bedding (Myers et al. 1979; Bjornstad et al. 1987; DOE 1988; DOE 2002). Local clay-rich beds occur in the silt-dominated facies. Sediments of this facies were deposited under slack water conditions and in back flooded areas (DOE 1988).

Clastic dikes and pattern ground are a common features in the Hanford formation throughout the southern part of 200 West Area, the U.S. Ecology Site and the Grout Vault Area (now the Waste treatment Plant) where the Hanford formation is not covered by younger sediments. Where covered by younger sediments, evidence for clastic dikes is not readily apparent but, never the less, clastic dikes are thought to be equally abundant as south of 200 West Area.

Holocene sediments at Hanford typically consist of active and stabilized sand dunes as well as localized alluvial fans and stream deposits. In the 200 East Area the dunes typically are parabolic. Mazama ash (6,000 years before present) is found in the dune deposits. The dunes have massive cross bedding indicating eastward transport. Active blowouts can occur in the dune fields. Regolith stabilized by vegetation is associated with shrub-steppe plant communities.

## **4.2 Integrated Disposal Site Geology**

### **4.2.1 Previous Studies**

The Integrated Disposal Facility (IDF) is an area where no previous construction has been done so no major geologic studies have been carried out on the site. Studies relevant to the site are summarized in Reidel and Horton (1999). The first major activity was the drilling of borehole 299-E17-21 at the south-west end of the site and obtaining the first high-quality data from the area. This was followed by drilling of 299-E24-21 at the northwest corner of the site and then 299-E17-22, 299-E17-23, and 299-E17-25 (Figure 4.3).


### **4.2.2 Site Stratigraphy**

The stratigraphy at the new IDF site consists of the Hanford formation and Ringold Formation overlying the Columbia River Basalt Group. Surficial sediments are mainly eolian deposits consisting of reworked Hanford sands and silts.


The stratigraphy and the stratigraphic model developed for this study is summarized in Figure 4.4 and Table 4.1. This diagram is based upon more detailed cross-sections (Figures 4.5, 4.6, 4.7, 4.8, and 4.9).

The stratigraphy of the new IDF site is divided from youngest to oldest into the following units:

- Eolian Deposits

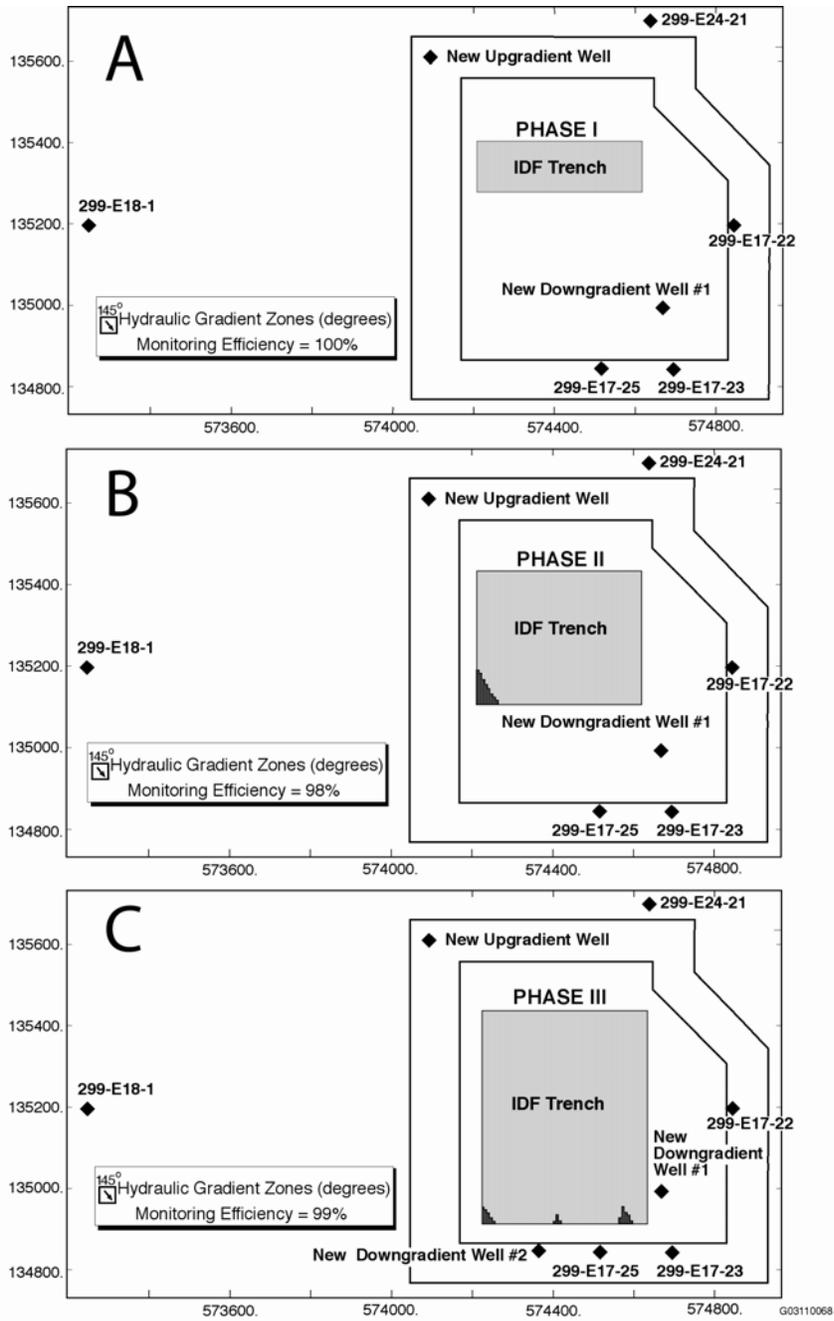

**Figure 4.3. Location of Ground Water Monitoring Wells at the IDF Site and Efficiency of the Monitoring Network.**

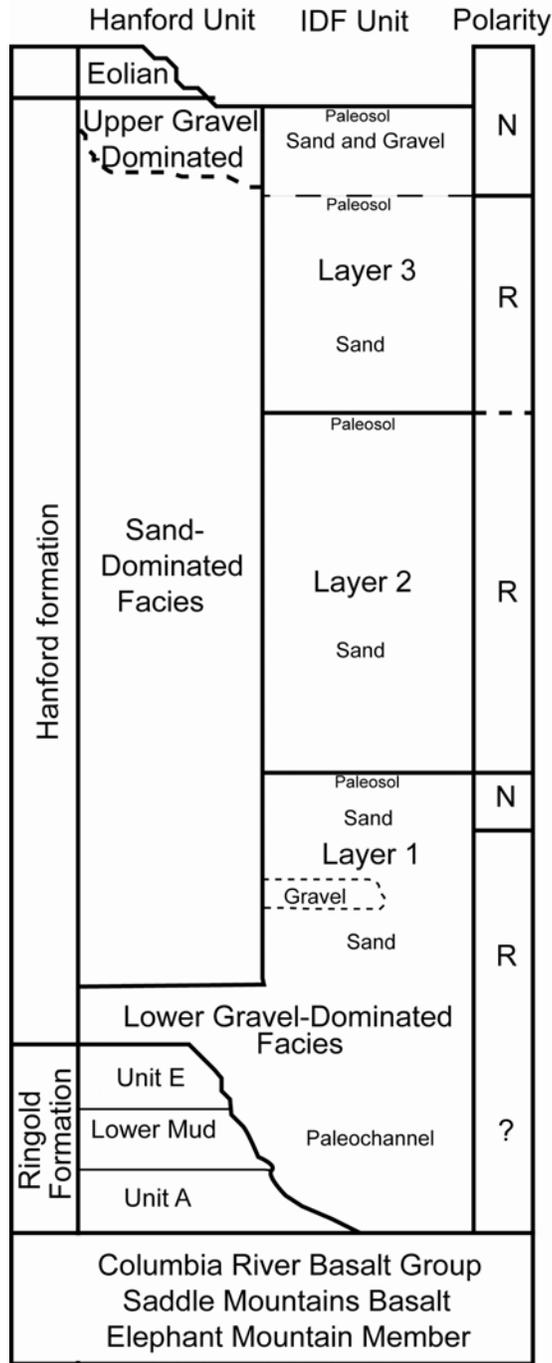

**Figure 4.4. Integrated Disposal Site Stratigraphy**

**Table 4.1. Stratigraphic Information from Boreholes in the Integrated Disposal Site (ft [m])**

Borehole	Surface Elevation [brass cap or casing (C)]	Back-fill	Surface Sand (S)	Top of Layer 3 (L3)	Top of Layer 2 (L2)	Top of Layer 1 (L1)	Top of Sandy Gravel 1 (G1)	Top of Sand 1 (S1)	Top of Sandy Gravel 2 (G2)	Top of Sand to Silty Gravelly Sand 2 (S2)	Top of Gravel 3 (G3)	Top of Sand to Silty Sand 3 (S3)	Top of Gravel 4 (G4)	Thickness of Hanford Formation	Top of Ringold	Top of Unit E	Silt	Top of Lower Mud	Top of Unit A	Thickness of Ringold	Basalt	Water Table Elevation	Date of Water Level Measurement
E13-10	733(C) [223]	n	733 [223]	nd	nd	nd	np	733 [223]	713 [217]	705 [215]	537 [164]	514 [157]	494 [151]	239 [73]	449 [137]	494 [151]	np	np	np	nd	np	399.74 [121.8]	Mar-99
E17-12	719 (C) [219]	n	719 [219]	669 [204]	647 [197]	564 [172]	704 [215]	694 [212]	np	694 [212]	497 [151]	479 [146]	429 [131]	nd	np	np	np	np	np	nd	np	399.17 [121.7]	Mar-99
E17-13	719 (C) [219]	31	np	nd	647 [197]	nd	nd	689 [210]	np	689 [210]	494 [150]	469 [143]	424 [129]	nd	np	np	np	np	np	nd	np	399.56 [121.8]	Mar-98
E17-17	717 [219]	n	716 [219]	nd	651 [198]	nd	716 [218]	702 [214]	np	702 [214]	492 [150]	442 [135]	417 [127]	299 [91]	417 [127]	492 [150]	442 [135]	np	np	nd	np	399.8 [103.6]	Oct-98
E17-18	718 [219]	n	717 [219]	nd	648 [198]	nd	713 [217]	693 [211]	626 [191]	616 [188]	483 [147]	458 [140]	426 [130]	291 [89]	426 [130]	483 [147]	434 [132]	np	np	nd	np	399.27 [121.7]	Mar-99
E17-20	717 [219]	n	716 [219]	nd	646 [197]	nd	706 [215]	696 [[212]	676 [206]	671 [205]	497 [151]	436 [133]	416 [127]	nd	np	491 [150]	436 [132]	np	np	nd	np	400.55 [122.1]	Apr-97
E17-21	735 [224]	n	735 [224]	730 [223]	677 [206]	572 [174]	730 [223]	720 [219]	715 [218]	705 [215]	523 [159]	505 [154]	447 [136]	238 [73]	497 [151]	400 [122]	np	357 [109]	296	nd	np	403 [122.8]	Apr-98
E17-22	723.7 [221]	n	723.7 [221]	722 [220]	650 [198]	nd	np	722 [220]	np	717.7 [219]	507 [155]	485.7 [148]	449 [137]	nd	np	np	np	np	np	nd	np	401.88 [122.5]	Apr.-02
E17-23	734.4 [224]	n	734.4 [224]	733 [223]	672 [205]	576 [176]	np	733 [223]	711 [217]	705.4 [215]	501 [153]	498.4 [152]	453 [138]	nd	np	np	np	np	np	nd	np	401.89 [122.5]	Apr.-02
E17-25	738.3 [225]	n	738.3 [225]	np	np	np	np	737 [225]	729 [222]	727.3 [222]	504 [154]	479 [146]	445 [136]	nd	np	np	np	np	np	nd	np	400.68 [122.1]	Apr.-02
E18-1	716 [218]	n	nd	nd	nd	nd	720 [219]	700 [213]	675 [206]	660 [201]	545 [166]	535 [163]	np	215 [66]	505 [154]	505 [154]	np	np	np	nd	np	399.44 [121.8]	Mar-99


Table 4.1. (contd.)

Borehole	Surface Elevation [brass cap or casing (C)]	Back-fill	Surface Sand (S)	Top of Layer 3 (L3)	Top of Layer 2 (L2)	Top of Layer 1 (L1)	Top of Sandy Gravel 1 (G1)	Top of Sand 1 (S1)	Top of Sandy Gravel 2 (G2)	Top of Sand to Silty Gravelly Sand 2 (S2)	Top of Gravel 3 (G3)	Top of Sand to Silty Sand 3 (S3)	Top of Gravel 4 (G4)	Thickness of Hanford Formation	Top of Ringold	Top of Unit E	Silt	Top of Lower Mud	Top of Unit A	Thickness of Ringold	Basalt	Water Table Elevation	Date of Water Level Measurement
E18-3	718 [219]	n	718 [219]	nd	656 [200]	nd	715 [218]	703 [214]	nd	656 [200]	546 [166]	542 [165]	np	235 [72]	483 [147]	483 [147]	np	np	np	nd	np	401.1 [122.3]	Jun-96
E18-4	718 [219]	n	718 [219]	nd	nd	nd	715 [218]	699 [213]	668 [204]	658 [201]	nd	568 [179]	np	232 [71]	486 [148]	486 [148]	np	np	np	nd	np	401.17 [122.3]	Jun-96
E19-1	736 (C) [224]	n	736 [224]	nd	nd	nd	735 [224]	716 [218]	686 [209]	672 [205]	520 [159]	506 [154]	np	250 [76]	486 [148]	486 [148]	np	346 [105]	306	285 [285]	201	nd	nd
E23-1	710 (C) [216]	n	0 to 5 [0-1.5]	nd	665 [203]	nd	704 [215]	np	689 [210]	665 [203]	489 [149]	477 [145]	454 [138]	nd	np	454 [138]	417 [127]	np	np	nd	np	399.63 [121.8]	Mar-99
E23-2	721 (C) [220]	0	720 [220]	nd	nd	nd	np	720 [219]	np	605 [184]	520 [159]	500 [152]	484 [148]	290 [88]	430 [131]	430 [131]	nd	np	nd	166 [51]	264	401.59 [122.4]	Dec-94
E24-4	697 (C) [212]	20 [6.1]	696 [212]	nd	646 [197]	nd	np	696 [212]	np	nd	nd	nd	431 [131]	270 [82]	426 [130]	466 [142]	nd	np	np	nd	np	399.53 [121.8]	Aug-98
E24-7	716 (C) [218]	n	716 [218]	nd	652 [199]	nd	716 [218]	708 [216]	np	708 [216]	500 [152]	486 [148]	448 [137]	380 [116]	336 [104]	336 [104]	296 [90]	nd	nd	70 [21]	266	400.52 [122.1]	Jun-97
E24-16	715 [217]	n	715 [217]	nd	656 [200]	nd	714 [218]	706 [215]	626 [191]	616 [188]	460 [140]	425 [130]	410 [125]	nd	np	np	np	np	np	nd	np	399.41 [121.7]	Mar-99
E24-17	716 [218]	n	716 [218]	nd	659 [201]	nd	711 [217]	706 [215]	np	706 [215]	464 [141]	524 [160]	421 [128]	295 [90]	421 [128]	421 [128]	np	np	np	nd	np	399.59 [121.8]	Apr-97
E24-18	716 [218]	n	716 [218]	nd	664 [202]	nd	715 [218]	699 [213]	np	699 [213]	506 [154]	481 [147]	456 [139]	325 [99]	391 [119]	391 [119]	np	np	np	nd	np	399.3 [121.7]	Mar-99
E24-21	714 [218]	n	714.40 [218]	714 [218]	636 [194]	544 [166]	706 [215]	702 [214]	np	702 [204]	479 [146]	473 [144]	444 [135]	Np	np	np	np	np	np	nd	np	404.88 [123.4]	Apr.-01
E37-47A	716 [218]	n	716 [218]	nd	nd	nd	np	716 [218]	np	716 [218]	526 [160]	np	474 [145]	284 [87]	432 [132]	412 [126]	np	350 [107]	304	231 [70]	201	405 [123.4]	Oct-96

**Table 4.1. (contd.)**


Borehole	Surface Elevation [brass cap or casing (C)]	Back - fill	Surface Sand (S)	Top of Layer 3 (L3)	Top of Layer 2 (L2)	Top of Layer 1 (L1)	Top of Sandy Gravel 1 (G1)	Top of Sand 1 (S1)	Top of Sandy Gravel 2 (G2)	Top of Sand to Silty Gravelly Sand 2 (S2)	Top of Gravel 3 (G3)	Top of Silty Sand 3 (S3)	Top of Gravel 4 (G4)	Thickness of Hanford Formation	Top of Ringold	Top of Unit E	Silt	Top of Lower Mud	Top of Unit A	Thickness of Ringold	Basalt	Water Table Elevation	Date of Water Level Measurement
C3828	737.5 [225]	n	737.53 [225]	nd	575 [175]	nd	np	737.5 [225]	np	728.5 [222]	503 [153]	475 [145]	460 [140]	nd	np	np	np	np	np	nd	np	396.2 [120.8]	Apr.-02
C4069	nd	n	Approx 725 [221]	710 [216]	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
C4070	nd	n	Approx 725 [221]	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
C4071	nd	n	Approx 725 [221]	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd

np – not penetrated; nd – not determined; n – not present. Letter designations are also shown in Figs. 4.14, 4.15, 4.16, and 4.17

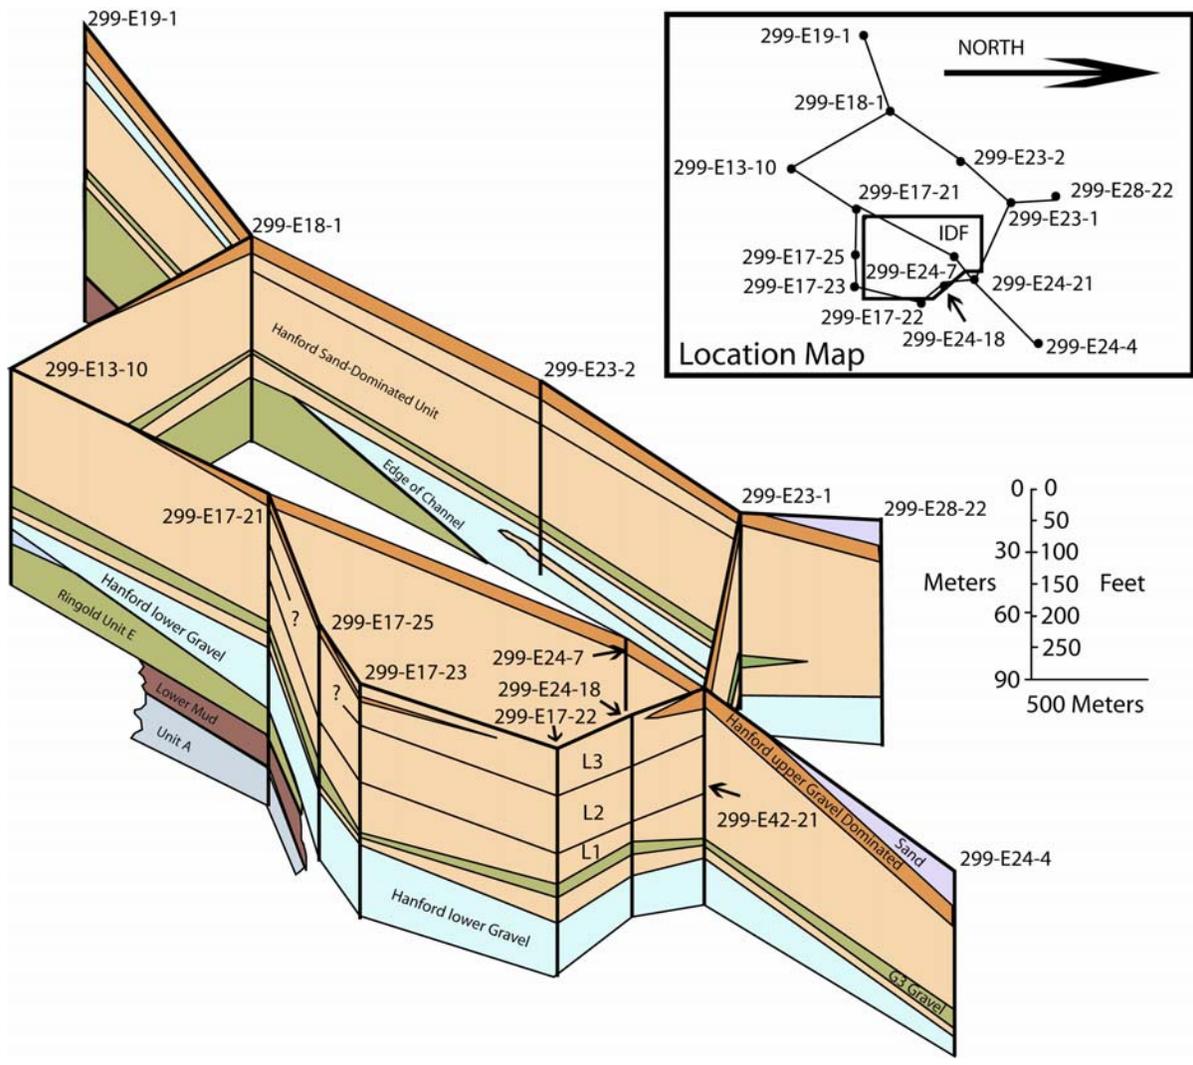

**Figure 4.5. Fence Diagram of the IDF Site and Vicinity**

- Hanford formation (informal), sand-dominated facies
  - Layer 3 (extends into upper gravel-dominated facies)
  - Layer 2
  - Layer 1
- Hanford formation, lower gravel-dominated facies
- Ringold Formation
  - Unit E
  - Lower Mud
  - Unit A
- Columbia River Basalt Group.

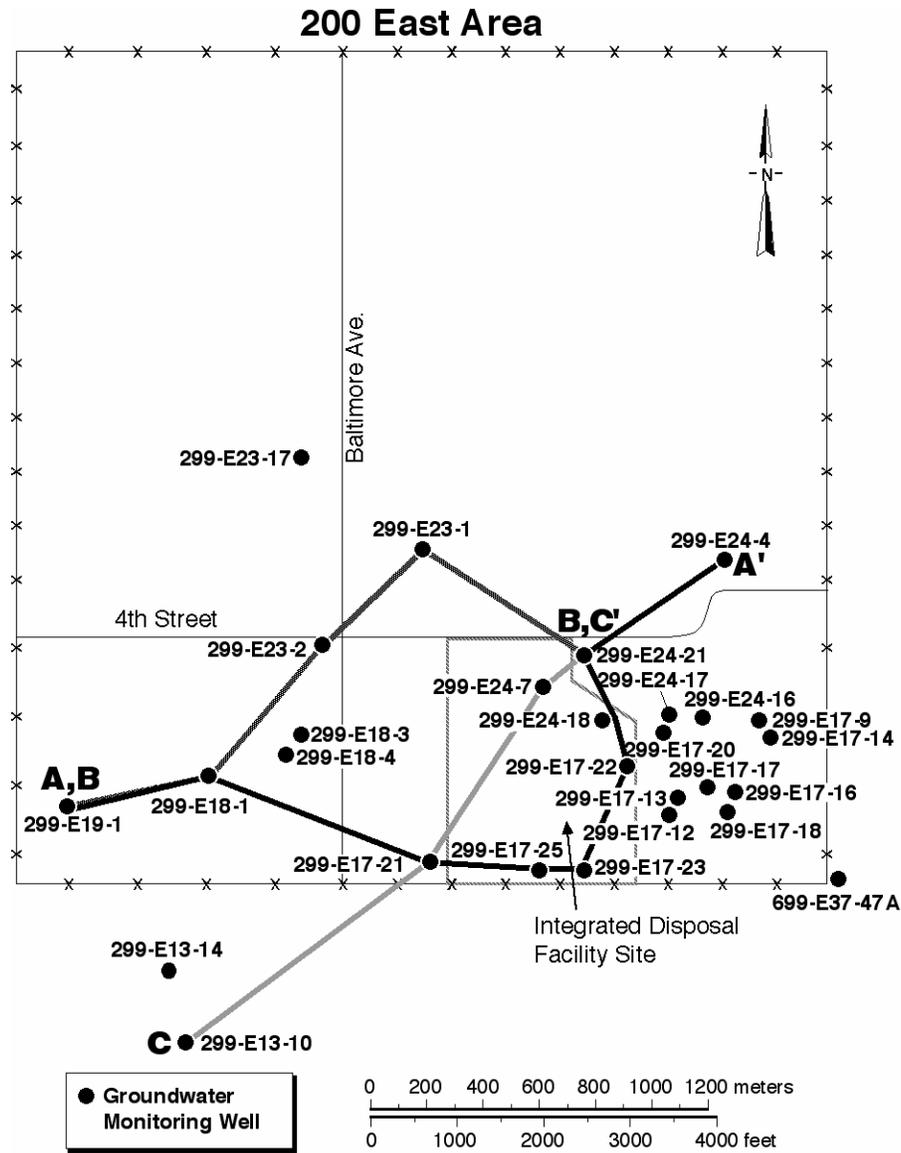

G04.020051.4

**Figure 4.6. Map Showing the Locations of Cross-Sections A - A', B - B', and C - C'**

The sequences of sandy gravels to gravelly sands (G1, G2, G3, G4) and sandy to silty sandy units (S, S1, S2, S3) can be recognized in the Hanford formation layers (Table 4.1). These units are not formally defined but are tentatively correlated across the site. Additional work will be necessary to verify these correlations. They are shown on the cross sections and in Table 4.1.

#### 4.2.2.1 Columbia River Basalt Group

Previous studies (Reidel and Fecht 1994a) have shown that the youngest lava flows of the Columbia River Basalt Group at the 200 East Area are those of the 10.5 million-year old Elephant Mountain Member. This member underlies the entire 200 East Area and surrounding area and forms the base of the

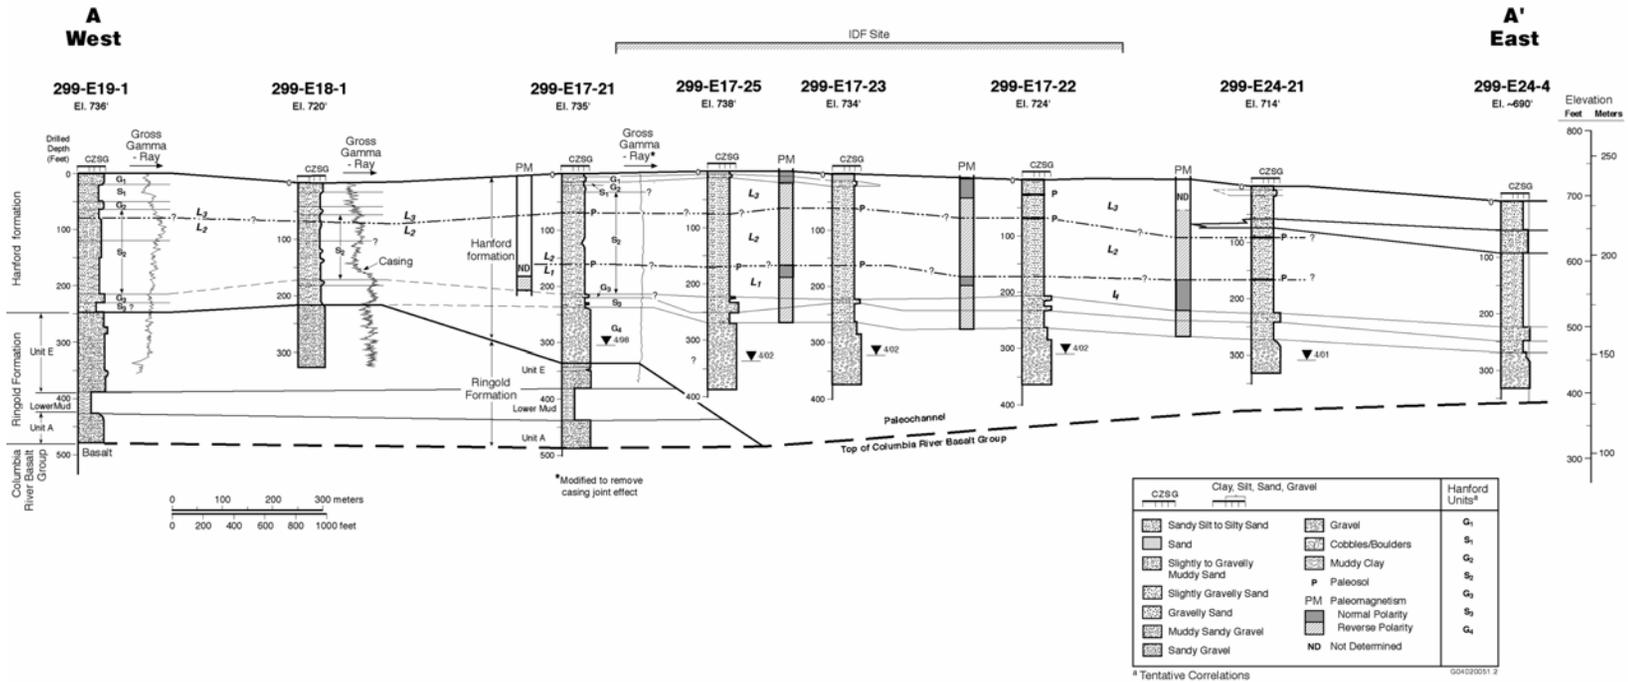


Figure 4.7. Cross-Section A – A' Across the IDF Site. See Figure 4.6 for the location of the cross section.

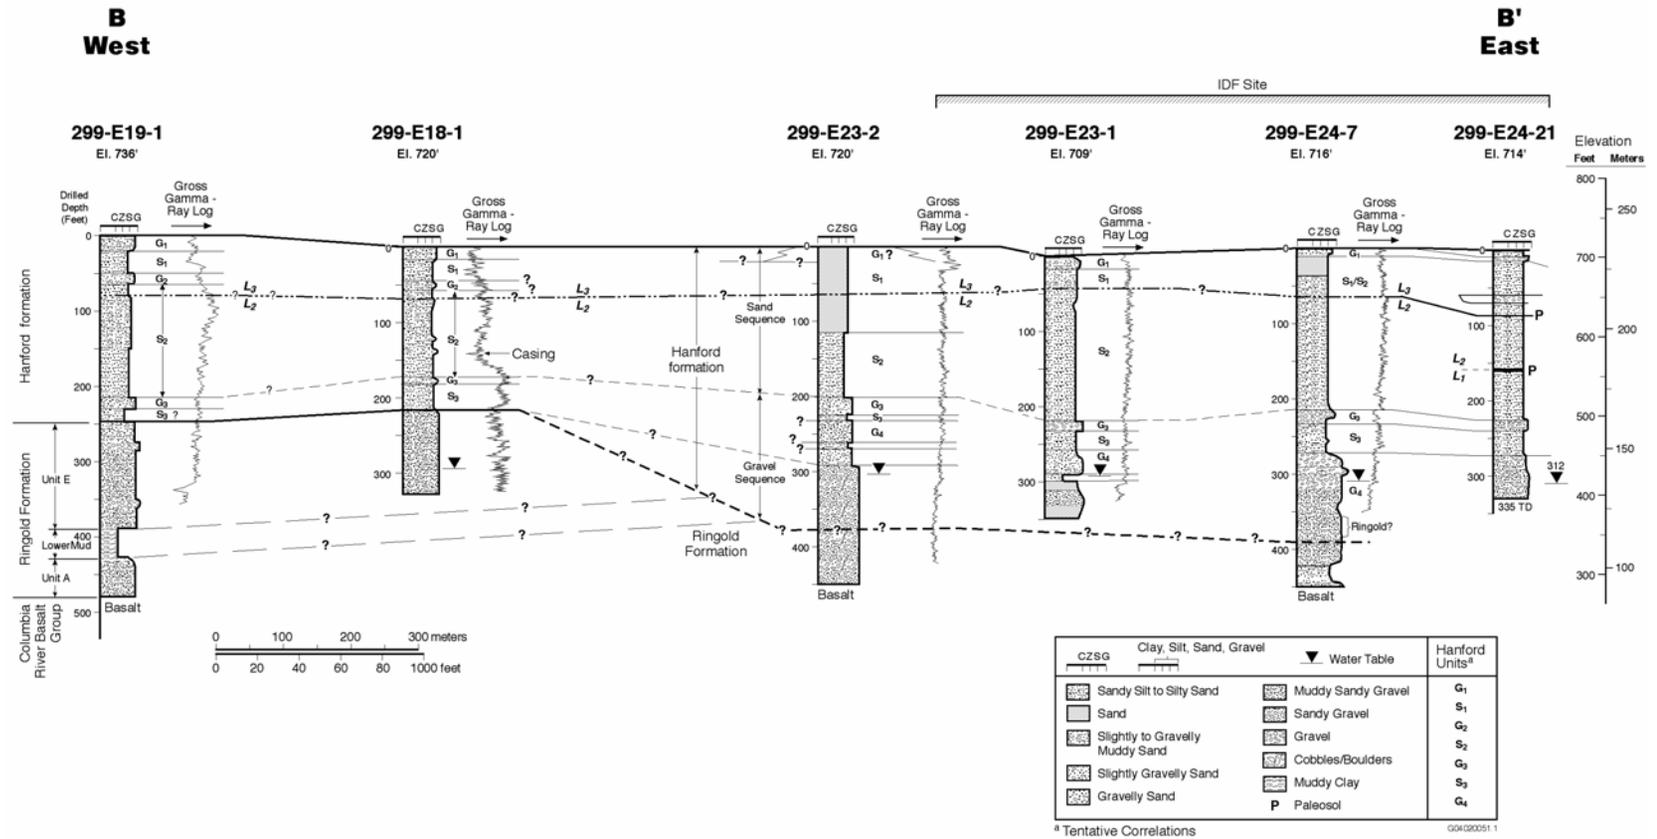


Figure 4.8. Cross-Section B – B' Across the IDF Site. See Figure 4.6 for the location of the cross section.

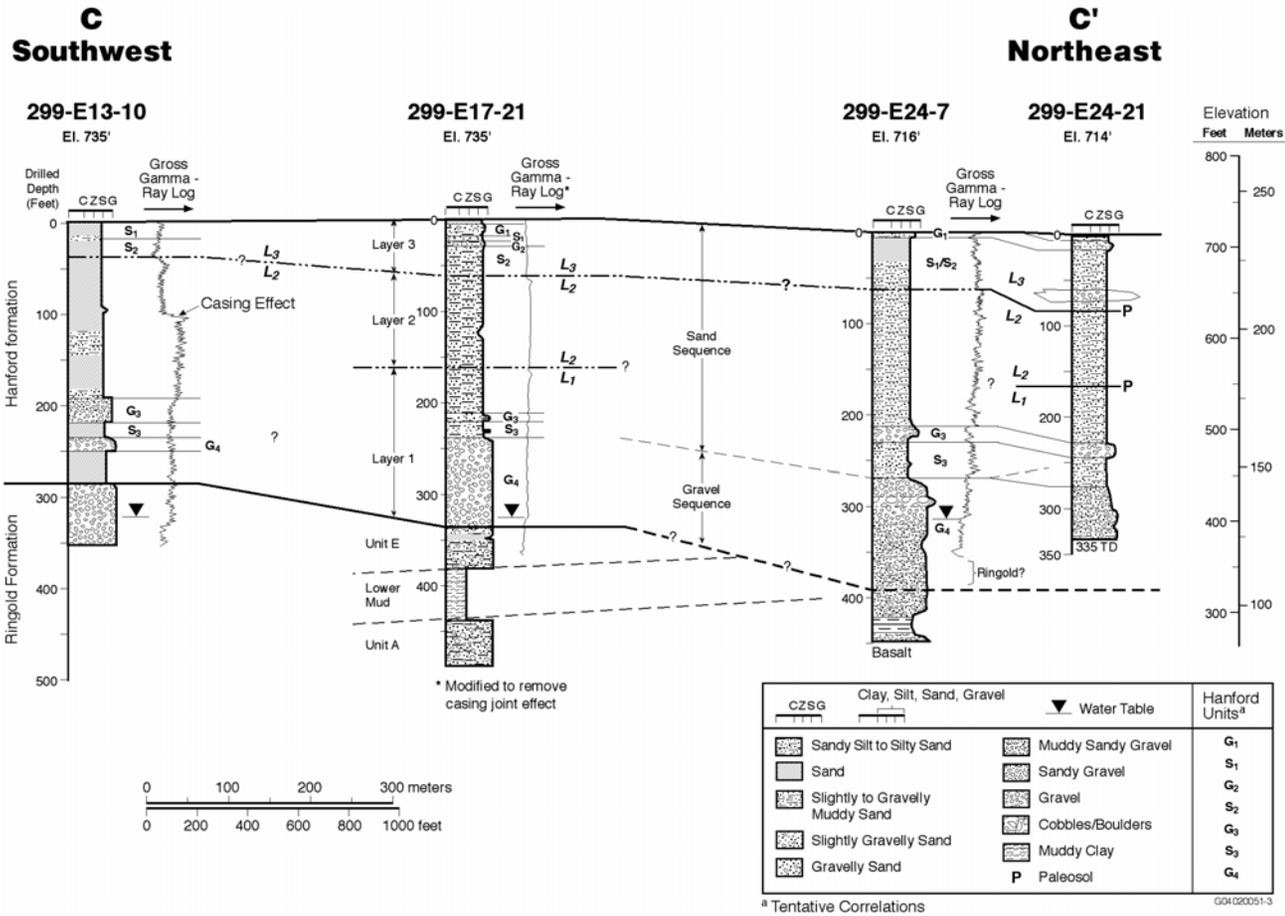


Figure 4.9. Cross-Section C – C' Across the IDF Site. See Figure 4.6 for the location of the cross section.

unconfined aquifer. No erosional windows are known or suspected to occur in the new IDF site area. Figure 4.2 shows the elevation of the top of the Columbia River Basalt Group under the 200 East Area and vicinity.

#### **4.2.2.2 Ringold Formation**

Because few boreholes penetrate much of the entire Ringold Formation at the IDF site, data are limited. The Ringold Formation reaches a maximum thickness of 285 ft (87 m) on the west side of the IDF site and thins eastward. It consists of three units of Lindsey's (1996) Member of Wooded Island. The deepest unit encountered is the lower gravel, Unit A. Lying above unit A is the lower mud and overlying the lower mud is an upper gravel, unit E. The upper Ringold (sand and silt of the member of Taylor Flat) is not present at the IDF site but is present east of the site. Unit A and unit E are equivalent to mapping unit PLMcg, Pliocene-Miocene continental conglomerates of Reidel and Fecht (1994a, 1994b). The Lower Mud is equivalent the mapping unit PLMc, Pliocene-Miocene continental sand, silt, and clay beds of Reidel and Fecht (1994a, 1994b).

##### **4.2.2.2.1 Unit A**

Unit A underlies the lower mud and overlies the Columbia River Basalt Group. Only 3 boreholes penetrated Unit A in the study area (Table 4.1). Unit A is 61 ft (19 m) thick on the west side of the IDF site but pinches out to the northeast (Figure 4.5, 4.7, 4.8, and 4.9). Unit A is sandy gravel consisting of both felsic and basaltic rocks. There are occasional yellow to white interbedded sand and silt with silt and clay lenses. Green-colored, reduced-iron stain is present on some grains and pebbles. Although the entire unit appears to be partially cemented, the zone produced abundant water in borehole 299-E17-21.

##### **4.2.2.2.2 Lower Mud**

A maximum of sixty-one feet (19 m) of the lower mud was encountered at the IDF site. The upper most part (about 4 ft, 1.2 m) consists of a yellow sandy to silty mud. The silty mud grades downward into about 34 ft (10 m) of blue mud with zones of silt to slightly silty mud. The blue mud, in turn, grades down into 23 ft (7 m) of brown silty mud with organic rich zones and occasional wood fragments. The lower mud, like unit A, is absent in the center of the IDF site (Figures 4.7, 4.8 and 4.9).

##### **4.2.2.2.3 Unit E**

Unit E overlies the lower mud and underlies the Hanford formation. Unit E is as much as 50 ft (15 m) of sandy gravel to gravelly sand with scattered large pebbles and cobbles up to 10 inches in size. The gravel consists of both felsic and basaltic clasts, which are well rounded with a sand matrix supporting the cobbles and pebbles. Cementation of this unit ranges between slight and moderate. The upper contact of unit E is not easily identified at the IDF site. In the western part of the study area, unconsolidated gravels of the Hanford formation directly overlie the Ringold Unit E gravels, making exact placement of the contact difficult. The dominance of basalt in the Hanford formation and the general absence of any cementation are the key criteria used for distinguishing them here (Reidel et al. 1998). In the central and northeast part of the area, Unit E is interpreted to have been eroded (Figure 4.5, 4.7, 4.8, and 4.9). Unconsolidated gravels and sands typical of the Hanford formation replace them.

#### 4.2.2.2.4 Upper Ringold

The upper Ringold is not present at the IDF site but has been identified in the southeast corner of 200 East Area in borehole 299-E37-47A (Lindberg et al. 1997). These sediments pinch out or were eroded before reaching the IDF site.

#### 4.2.2.2.5 Unconformity at Top of Ringold Formation

The surface of the Ringold Formation is irregular in the IDF site area (Figure 4.11). A NW-SE trending erosional channel is centered along the northeast portion of the site. The deepest portion near boreholes 299-E24-7 and 299-E24-21 (Figure 4.2) is in the northern portion of the IDF site. This trough is interpreted to be a smaller part of a much larger trough under the 200 East Area resulting from scouring by the Missoula floods or post-Ringold fluvial incision prior to the Missoula floods.

#### 4.2.2.3 Hanford Formation

The Hanford formation is as much as 380 ft (116 m) thick in and around the IDF site. It thickens in the erosional channel cut into the Ringold Formation and thins to the southwest along the margin of the trough. The Hanford formation reaches its greatest thickness along a NW-SE trending trough under the eastern part of the IDF site (Figures 4.5, 4.7, 4.8, and 4.9).

The Hanford formation consists of poorly sorted pebble to cobble gravel and fine- to coarse-grained sand, with lesser amounts of interstitial and interbedded silt and clay. In previous studies of the IDF site, the Hanford formation was described as consisting of three units: an upper and lower gravelly facies and a sandy facies between the two gravelly units. The upper gravelly facies appears to be thin or absent in parts of the IDF area. The silt-dominated, slackwater facies (Touchet Beds) or interbedded sand- and silt-dominated facies is not present. In Table 4.1, the elevations of the tops of several of the more distinct and tentatively correlated units of the Hanford formation are given.

##### 4.2.2.3.1 Basal Gravel-Dominated Facies

The lowermost part of the Hanford formation encountered in the IDF site consists of the gravel-dominated facies (Table 4.2). At the northeast end of the IDF site, the Hanford formation is over 109 feet (33m) thick in borehole 299-E24-21 and thins to the southwest (88 feet thick in 299-E17-21; Figure 4.9). The lower gravel decreases in elevation across the IDF site (Figure 4.10). Drill core and cuttings from these boreholes indicate that the unit is clast-supported pebble- to cobble-gravel with minor amounts of

**Table 4.2. Thickness of Basal Gravel-Dominated Facies at the IDF Site**

Borehole	Thickness of Gravel Feet (Meters)
E17-21	88 (27)
E17-22	>86 (>26)
E17-23	>81 (>25)
E17-25/C3828	>63 (>19)
E24-21	>109 (>33)

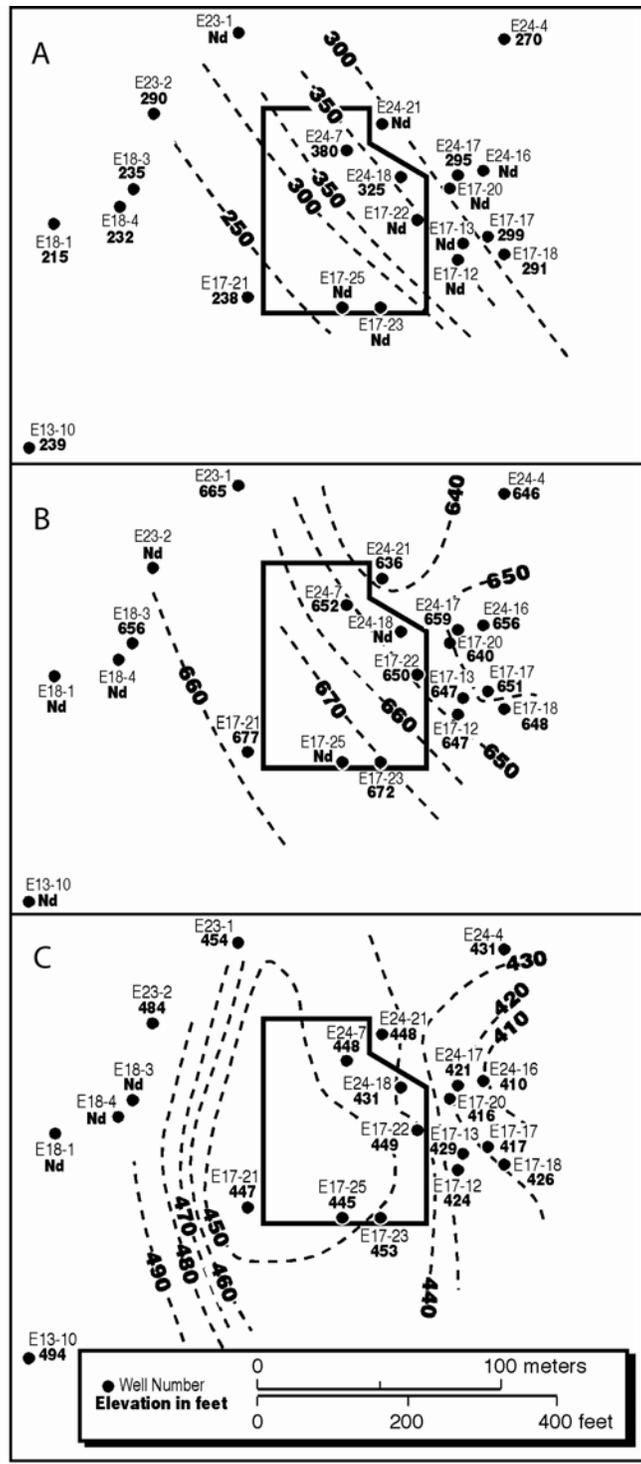


Figure 4.10. A. Thickness of the Hanford Formation Under the IDF Site. B. Elevation of Layer 2 under the IDF site. C. Elevation of the top of the lower-most gravel dominated under the IDF site. Dashed lines show approximate contour or isopleth.

sand in the matrix. The cobbles and pebbles are almost exclusively basalt with no cementation. In outcroppings these deposits display massive bedding, plane to low-angle bedding and large-scale planar forset cross-bedding, but such features typically cannot be observed in borehole core. The gravel is interpreted to be Missoula flood gravels deposited in the erosional channel carved into the underlying Ringold Formation. The southwest part of the IDF site lies atop the western margin of this channel.

This basal gravel sequence is equivalent to the gravel-dominated facies of DOE (2002), and is equivalent to mapping unit Qfg1, Missoula Outburst flood gravel deposits of Reidel and Fecht (1994a, 1994b).

#### 4.2.2.3.2 Sand-Dominated Facies

The upper portion of the Hanford formation ranges from 270 (82 m) to 283 feet (186 m) (Table 4.3) of fine to coarse-grained sand with minor amounts of silt and clay and some gravelly sands. This sequence is equivalent to the sand-dominant facies of DOE (2002) and is equivalent to the following mapping units of Reidel and Fecht (1994a, 1994b): Qfs1, Qfs2, and Qfs3, Missoula Outburst Flood Deposits consisting of sand, silt, and clay.

The texture of the sand-dominated facies changes across the IDF site reflecting a higher energy environment for the floodwater to the northeast and east part of the site. In Figure 4.11 the percentage of gravel and sand increase from the west (299-E19-1) to the northeast (299-E24-4). The percentage of sand in 299-E19-1 is around 85% but the percentage of sand increases to over 90% at the expense of silt and mud in 299-E18-4, 299-E24-7 and 299-E24-21. Borehole 299-E24-4 lies northeast of the IDF site and lies in the main part of the channel. Here sand decreases at the expense of increasing gravel.


#### *Paleosols*

Three main paleosols (soils) were identified in the sand-dominated facies core and one gravel unit that allow the sand-dominated facies to be subdivided into at least three layers. Table 4.4 summarizes the elevations and drilled depths of the paleosols in IDF boreholes and Table 4.1 provides the elevations of these paleosols as determined from evaluation of existing boreholes from around the IDF Site.

The paleosol horizons represent quiet time intervals when no sediments were deposited and soil development took place. They are interpreted to represent periods of non-deposition between Missoula flood deposition. The paleosols have abrupt upper contacts and less well defined lower contacts. The paleosols are typically 4-6 inches thick, bioturbated, a lighter color than the surrounding sediments, and slightly higher moisture content (e.g., C3177-170 5.26% in

**Table 4.3. Thickness of Sand-Dominated Facies in IDF Boreholes**

Borehole	Thickness in feet (m)
299-E17-21	283 (86)
299-E17-22	273 (83)
299-E17-23	280 (85)
299-E17-25	277 (84)
299-E24-21	270 (82)

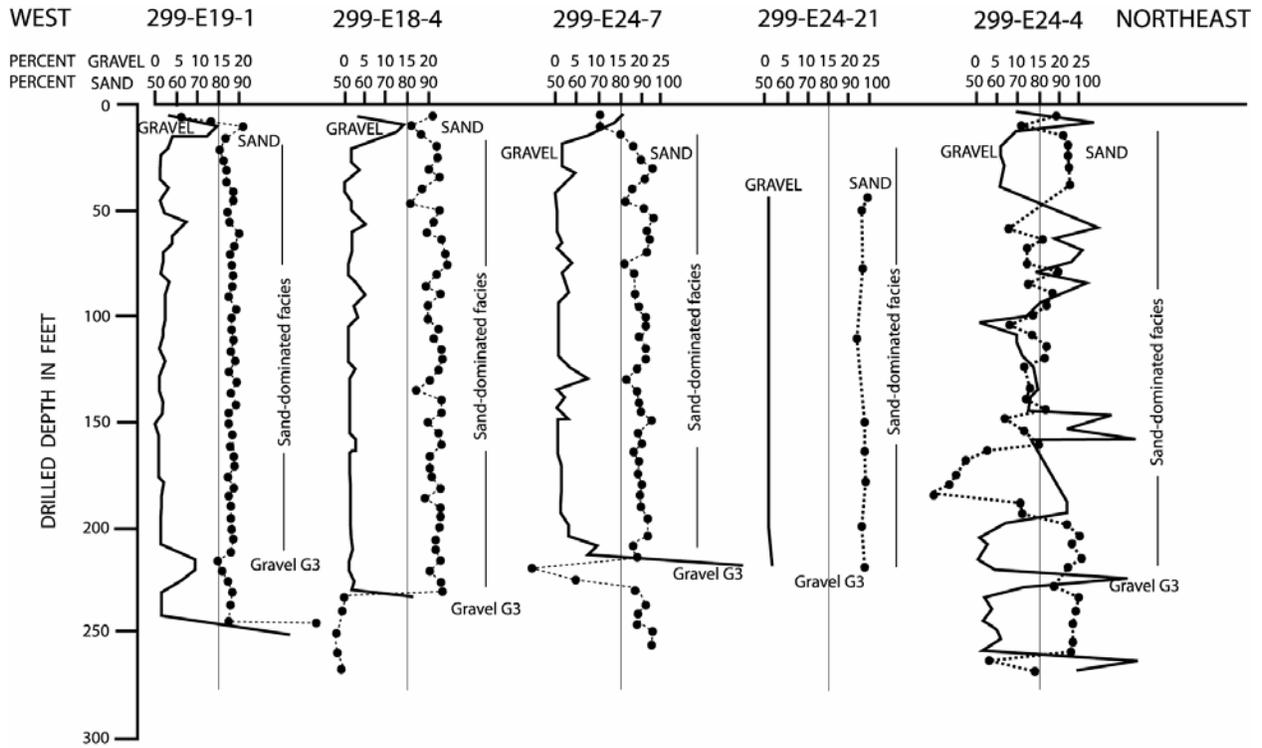

**Figure 4.11. Percentage of Sand and Gravel Present in the Upper Part of the Sand-Dominated Facies in Selected Boreholes Near the IDF Site. For comparison a reference line is drawn at 80% sand and 15% gravel.**

**Table 4.4. Elevation and Drilled Depths to Paleosols in IDF Boreholes**

Borehole	Paleosol 1 Elevation (drilled depth in feet (m))	Thickness of Layer 1 in feet (m)	Paleosol 2 Elevation (drilled depth in feet (m))	Thickness of Layer 2 in feet (m)	Paleosol 3a Elevation (drilled depth in feet (m))	Thickness of Layer 3a in feet (m)	Surface (Paleosol 3b) Elevation (drilled depth in feet)	Thickness of Layer 3 in feet (m)
E17-21	572 (174)	84	677 (206)	105	ND	ND	730 (222)	53 (16)
E17-22	ND	ND	650 (198)	ND	693 (211)	43 (13)	723.7 (220.6)	73 (22)
E17-23	576 (175)	>204	672 (204)	96 (29)	ND	ND	734.4 (223.7)	62 (19)
E17-25/C3828	575 (175)	>193	ND	ND	ND	ND	738.3 (224.9)	ND
E24-21	545 (166)	>210	636 (194)	91	ND	ND	714.4 (217.6)	78 (24)
C4069	ND	ND	ND	ND	ND	ND	Approx 710 (216)	ND

ND – Not detected

Horton et al. 2003). Calcium carbonate development is also present suggesting that these paleosols represent the Stage I carbonate morphology of Birkeland et al. (1991).

**Layer 1.** Layer 1 varies from 84 feet (26 m) thick in borehole 299-E17-21 to greater than 210 feet (64 m) in borehole 299-E24-21 (Table 4.4). A paleosol of sand and silt poorly cemented by  $\text{CaCO}_3$  (Stage I or II carbonate development) forms a poorly developed layer. Only the upper several inches have poor cementation but elevated concentrations of  $\text{CaCO}_3$  extend to a depth of about 10 ft (3 m) below the top.  $\text{CaCO}_3$  fragments and grain coatings were found at greater depths.

The lower 20 feet (6.1 m) of Layer 1 consists of interbedded sands and gravels (Figure 4.7, 4.8, and 4.9). The basal gravel sequence underlying Layer 1 appears to grade upward into a sequence of interbedded sands and gravels. At least three upward fining zones of gravels to sands were recognized in Layer 1 (Reidel et al. 1998).

Planar-laminar sands with minor silt lenses dominate the upper part of Layer 1. This sequence consists of fining upward sands, well-compacted, slightly  $\text{CaCO}_3$ -cemented sands, and well-laminated sands. As noted above,  $\text{CaCO}_3$  associated with development of the paleosol extends well down into this layer.

Layer 1 is part of the sand-dominated and lower gravel-dominated facies of DOE (2002) and is part of mapping unit Qfs1 of Reidel and Fecht (1994a, 1994b). Mapping unit Qfs1 are Missoula Outburst Flood Deposits consisting of sand, silt, and clay that have a reversed magnetic polarity capped by a normal polarity. Layer 1 may be as much as 1 to 1.7 million years old based on interpretation of the paleomagnetism (Appendix B) that suggests the normal polarity is equivalent to the Jaramillo subchron (0.99 to 1.07 Ma) (Pluhar et al. 2003).

**Layer 2.** Layer 2 is capped by a paleosol that occurs at approximately 650 feet (198 m) elevation under the IDF site but the surface of layer 2 decreases in elevation eastward under the site (Figure 4.10B). The upper 90 feet (27.4 m) of Layer 2 is principally fine- to medium-grained sand with minor amounts of interstitial silt. Throughout the sands are disseminated flakes of  $\text{CaCO}_3$  and  $\text{CaCO}_3$ -cemented sand grains suggesting Stage II carbonate development. Several fining upward zones were recognized as well as well-compacted zones of sand and silt with faint laminations.

Layer 2 is also part of the sand-dominated facies of DOE (2002), and is part of mapping unit Qfs1 of Reidel and Fecht (1994a, 1994b). The mapping unit is a Missoula Outburst Flood Deposit consisting of sand, silt and clay that is older than 13 ka and younger than 720 ka. Mapping unit Qfs2 has a normal magnetic polarity. This layer is probably part of the Matuyama reversed polarity that began about 0.78 Ma.

**Layer 3.** Layer 3 is the upper most sediment sequence at the IDF site. Layer 3 thickens across the IDF site. It is 53 feet (16 m) thick at the southwest end of the site (299-E17-21) and thickens to 78 feet (24 m) thick at the northeast end of the site in borehole 299-E24-21. It consists of sand-dominated facies and has two polarity reversals – a reverse polarity at the base of the sequence and a normal polarity between the surface and the top of the reverse polarity (Appendix B). A paleosol at the top of the reverse

polarity sediments was identified in borehole 299-E17-22 but was not recognized in any other borehole (Table 4.4, Appendix B). That paleosol is used to divide the layer into two parts where present.

The upper-most paleosol is a 1.1-ft (3 m) thick, oxidized and leached zone of fine-grained sand and silt with some pebbles with a 4-in. (10-cm) caliche zone (sand and silt cemented by  $\text{CaCO}_3$ ). Several distinct gravelly sands are present within several feet of the paleosol at the top of this layer. This forms the surface of much of the IDF site north of the eolian deposits.

The lower 25 to 30 ft (8 to 10 m) of Layer 3 consists principally of sand with interstitial silt and minor silt lenses. In borehole 299-E17-22, this layer is capped by a paleosol and is the top of the reversed polarity zone (Appendix B). Several minor silt lenses are locally present but are discontinuous.

Layer 3 is interpreted to consist of the upper gravelly sequence and the upper part of the sandy sequence defined in previous studies. It is part of the sand-dominated facies and the upper gravel dominated facies of DOE (2002). This is equivalent to mapping units Qfs 1,2, and 3 of Reidel and Fecht (1994a, 1994b) - Outburst Flood Deposits consisting of sand, silt and clay. An ash from the 13 ka eruption of Mt. St. Helens (Set S Ash) is typically found near the top of this unit in many places throughout the Pasco basin. The ash was not recognized in any of the boreholes near the IDF site but was identified in a pit excavated a few hundred feet west of borehole 299-E17-21 and in the PUREX tunnels east of the IDF site.

#### **4.2.2.4 Eolian Unit**

Eolian deposits cover the southern part of the new IDF disposal site (Figure 2.1). Borehole 299-E17-21 was sited on a stabilized sand dune. The eolian unit is composed of fine- to coarse-grained sands with abundant silt, as layers and as material mixed with the sand. Calcium-carbonate coating found on the bottom of pebbles and cobbles in drill core through this unit is typical of Holocene caliche development in the Columbia Basin. This unit is equivalent to mapping unit Qd, Holocene Dune Sand, of Reidel and Fecht (1994a, 1994b).

#### **4.2.2.5 Clastic Dikes**

Although there is no evidence for clastic dikes on the surface of the IDF site, a clastic dike was encountered during the drilling of well 299-17-24 between 155.5' and 157.5' (Reidel and Ho, 2002, Figure 4.11). This suggests that clastic dikes are present at the site although not readily apparent at the surface.

### **4.3 Mineralogy**

Mineralogy was determined for sediment from two IDF boreholes: 299-E17-21 (Mattigod et al. 2000) and 299-E24-21 (Horton et al., 2003). This section summarizes those studies.

### 4.3.1 Borehole 299-E17-21

#### 4.3.1.1 Introduction

This section summarizes the results of the mineralogical characteristics determined from borehole 299-E17-21 by Mattigod et al (2000). The following is taken directly from their report.

#### 4.3.1.2 Materials

Mattigod et al. (2000) selected eight representative core samples from the Hanford formation for analysis (Table 4.5). These samples consist mainly of sand-size material derived from roughly equal proportions of basaltic and felsic parent materials. Many of the samples contained calcium carbonate as coatings, discrete particles, and cement. Each sample was homogenized, and subsamples were drawn for particle size separation as described in Mattigod et al. (2000).

**Table 4.5. Description of Selected Core Sample from Borehole 299-E17-21 (from Reidel et al. 1998)**

Core Number	Core Interval (ft)	Layer	Description
7A	45.9 – 47.9	3	Medium to fine-grained sand with minor silts; sparse pebbles up to 1 inch; 50% basalt, 50% felsic. 45.9 CaCO <sub>3</sub> cementing sand into poorly consolidated nodules.
10A	57.8 – 59.8		57.8 – 58.1 Medium- to coarse-grained sand with some CaCO <sub>3</sub> 58.1 – 58.5 Cemented soil zone; fine- to medium-grained sand 58.5 – 59.8 Medium-grained sand
14A	80.3 – 82.8		Compacted medium- to fine-grained sand; some silt; 50% basalt, 50% felsic; minor CaCO <sub>3</sub> probably as grain coatings.
16A	100.5 – 103.0	2	Medium-grained sand; some CaCO <sub>3</sub> coating grains.
20A	129.7 – 132.2		Fine- to medium-grained sand, some silt; less than 50% basalt; some CaCO <sub>3</sub> as discrete particles and grain coatings.
24A			Fine- to medium-grained sand; uniform grain size; 50% basalt, 50% felsic; no bedding; well compacted, minor CaCO <sub>3</sub> cement.
31A		1	Fine-grained sand compacted by not cemented; faint bedding. 219.0 Pebbles of basalt and andesite; rounded.
35A	239.5 – 241.5		239.5 – 240.0 Granular to pebbly gravel (1/8 inch), mainly basalt; no sand matrix, open framework.
			240.0 – 240.4 Grading into coarser gravel (1/4 to 1/2 inch); no sand matrix, open framework. 240.4 – 240.9 Coarse gravel with sand matrix; gravel up to 1 inch in diameter; coarse-grained sand; 50% basalt, 50% felsic.

### 4.3.1.3 Texture

The particle size analysis data indicated that the sand content of these soils ranged from about 79 to 98%, the silt content varied from about 1 to 15% and clay fraction constituted about 0.6 to 7% (Table 4.6). The textural data showed that all the sediment samples except 10A and 14A were sands. The samples 10A and 14A had sandy loam texture.

### 4.3.1.4 Mineralogy

The mineralogical composition of the sand, silt and clay fractions of the sediments are tabulated (Tables 4.7 to 4.9). About 5% by weight of corundum was detected in all sand samples which was contamination resulting from grinding the soil in a corundum containing mortar and pestle. The semiquantitative mineral contents of sand fractions therefore, were normalized to eliminate the corundum content.

The dominant minerals in the sand fractions of all samples were quartz (~66 to 82% by mass) and feldspars (~15 to 30%) (Table 4.7). These minerals (quartz, and plagioclase and orthoclase feldspars) constituted approximately 92 to 99% of the total mass of the sediment samples. Trace quantities of muscovite mica, chlorite and amphibole were also detected in the sand fractions (Table 4.7). The silt fractions of these samples were also dominated by quartz (~49 – 76%) and feldspars (~19 – 44%)

**Table 4.6. Particle Size Distribution of Selected Sediment Samples from Borehole 299-E17-21**

Sample #	Layer	Sand >75 $\mu\text{m}$	Silt 75 – 2 $\mu\text{m}$	Clay <2 $\mu\text{m}$
7A	3	92.1	5.5	2.4
10A		82.1	14.6	3.3
14A		79.4	13.6	7.0
16A	2	94.7	3.8	1.4
20A		90.0	8.8	1.2
24A		91.3	6.1	2.6
31A	1	88.4	10.0	1.5
35A		98.3	1.1	0.6

**Table 4.7. Semiquantitative Estimates (wt %) of Minerals Identified in Sand Fractions of Selected Sediment Samples from Borehole 299-E17-21**

Mineral Group	Mineral Species	Ideal Chemical Composition	Sample #								
			Layer 3		Layer 2			Layer 1			
			7A	10A	14A	16A	20A	24A	31A	35A	
Quartz	Quartz	$\text{SiO}_2$	82	74	66	76	76	66	74	71	
Feldspar	Plagioclase	$(\text{Ca}, \text{Na})(\text{Al}, \text{Si})\text{AlSi}_2\text{O}_8$	10	20	30	20	20	31	21	25	
Feldspar	Orthoclase	$\text{KAlSi}_3\text{O}_8$	5	5	1	1	1	1	1	1	
Mica	Muscovite	$\text{KAl}_2(\text{AlSi}_3)\text{O}_{10}(\text{OH})_2$	1	1	1	1	1	1	1	1	
Chlorite		$(\text{Fe}, \text{Al}, \text{Mg})_6(\text{Al}, \text{Si})_4\text{O}_{10}(\text{OH})_8$	1	1	1	1	1	1	1	1	
Amphibole		$\text{Ca}_2\text{Fe}_3\text{Al}_2(\text{Si}_6\text{Al}_2)\text{O}_{22}(\text{OH})_2$	--	--	1	1	1	--	1	1	

(Table 4.8). Compared to the sand fractions, the silt fractions contained higher amounts of muscovite and chlorite (~1 – 5%), and amphibole (1 – 10%). Illitic mica, was the dominant mineral (~42 to 60% by mass) in the clay fractions of all the sediment samples (Table 4.9). About 14 to 25% chlorite and about 21 to 28% kaolinite were also found in clay fractions. Minor amounts (3 to 12%) of smectite (a high surface, high cation exchange capacity [CEC] mineral) were also detected in the clay fractions of all samples. Overall, quartz and feldspars dominated the sand fractions, whereas, the clay fractions were dominated by illitic mica and chlorite. These size-dependent mineral distributions are typical of primary (quartz and feldspars) and secondary (illite, chlorite, kaolinite and smectite) mineral occurrence in soils undergoing chemical weathering. The mineralogy of these sediments is typical of published mineralogy of other Hanford sediments (Schramke 1988).

Based on the mineralogy data (Tables 4.7 to 4.9) and the mass distribution of particles in each size fraction (Table 4.6), the mineral distribution on the bulk soil basis were computed (Tables 4.10 and 4.11). As expected, in all samples (predominantly sandy in texture), the minerals which are dominant in the sand and silt fractions namely quartz and feldspars also dominate the mineralogy of bulk soils (~91 – 95%). All other minerals occur in minor to trace concentrations.

**Table 4.8. Semiquantitative Estimates (wt %) of Minerals Identified in Silt Fractions of Selected Sediment Samples from Borehole 299-E17-21**

Mineral Group	Mineral Species	Ideal Chemical Composition	Sample #								
			Layer 3		Layer 2			Layer 1			
			7A	10A	14A	16A	20A	24A	31A	35A	
Quartz	Quartz	SiO <sub>2</sub>	65	71	49	61	64	62	73	76	
Feldspar	Plagioclase	(Ca, Na)(Al, Si)AlSi <sub>2</sub> O <sub>8</sub>	20	14	39	31	20	19	19	20	
Feldspar	Orthoclase	KAlSi <sub>3</sub> O <sub>8</sub>	5	5	5	1	1	5	5	1	
Mica	Muscovite	KAl <sub>2</sub> (AlSi <sub>3</sub> )O <sub>10</sub> (OH) <sub>2</sub>	5	5	5	5	1	5	1	1	
Chlorite		(Fe, Al, Mg) <sub>6</sub> (Al, Si) <sub>4</sub> O <sub>10</sub> (OH) <sub>8</sub>	5	5	1	1	5	5	1	1	
Amphibole		Ca <sub>2</sub> Fe <sub>3</sub> Al <sub>2</sub> (Si <sub>6</sub> Al <sub>2</sub> )O <sub>22</sub> (OH) <sub>2</sub>	--	--	1	1	10	5	1	1	

**Table 4.9. Semiquantitative Estimates (wt %) of Minerals Identified in Clay Fractions of Selected Sediment Samples from Borehole 299-E17-21**

Mineral Group	Mineral Species	Ideal Chemical Composition	Sample #								
			Layer 3		Layer 2			Layer 1			
			7A	10A	14A	16A	20A	24A	31A	35A	
Smectite	--	(Ca, Mg, Na, K) <sub>0.33</sub> Al <sub>2</sub> (Al <sub>0.33</sub> Si <sub>3.67</sub> )O <sub>10</sub> (OH) <sub>2</sub>	8	5	4	3	8	8	12	8	
Mica	Illite	K <sub>0.75</sub> Al <sub>2</sub> (Al <sub>0.75</sub> Si <sub>3.25</sub> )O <sub>10</sub> (OH) <sub>2</sub>	56	60	60	59	55	51	44	42	
Kaolinite	Kaolinite	Al <sub>4</sub> Si <sub>4</sub> O <sub>10</sub> (OH) <sub>8</sub>	22	21	22	21	22	26	28	25	
Chlorite	--	(Fe, Al, Mg) <sub>6</sub> (Al, Si) <sub>4</sub> O <sub>10</sub> (OH) <sub>8</sub>	14	14	14	17	15	15	15	25	

**Table 4.10. Calculated Mineral Distribution on Whole Soil Basis (wt %) in Selected Sediment Samples from Borehole 299-E17-21**

Mineral Group	Layer 3						Layer 2									Layer 1								
	7A			10A			14A			16A			20A			24A			31A			35A		
	Sand	Silt	Clay	Sand	Silt	Clay	Sand	Silt	Clay	Sand	Silt	Clay	Sand	Silt	Clay	Sand	Silt	Clay	Sand	Silt	Clay	Sand	Silt	Clay
Quartz	62	12	--	63	8	--	59	3	--	66	6	--	65	6	--	59	5	--	53	17	--	68	1	--
Feldspar	12	5	--	21	3	--	28	2	--	19	3	--	18	2	--	28	5	--	16	5	--	25	--	--
Mica	1	1	3	1	Tr	2	1	Tr	3	1	Tr	2	1	Tr	2	1	Tr	2	1	Tr	2	1	--	1
Chlorite	1	1	1	1	1	Tr	1	Tr	1	1	Tr	Tr	1	1	1	1	Tr	1	1	Tr	1	1	--	1
Amphibole	--	--	--	--	--	--	1	Tr	--	1	Tr	--	1	1	--	--	Tr	--	1	Tr	--	1	--	--
Smectite	--	--	Tr	--	--	Tr	--	--	Tr	--	--	Tr	--	--	Tr	--	--	Tr	--	--	Tr	--	--	Tr
Kaolinite	--	--	1	--	--	1	--	--	1	--	--	1	--	--	1	--	--	1	--	--	2	--	--	1

4.25

**Table 4.11. Calculated Mineral Distribution (wt %) in Selected Sediment Samples from Borehole 299-E17-21**

Mineral Group	Layer 3		Layer 2			Layer 1		
	7A	10A	14A	16A	20A	24A	31A	35A
	Wt %							
Quartz	74	71	62	72	71	64	70	69
Feldspars	17	23	30	22	20	30	22	25
Mica	4	3	4	3	3	2	3	2
Chlorite	3	2	2	1	3	2	2	1
Amphibole	--	--	1	1	2	Tr	1	1
Smectite	Tr	Tr	Tr	Tr	Tr	Tr	Tr	Tr
Kaolinite	1	1	1	1	1	1	2	1

### 4.3.2 Borehole 299-E24-21

Horton et al. (2003) characterized the physical properties for five composite and seven discrete depth samples from the second IDF borehole, C3177 (299-E24-21) to augment data previously collected for recharge studies and from borehole 299-E17-21. The following is their discussion on mineralogy and is taken directly from their report.

Two types of samples were collected: composite samples and discrete depth samples. The composite samples were made so that large volumes of well characterized material would be available for future studies. Five composite samples were made by combining and mixing several 2 ft sections of core. Each composite was homogenized in 5 gallon buckets before subsampling for analyses. Composite samples are identified in Table 4.12 along with the other seven samples.

#### 4.3.2.1 Mineralogy

X-ray diffraction (XRD) analysis of the IDF well 299-E24-21 (borehole C3177) sediments shows that all the samples are mineralogically similar. The bulk sediments are dominated by quartz and feldspar (both plagioclase and alkali-feldspar), with lesser amounts of mica, chlorite, and an amphibole.

Semi-quantitative analyses of the minerals in the bulk samples are provided in Table 4.13. Quartz concentrations range from 26 wt.% to 46 wt.%, with an average quartz concentration of  $38 \pm 6$  wt.%. Plagioclase feldspar is present at concentrations between 15 to 40 wt.% and potassium feldspar concentrations are between 16 to 31 wt.%. Plagioclase feldspar was more abundant than potassium feldspar in all samples except C3177-45, C3177-80.3, C3177-113.3, and C3177-170.4. Over all the feldspar content (both plagioclase and alkali feldspars) averaged about  $47 \pm 5$  wt.%. The amphibole phase comprised <4 wt.%, with the majority of samples having concentrations in the 2 to 4 wt.% range.

Samples from Layer 1 have higher plagioclase and lower quartz concentrations than do samples from Layer 2 or Layer 3. This reflects to the greater basalt content in Layer 1 than in the overlying layers (see the physical descriptions of samples in Table 4.12). Also, the paleosols and the silt lens have greater potassium feldspar concentrations than do the other samples.

**Table 4.12. Samples Collected from Well 299-24-21 (C3177)**

Sample Number <sup>(a)</sup>	Layer	Description
C3177-45	3	Composite sample; Hanford formation Layer 3
C3177-80.3	2	Sediment associated with a paleosol at the Hanford formation Layer 3/Layer 2 boundary; bedded, medium-grained sand; beds are distinguished by color and hardness
C3177-110		Composite sample; Hanford formation Layer 2
C3177-113.3		Silt lens in the Hanford formation Layer 2
C3177-150		Composite sample; Hanford formation Layer 2
C3177-168.5		Hanford formation Layer 2; bedded, medium-grained sand with a trace of silt; sample is from the base of the R2 (paleomagnetic) layer
C3177-170.4		1
C3177-200	Composite sample; Hanford formation Layer 1	
C3177-215	Composite sample; Hanford formation Layer 1	
C3177-223.5	Hanford formation Layer 1; coarse-grained sand; slight reaction to HCl; bottom of the N1 (paleomagnetic) layer	
C3177-242.0	Hanford formation Layer 1; sandy gravel; near the top of the R1 (paleomagnetic) layer	
C3177-251	Composite sample; Hanford formation Layer 1	
(a) Sample numbers are the borehole designation followed by the depth below ground surface from where samples were collected.		

**Table 4.13. Semi-quantitative XRD Results of Bulk Samples from Well 299-24-21 (C3177)**

Sample Number	Mineral Phase (wt-%)						Goodness of fit <sup>(a)</sup>
	Quartz	Amphibole	Plagioclase	K-Spar	Mica	Chlorite	
C3177-45	43	2	20	20	11	3	0.87
C3177-80.3	41	2	15	28	16	2	0.94
C3177-110	46	1	25	19	9	2	0.70
C3177-113.3	40	4	15	31	8	2	1.22
C3177-150	42	3	25	18	3	8	0.81
C3177-168.5	40	4	23	22	10	2	1.00
C3177-170.4	43	3	21	23	8	2	1.04
C3177-200	37	4	31	16	10	3	0.77
C3177-215	26	3	40	18	11	3	0.73
C3177-223.5	33	4	34	18	8	3	0.56
C3177-242.0	32	2	31	18	14	3	0.95
C3177-251	32	4	35	18	9	3	0.67
(a) Values closest to 1.0 represent an ideal refinement.							

Calcite was identified in the physical description of most of the sediments by effervescence with HCl (Reidel et al. 2001). However, calcite was not identified in any of the sediments by XRD. This suggests that calcite makes up less than a few percent of the samples and that the major calcite reflections were

masked by reflections from more abundant minerals in the diffraction analyses. The conversion of inorganic carbon to equivalent amounts of calcite also indicates that calcite is a minor phase (Horton et al. 2003).

Clay minerals identified in the bulk sediments include mica and chlorite. Mica concentrations range from 3 wt.% to 16 wt.% (the paleosol at 80.3 ft bgs), with an average concentration of  $10 \pm 3$  wt.%. The specific type of mica present in the samples was not determined by XRD but both muscovite and biotite were identified during physical descriptions of the samples. Chlorite concentrations were <3 wt.% in all sediments analyzed with the exception of sample C3177-150, which had 8 wt.% chlorite.

The results of x-ray diffraction analysis of the <1.4  $\mu\text{m}$  fraction of each sample are shown in Table 4.14. The clay fractions are dominated by four clay minerals: smectite, chlorite, illite, and kaolinite with minor amounts of quartz and feldspar.

No general trends are noted in the data in Table 4.14 from the twelve borehole samples. Smectite concentration ranges from 18 wt.% to 39 wt.%. Illite concentration varies from 43 to 54 wt.% with an average concentration of 48 wt.%. Chlorite and kaolinite are the least abundant of the clay minerals identified in the samples with concentrations equal to or less than 24 wt.% and 10 wt.%, respectively. Quartz and feldspar minerals were present as trace amounts in the clay fraction and therefore were not included in totals presented in Table 4.134.

The silt lens sample (C3177-113.3) has the highest smectite concentration and the lower paleosol sample (C3177-170.4) has the highest chlorite concentration. Overall, the mineralogy of the clay fractions from borehole C3177 are similar to clay fractions analyzed from clean boreholes and other composite samples of the Hanford formation sand-dominated sequence characterized by Serne et al. (2002).

**Table 4.14. Semi-Quantitative XRD Results of Clay Minerals Separated from the Samples Collected from 299-E24-21 (C3177)**


Sample Number	Mineral Phase (wt-%)				Normalization Factor
	Smectite	Illite	Chlorite	Kaolinite	
C3177-45	24	54	14	8	0.67
C3177-80.3	34	44	14	9	0.78
C3177-110	26	51	16	7	0.89
C3177-113.3	39	43	12	6	0.90
C3177-150	25	50	18	7	0.77
C3177-168.5	27	47	19	6	0.90
C3177-170.4	18	50	24	9	1.40
C3177-200	27	50	16	8	1.36
C3177-215	30	46	20	4	1.50
C3177-223.5	NA	NA	NA	NA	-
C3177-242.0	27	44	18	10	1.16
C3177-251	NA	NA	NA	NA	-
NA- not analyzed					

Total clay recoveries are within  $\pm 15\%$  of the “ideal” 100 % for samples C3177-110, C3177-113.3, C3177-168.5, and C3177-242.0. Most other samples have recoveries within 30 % of the “ideal” 100 %. Factors affecting the semi-quantification procedure (preparation and condition of the clay filter cake) were generally controlled and not thought to be significant. Quantitative analysis is considered good if errors amount to approximately 10 % of the amounts present for major constituents and approximately 20 % for minerals whose concentrations are less than 20 % (Moore and Reynolds 1989).



## 6.0 Seismic Data

Figure 6.1 shows the earthquake activity that has occurred since seismic monitoring began at Hanford in 1969. This map shows that no earthquakes have been recorded at the existing disposal site or the new IDF site. The closest earthquakes are of magnitude 2.0 or less. A comparison of the geologic map (Figure 2.1) and the earthquake map show that there are no earthquakes occurring on known geologic faults.

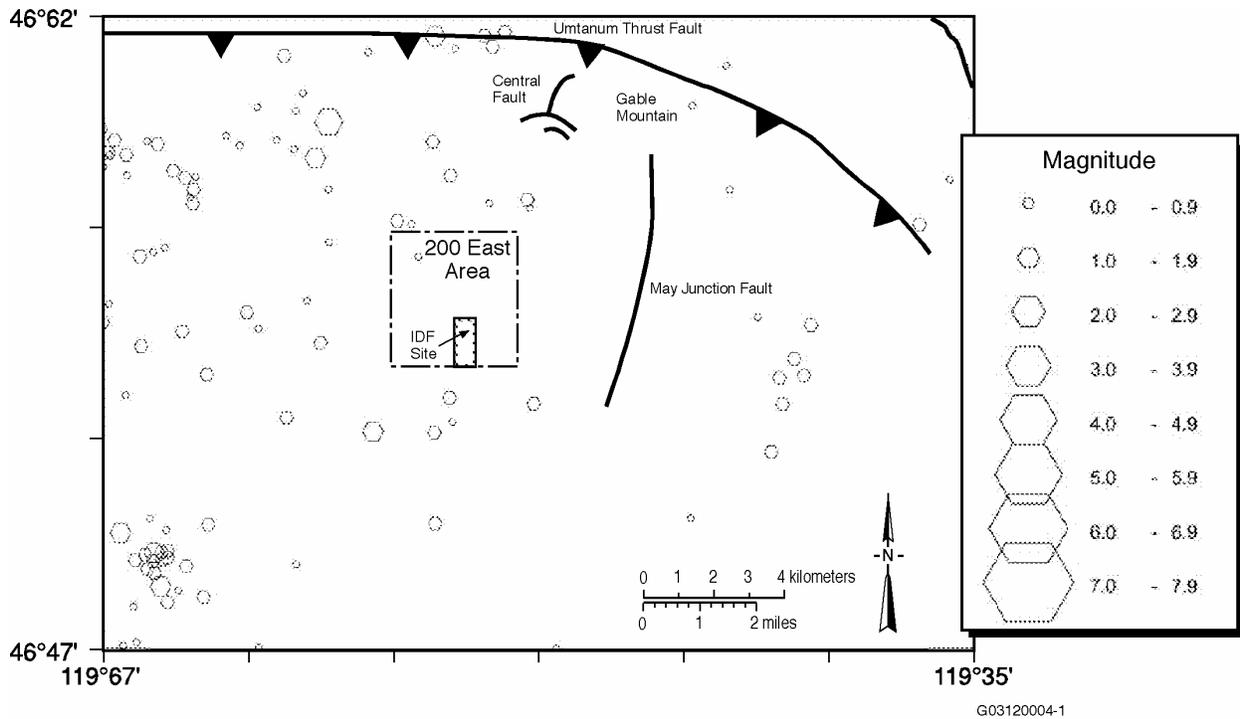

**Figure 6.1. Map Showing the Location of Earthquakes Detected Since 1969**

## 7.0 References

Birkeland PW, MN Machette, and KM Haller. 1991. *Soils as a tool for applied Quaternary Geology*. Utah Geological and Mineralogical Survey Miscellaneous Publication 91-3, Utah Department of Natural Resources.

Chamness MA and JK Merz. 1993. *Hanford wells*. PNL-8800, Pacific Northwest Laboratory, Richland, Washington.

Bjornstad BN, KR Fecht, and AM Tallman. 1987. *Quaternary stratigraphy of the Pasco Basin area south-central Washington*. RHO-BW-SA-563A. Rockwell Hanford Operations

Connelly et al. 1992. *Hydrogeologic model for the 200 East groundwater aggregate area*. WHC-SD-EN-TI-019, Westinghouse Hanford Company, Richland, Washington.

Delaney CD, KA Lindsey, and SP Reidel. 1991. *Geology and hydrology of the Hanford Site: A standardized text for use in Westinghouse Hanford Company documents and reports*. WHC-SD-ER-TI-003, Rev. 0, Westinghouse Hanford Company, Richland, Washington.

Fecht KR, SP Reidel, and AM Tallman. 1987. *Paleodrainage of the Columbia River System on the Columbia Plateau of Washington State: A Summary*. Washington Division of Geology and Earth Resources Bulletin 77, pp. 219-248.

Horton DG, HT Schaefer, RJ Serne, CF Brown, MM Valenta, TS Vickerman, IV Kutnyakov, SR Baum, KN Geiszler, and KE Parker. 2003. *Geochemistry of Borehole C3177 (299-E24-21) Samples*. Pacific Northwest National Laboratory Report PNNL-14289.

Khaleel R. 1999. Far-field hydrology data package for the immobilized low-activity tank waste performance assessment. HNF-4769, Rev. 0, Fluor Daniel Northwest.

Khaleel R. 2003. Data Package for the 2005 PA. In press.

Lindberg JW, JV Borghese, BN Bjornstad, and MP Connelly. 1993. *Geology and aquifer characteristics of the Grout Treatment Facility*. WHC-SD-EN-TI-071, Westinghouse Hanford Company, Richland, Washington.

Lindberg JW, BA Williams, and FA Spane. 1997. *Borehole data package for well 299-E37-47A, PUREX cribs*. PNNL-11515, Pacific Northwest National Laboratory, Richland, Washington.

Lindsey KA. 1991. *Revised stratigraphy for the Ringold Formation, Hanford Site, south-central Washington*. WHC-SD-EN-EE-004, Westinghouse Hanford Company, Richland, Washington.

Lindsey KA. 1992. *Geologic setting of the 200 East Area; an update*. WHC-SD-EN-TI-012, Rev. 0, Westinghouse Hanford Company, Richland, Washington.

- Lindsey KA. 1996. The Miocene to Pliocene Ringold Formation and associated deposits of the ancestral Columbia River system, south-central Washington and north-central Oregon. Washington Division of Geology and Earth Resources Open-file Report 96-8.
- Lindsey KA, SP Reidel, KR Fecht, JL Slate, AG Law, and AM Tallman. 1994. *Geohydrologic setting of the Hanford Site, south-central Washington*. in DA Swanson and RA Haugerud: Geologic Field Trips in the Pacific Northwest, 1994 Annual Meeting, Geological Society of America, v. 1, p. 1C-1-16.
- Mann FM, RJ Puigh, PD Rittmann, NW Kline, JA Voogd, Y Chen, CR Eiholzer, CT Kincaid, BP McGrail, AH Lu, GF Williamson, NR Grown, and PE LaMont. 1997. *Hanford immobilized low-activity tank waste performance assessment*. DOE/RL-97-69, U.S. Department of Energy.
- Mattigod SV, RJ Serne, RE Clayton, T Schaef, and D McCready. 2000. *Mineralogy of Selected Sediment Samples from Borehole 299-E17-21*. Letter Report to CH2MHILL Hanford Company.
- Mitchell RM (ed.). 1998. *TWRS Phase 1 privatization site preconstruction characterization report*. HNF-2067, Fluor Daniel Hanford, Inc., Richland, Washington.
- Moore DM and RC Reynolds. 1989. *X-Ray Diffraction and the Identification and Analysis of Clay Minerals*. Oxford University Press.
- Myers CW, et al. 1979. *Geologic Studies of the Columbia Plateau—A Status Report*, Rockwell Hanford Operations Report RHO-BWI-ST-4.
- Pluhar C. et al. 2003. Cosmogenic burial dating and magnetostratigraphy of early and mid-Pleistocene Missoula Flood sediments, Hanford, Washington. Geological Society of America Abstracts with Program, 86-12.
- Reidel SP, DG Horton, and KD Reynolds. 1998. *Immobilized low-activity waste site borehole 299-E17-21*. PNNL-11957, Pacific Northwest National Laboratory, Richland, Washington.
- Reidel SP and DG Horton. 1999. *Geologic Data Package for the 2001 Immobilized Low-Activity Waste performance Assessment*. Pacific Northwest National Laboratory report PNNL-12257, Rev. 1.
- Reidel SP and KR Fecht. 1994a. *Geologic map of the Richland 1:100,000 quadrangle, Washington*. Open File report 94-8, Washington State Department of Natural Resources, Olympia, Washington.
- Reidel SP and KR Fecht. 1994b. *Geologic map of the Priest Rapids 1:100,000 quadrangle, Washington*. Open File report 94-13, Washington State Department of Natural Resources, Olympia, Washington.
- Reidel SP, KA Lindsey, and KR Fecht. 1992. *Field trip guide to the Hanford Site*. WHC-MR-0391, Westinghouse Hanford Company, Richland, Washington.
- Rockhold ML, MJ Fayer, and PR Heller. 1993. Physical and hydraulic properties of sediments and engineered materials associated with grouted double-shell tank waste disposal at Hanford. PNL-8813, Pacific Northwest Laboratory, Richland, Washington.

Schramke JA. 1988. Characterization of 200 Area Soil Samples. Letter Report. September 29, 1988. Pacific Northwest National Laboratory, Richland, Washington.

Serne RJ et al. 2002. Characterization of Vadose Zone Sediment: Uncontaminated RCRA Borehole Core Samples and Composite Samples. PNNL-13757-1, Pacific Northwest National Laboratory, Richland, Washington.

Swanson LC. 1994. 1993 borehole completion data package, Grout Treatment Facility wells 299-E25-49, 299-E25-50 and 299-E25-1000. WHC-SD-EN-DP-058, Westinghouse Hanford Company, Richland, Washington.

Swanson LC. 1993. *Grout Treatment Facility borehole summary report for 1989 - 1993 update*. WHC-SD-EN-DP-070, Westinghouse Hanford Company, Richland, Washington.

Swanson LC. 1992. *Borehole completion data package for Grout Treatment Facility well 299-E25-39*. WHC-SD-EN-DP-048, Westinghouse Hanford Company, Richland, Washington.

Swanson LC, DC Weekes, SP Luttrell, RM Mitchell, DS Landeen, AR Johnson, and RC Roos. 1988. *Grout Treatment Facility environmental baseline and site characterization report*. WHC-EP-0150, Westinghouse Hanford Company, Richland, Washington.

Tallman AM, KR Fecht, MC Marratt, and GV Last. 1979. *Geology of the separations areas, Hanford Site, south-central Washington*. RHO-ST-23, Rockwell Hanford Operations, Richland, Washington.

Williams BA, BN Bjornstad, R Schakka, and WD Webber. 2000. *Revised Hydrogeology for the Suprabasalt Aquifer System, 200-East Area and Vicinity, Hanford Site, Washington*. Pacific Northwest National Laboratory report PNNL-12261.

U.S. Department of Energy (DOE). 1988. *Consultation draft site characterization plan. Reference repository location, Hanford Site, Washington*. DOE/RW-0164, U.S. Department of Energy, Office of Civilian Radioactive Waste Management, Washington, D.C.

U.S. Department of Energy (DOE), 2002. *Standardized Stratigraphic Nomenclature for Post-Ringold Formation Sediments within the Central Pasco Basin*. DOE/RL-2002-39. Rev. 0.

## **Appendix A**

### **Slug Test Characterization Results**

# Appendix A

## Slug Test Characterization Results


### Frank Spane

This report section provides the analytical results and description of slug tests conducted at five Integrated Disposal Facility Site (IDFS) monitor well locations. The location of the test wells surrounding the IDFS is shown in Figure A.1, and include: wells 299-E17-21, 299-E17-22, 299-E17-23, 299-E17-25, and 299-E24-21.

#### A.1 Test Method Description

Because of their ease of implementation and relatively short duration, slug tests are commonly used to provide initial estimates of hydraulic properties (e.g., range and spatial/vertical distribution of hydraulic conductivity, K). Because of the small displacement volumes employed during slug tests, hydraulic properties determined using this characterization method are representative of conditions relatively close to the well. For this reason, slug-test results are commonly used to design subsequent hydrologic tests having greater areas of investigation (e.g., slug interference [Novakowski 1989; Spane et al. 1996], constant-rate pumping tests [Butler 1990; Spane and Wurstner, 1993]). Results provided in Spane et al. (2001a, 2001b, and 2002) indicate a relatively close correspondence between reported hydraulic properties derived from slug test and pumping tests conducted at Hanford Site locations (i.e., estimate values generally within  $\pm 30\%$ ). As noted in Butler (1998), the close correspondence between slug and pumping test hydraulic property estimates indicates that the formation being tested can be represented as a homogeneous unit at the slug test or larger scale.

Slug tests conducted as part of the IDFS slug test characterization program were performed by removing a slugging rod (withdrawal test) of known displacement volume. Slug-withdrawal tests are preferred over slug-injection tests (i.e., by rapidly immersing the slugging rod), because of their reported superior results for unconfined aquifer tests, where the water table occurs within the well-screen section (e.g., Bouwer 1989). At one test site location, however, (well 299-E17-25) a number of slug injection tests were conducted as a means of test response comparison. At all test sites, two different size slugging rods were used to impart varying stress levels for individual slug tests. The slug tests were repeated at each stress level to assess reproducibility of the test results. Comparison of the normalized slug-test responses (i.e., for the two stress levels) is also useful assessing the effectiveness of well development and the presence of near-well heterogeneities and dynamic skin effects, as noted in Butler et al. (1996). Dynamic skin conditions refer to the non-repeatability of test responses conducted at a particular stress level. This non-repeatability of test response is commonly associated with changing formational conditions near the well due to incomplete well development activities. All IDFS wells tested, however, exhibited repeatable slug test response behavior indicating a stable or static formation condition surrounding each well, and suggests that the wells had been effectively developed prior to testing.

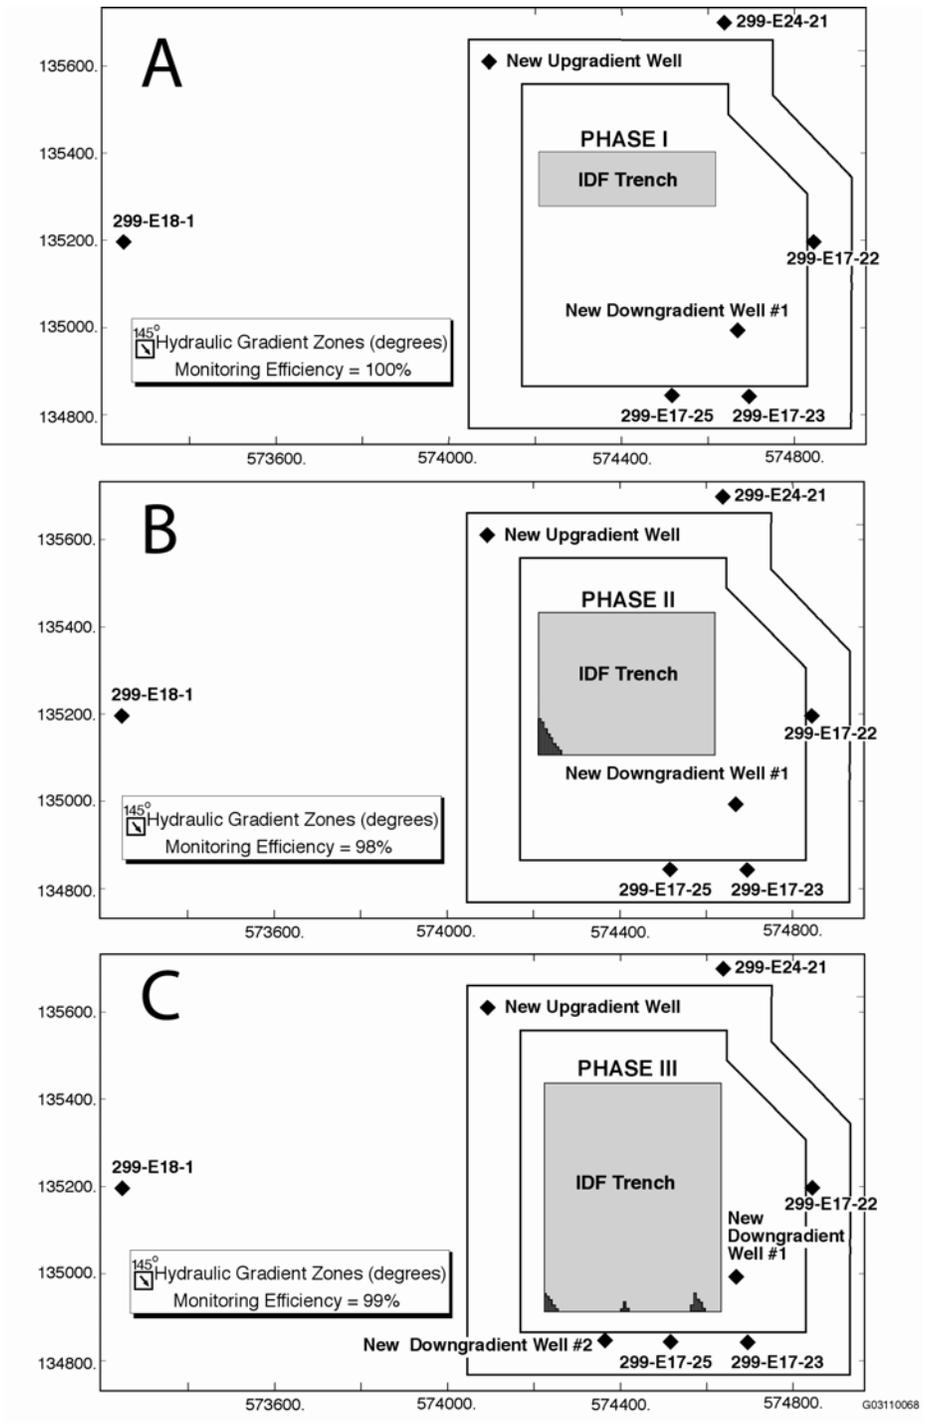


**Figure A.1. Location Map of Integrated Disposal Facility Site (IDFS) Monitoring Network Wells and Phases of Installation**

Based on volumetric relationships, the two different size slugging rods theoretically impart a slug-test stress level of 0.458 meter (low-stress tests) and 1.117 meters (high-stress tests) within a 0.102-meter inside diameter well. However, due to the relatively high aquifer permeability conditions that exist in the IDFS area and the fact that the slug tests could not be initiated in an *instantaneous* manner, the actual stress level imposed on the test formation were (in some cases) significantly lower than the theoretical stress level. This is due to the rapid and concurrent formation response during the time for slug test initiation (i.e., slugging rod removal  $\approx$  1 second). For these high-permeability test situations, the actual slug-test stress level is determined by projecting the observed early test response back to the time of test initiation (i.e., test time = 0).

### A.1.1 Test Response Characteristics

As shown in Figure A.2, water levels within wells can respond in one of three ways to the applied initial stress of the slug test. These response model patterns are: 1) an over-damped response, where the water levels recover in an exponentially decreasing recovery pattern; 2) an under-damped response, where the slug test response oscillates above and below the initial static, with decreasing peak amplitudes with time; and 3) critically damped, where the slug test behavior exhibits characteristics that are transitional between the over- and under-damped response patterns. Factors that control the type of slug test response model that is exhibited within a well include a number of aquifer properties (hydraulic conductivity, storativity) and well-dimension characteristics (well-screen length, well casing radius, well radius, aquifer thickness).

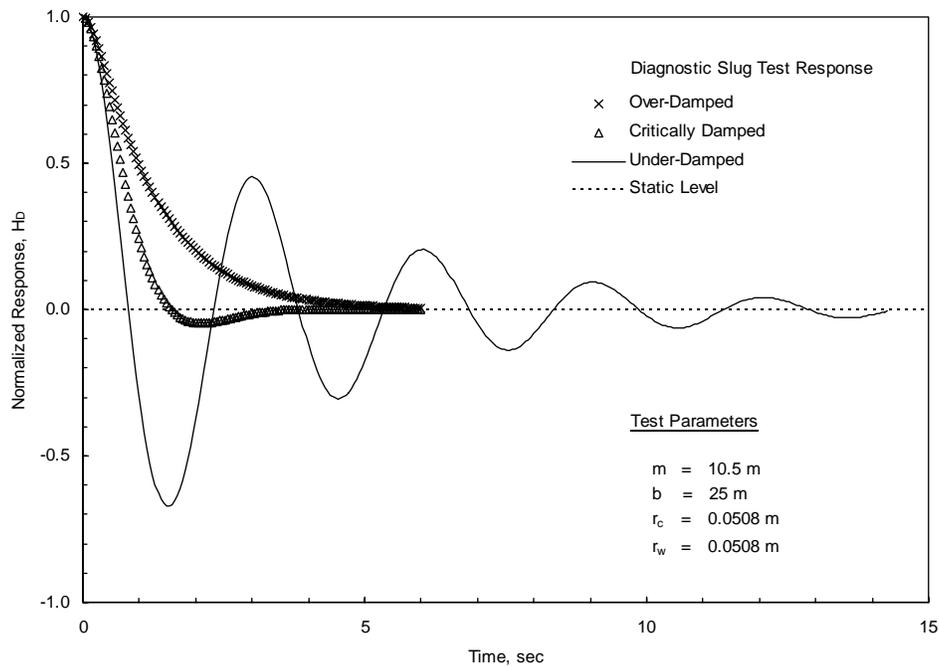

**Figure A.2. Diagnostic Slug Test Responses**

Over-damped test response behavior occurs within wells monitoring test formations of low to moderately high hydraulic conductivity (e.g.,  $K$  less than  $\sim 30$  m/d for  $L = 10$  m), and are indicative of test conditions where frictional forces (i.e., resistance of groundwater flow from the test interval to the well) are predominant over test system inertial forces. It is the most frequently displayed response pattern exhibited for wells tested on the Hanford Site, particularly for tests conducted within the 200-West Area. Standard methods used for the analysis of over-damped slug-tests include: the semi-empirical, straight-line analysis method described in Bouwer and Rice (1976) and Bouwer (1989), and the type-curve-matching method for unconfined aquifers presented in Butler (1998). A detailed description of these slug-test analysis methods, as they relate to unconfined aquifer tests conducted on the Hanford Site, is presented in Spane et al. (2001a, 2001b, 2002).

Under-damped test response patterns are exhibited within wells where inertial forces are predominant over formation frictional forces. This commonly occurs in wells with extremely long well fluid columns (i.e., large water mass within the well column) and/or within wells that penetrate highly permeable aquifers. As noted in Butler (1998), unconfined aquifer tests exhibiting under-damped behavior should be analyzed using the model presented in Springer and Gelhar (1991), which has been modified by Butler and Garnett (2000) to include partially penetrating well conditions. Tests exhibiting under-damped behavior should be conducted using very small stress level applications. If too high of a stress is applied, the slug test response will commonly exhibit oscillatory behavior superimposed on either an over- or critically damped recovery response. Methods are currently not available for the analysis of slug tests exhibiting this type of composite slug test response. For test sites exhibiting composite oscillatory behavior, the tests should be re-run at lower stress levels to allow analysis and quantitative hydraulic property determination using the appropriate, individual, analysis model method (under-, over-, or critically damped).

As mentioned previously, critically damped test responses are indicated by well water level responses that are transitional to the over- and under-damped test conditions, as shown in Figure A.2. They typically occur in wells that monitor test formations exhibiting high hydraulic conductivity. As noted in Butler (1998), distinguishing between over- and critically damped slug test response may be difficult in some cases (i.e., due to test signal noise) when examined on arithmetic plots. Proper model identification may be enhanced when semi-log plots are utilized, i.e., log head versus time. Critically damped slug tests exhibit a diagnostic concave-downward pattern when plotted in semi-log plot format. This is in contrast to over-damped response behavior, which displays either a linear or concave upward pattern. Appropriate methods that can be used to analyze critically damped slug tests are discussed in Butler (1998). A particularly useful spreadsheet method that is valid for the analysis of a variety of critically damped well/test response conditions is presented in Butler and Garnett (2000).

Table A.1 lists the diagnostic assessment of test response characteristics exhibited at the five IDFS monitor well test sites. As indicated in the table, all tests exhibited extremely rapid recovery times, and exhibited either over-damped or composite response model behavior. These diagnostic test response characteristics are indicative of test formations exhibiting high to very high permeability characteristics. Slug tests exhibiting these high permeability characteristics cannot be analyzed quantitatively using the Bouwer and Rice (1976) or type-curve methods, even if over-damped response patterns are exhibited (e.g., well 299-E24-21). Methods that can be employed for analyzing unconfined aquifer tests exhibiting

**Table A.1. Diagnostic Assessment of Slug-Test Response**

Test Well	Test Parameters					Comments
	Test Date	Test Response Recovery Time <sup>(a)</sup> , sec	Projected Stress Level <sup>(b)</sup> , m	Test Response Type <sup>(c)</sup>	Applied Analysis Method <sup>(d)</sup>	
299-E17-21	06/10/98	4.5	0.25	Composite: Under- and Over-Damped	High-K	Well-developed oscillatory characteristics exhibited in slug withdrawal recovery curve – particularly for low-stress tests
299-E17-22	07/31/02	5	0.04 - 0.05	Over-Damped	High-K	No oscillatory characteristics exhibited in slug withdrawal recovery curve
299-E17-23	08/01/02	5	0.04	Over-Damped	High-K	No oscillatory characteristics exhibited in slug withdrawal recovery curve
299-E17-25	08/05/02	3.5	0.28 - 0.38	Composite: Under- and Critically Damped	High-K	Minor oscillatory characteristics exhibited in slug withdrawal recovery curve; dominant oscillatory pattern exhibited for slug injection tests
299-E24-21	06/12/01	7.5	0.0366	Over-Damped	High-K	No oscillatory characteristics exhibited in slug withdrawal recovery curve
Note: For all test wells, $r_c = 0.051$ meter; $r_w = 0.110$ meter. (a) Time required for test recovery (i.e., within 0.001 m of pre-test static level). (b) Estimated applied stress-level for high-stress slug tests; note: theoretical applied stress = 1.117 m. (c) Diagnostic test response characteristics exhibited for slug withdrawal tests. (d) High-K analysis method presented in Butler and Garnett (2000) and Butler et al. (2003). Standard analytical methods include type-curve and Bouwer and Rice methods described in Spane et al. 2002.						

high permeability characteristics include, methods described in Springer and Gelhar (1991), Butler (1998), McElwee and Zenner (1998), Butler and Garnett (2000), Zurbuchen et al. (2002), and Butler et al. (2003). Because of the ease provided by a spreadsheet-based approach, the test analysis method presented in Butler and Garnett (2000) was used for the analysis of all IDFS tests, which exhibited high permeability response characteristics. Analysis results for individual test well sites are discussed in Section A.2.

## A.2 Test Results

Description and analytical results for slug tests conducted in IDFS monitor wells are provided in the following sections of the report. Table A.2 lists pertinent test and analysis results for the respective well sites. As indicated, test results for wells 299-E17-21 and 299-E24-21 were previously reported in Spane (1998) and Spane (2001), respectively. These test results, however, were analyzed using standard analytical methods, which are not appropriate for the analysis of high-permeability formations or tests not exhibiting over-damped test response. As was noted and recommended in Spane (1998), these slug test results should be reanalyzed when more appropriate analytical methods for analysis of slug tests exhibiting high permeability and/or critically damped behavior became readily available. Table A.2, then, lists the re-analysis of these two well sites, as well as the results for recently conducted slug tests at the other

**Table A.2. Slug-Test Analysis Results**


Test Well	Test Parameters			High-K <sup>(c)</sup> Type-Curve Analysis Method		Previously Reported Horizontal Hydraulic Conductivity, $K_h$ <sup>(d)</sup> (m/day)
	Test Date	Aquifer Thickness <sup>(a)</sup> (m)	Test Interval Saturated Thickness (m)	Horizontal Hydraulic Conductivity, $K_h$ <sup>(b)</sup> (m/day)	Damping Factor, $C_D$	
299-E17-21	06/10/98	13.3	7.83	40.3 - 45.7 ( $\geq 43$ )	3.0 - 5.0	69
299-E17-22	07/31/02	25	10.41	27.3 - 30.0 ( $\geq 29$ )	2.75 - 2.90	-
299-E17-23	08/01/02	25	10.63	23.0 - 23.9 ( $\geq 24$ )	2.50 - 3.75	-
299-E17-25	08/05/02	25	10.15	38.2 - 51.1 ( $\geq 45$ )	1.30 - 1.33	-
299-E24-21	06/12/01	25	6.1	39.9 ( $\geq 40$ )	10.0	75

Note: For all test wells,  $r_c = 0.051$  meter;  $r_w = 0.110$  meter.  
Number in parentheses is best estimate value for the test interval.  
(a) Determined, in most cases, from projection from neighboring wells.  
(b) Assumed to be uniform within the well-screen test section.  
(c) Results based on High-K analysis method presented in Butler and Garnett (2000) and Butler et al. (2003).  
(d) Previously reported values based on standard slug test analysis methods (i.e., type-curve and Bouwer and Rice methods as discussed in Spane et al., 2002), which are not valid for tests exhibiting High-K conditions

three IDFS monitor well sites using the High-K analysis method described in Butler and Garnett (2000) and Butler et al. (2003), which is appropriate for high permeability tests exhibiting either over-, under- or critically damped response behavior.

**A.2.1 Well 299-E17-21**

A total of seven slug withdrawal tests (three high and four low stress) were conducted on June 10, 1998. Very rapid recoveries (~99% recovery within ~4.5 seconds) were exhibited for all tests, and are indicative of extremely high permeability conditions (Table A.1). A comparison of the normalized, low- and high-stress slug-test responses indicates essentially identical behavior, which suggests that the well had been fully developed. Examination of the individual slug-test responses also indicates a high permeability, nonlinear-inertial slug test response. Of particular note, is the well-defined oscillatory pattern exhibited in Figure A.3, which is superimposed on the general, rapid, slug withdrawal recovery pattern (particularly on low-stress tests). As noted previously, such a superimposed pattern is indicative of a composite model response pattern (i.e., under-damped on over-damped). This composite pattern is attributed to the application of too high of a stress level to initiate the test. The existence of composite response behavior was not recognized at the time of testing; and consequently, no subsequent slug tests were performed at lower stress levels that would insure single-model response behavior. As noted previously, such tests exhibiting composite response patterns are not currently analyzable with available analytical methods. In an attempt to provide a qualitative hydraulic conductivity estimate for the test, a High-K over-damped response curve was fit through the test response data, projecting approximately through the mid-points of the data exhibiting oscillatory behavior. This is similar to the filtering analysis

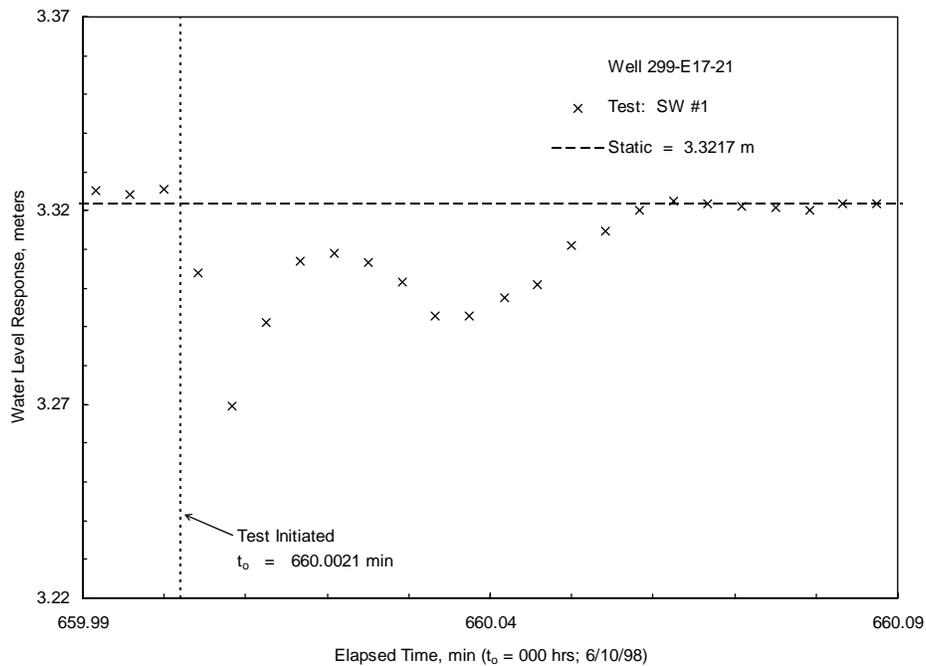


**Figure A.3. Test Response For Well 299-E17-21 Showing Oscillatory Response Superimposed on Over-Damped Slug Withdrawal Test Recovery**

approach taken by Giffin and Ward (1989) for analyzing pumping test pumping test data exhibiting similar early-time oscillatory responses that are superimposed on a general recovery water-level buildup pattern. Figure A.4 shows an analysis plot for a selected high-stress test for this well.

As noted previously, such a superimposed pattern is indicative of a composite model response pattern (i.e., under-damped on over-damped). This composite pattern is attributed to the application of too high of a stress level to initiate the test. The existence of composite response behavior was not recognized at the time of testing; and consequently, no subsequent slug tests were performed at lower stress levels that would insure single-model response behavior. As noted previously, such tests exhibiting composite response patterns are not currently analyzable with available analytical methods. In an attempt to provide a qualitative hydraulic conductivity estimate for the test, a High-K over-damped response curve was fit through the test response data, projecting approximately through the mid-points of the data exhibiting oscillatory behavior. This is similar to the filtering analysis approach taken by Giffin and Ward (1989) for analyzing pumping test pumping test data exhibiting similar early-time oscillatory responses that are superimposed on a general recovery water-level buildup pattern. Figure A.4 shows an analysis plot for a selected high-stress test for this well.

As indicated Table A.2, hydraulic conductivity estimates ranged between 40.3 and 45.7 m/day for all tests using this approximate analytical approach. Because of the qualitative nature of the analysis method utilized (i.e., using a single response model to analyzed a test exhibiting composite model behavior), a best estimate value of  $\geq 43$  m/day (based on the average for high- and low-stress tests) can only be

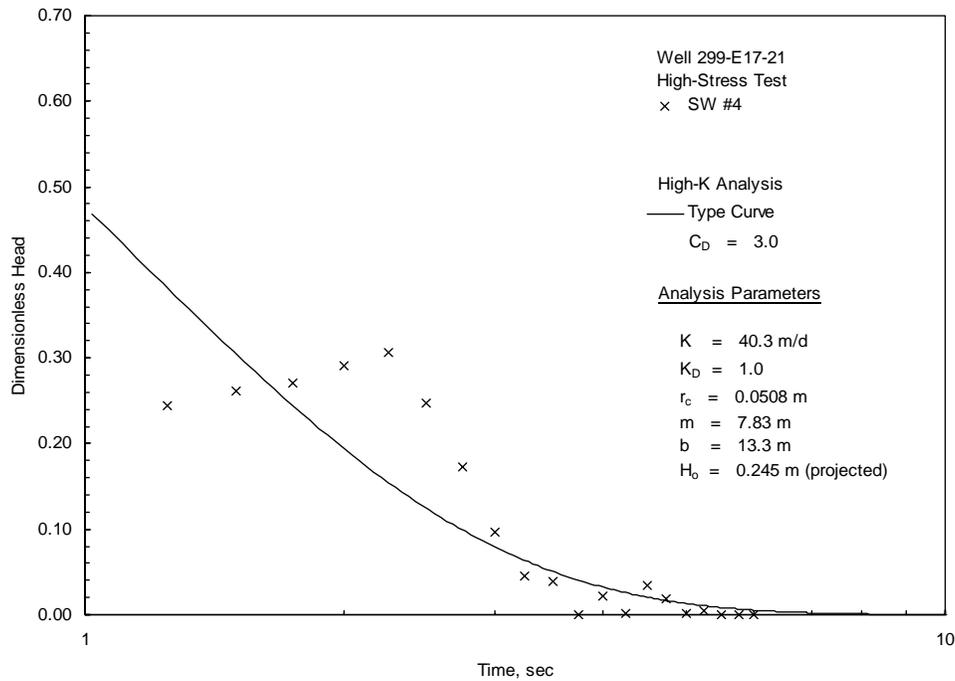


**Figure A.4. High-K Slug Withdrawal Test Analysis Plot for Well 299-E17-21**

specified at this time for the test formation monitored at this site. A more quantitative estimate can be obtained for this well location by conducting additional low-level stress tests, and incorporating the test suggestions presented in Section A.3 of this report. For comparison purposes, Table A.2 also shows that a higher estimate for hydraulic conductivity of 69 m/day was reported earlier in Spane (1998) for the slug tests performed at this site. As previously discussed, however, this earlier results was determined based on analytical methods not appropriate for high permeability formation conditions.

### A.2.2 Well 299-E17-22

A total of five slug withdrawal tests (three high and two low stress) were conducted on July 31, 2002. Very rapid recoveries (~99% recovery within ~5 seconds) were exhibited for all tests, and are indicative of extremely high permeability, over-damped conditions (Table A.1). A comparison of the normalized high-stress slug-test responses indicates essentially identical behavior, which suggests that the well had been fully developed. Due to the relatively small test responses exhibited for low-stress test results, only test data obtained for high-stress tests were subjected to quantitative analysis. Because the high-stress test responses were nearly identical, analysis results would be expected to be quite comparable. Figure A.5 shows the results of a selected high-stress slug test analysis. As indicated in Table A.2, hydraulic conductivity estimates ranged between 27.3 and 30.0 m/day for all high-stress tests using the High-K analysis method. Because of the extremely rapid recovery response and low projected stress levels (0.04 to 0.05 m; Table A.1), a best estimate value of  $\geq 29 \text{ m/day}$  (based on the average for high-stress tests) can only be specified at this time for the test interval monitored at this site. A more quantitative estimate

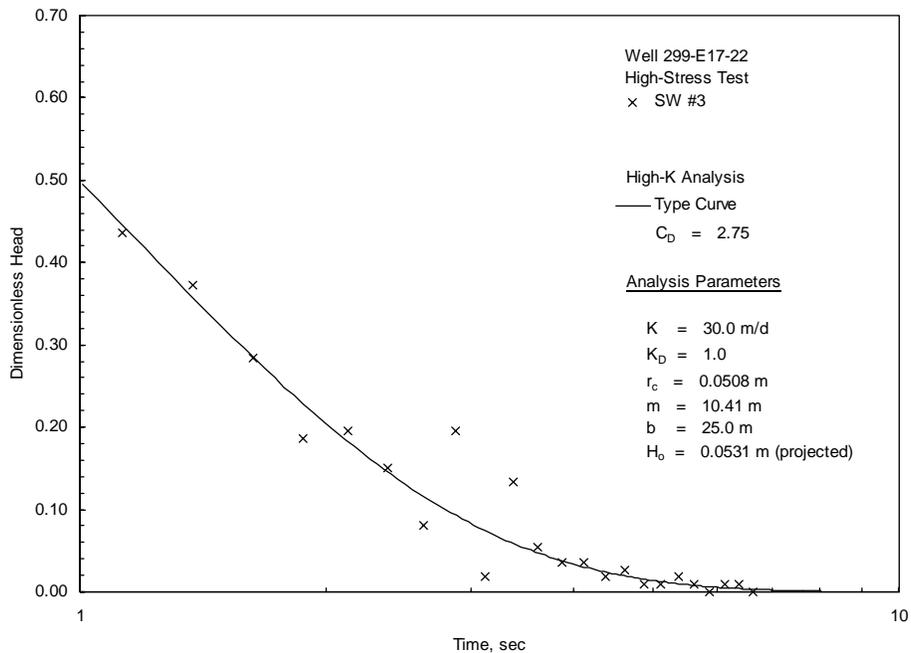


**Figure A.5. High-K Slug Withdrawal Test Analysis Plot for Well 299-E17-22**

might be obtained for this well location by conducting additional stress tests that incorporate test suggestions presented in Section A.3 of this report.

### A.2.3 Well 299-E17-23


A total of five slug withdrawal tests (three high and two low stress) were conducted on August 1, 2002. Very rapid recoveries (~99% recovery within ~5 seconds) were exhibited for all tests, and are indicative of extremely high permeability, over-damped conditions (Table A.1). A comparison of the normalized high-stress slug-test responses indicates essentially identical behavior, which suggests that the well had been fully developed. Due to the relatively small test responses exhibited for low-stress test results, only test data obtained for high-stress tests were subjected to quantitative analysis. Because the high-stress test responses were nearly identical, analysis results would be expected to be quite comparable. Figure A.6 shows the results of a selected high-stress slug test analysis. As indicated in Table A.2, hydraulic conductivity estimates ranged between 23.0 and 23.9 m/day for all high-stress tests using the High-K analysis method. Because of the extremely rapid recovery response, low projected stress levels (0.04 m; Table A.1), and scatter in test data, a best estimate value of  $\geq 24$  m/day (based on the average for high-stress tests) can only be specified at this time for the test formation monitored at this site. A more quantitative estimate might be obtained for this well location by conducting additional stress tests that incorporate test suggestions presented in Section A.3 of this report.

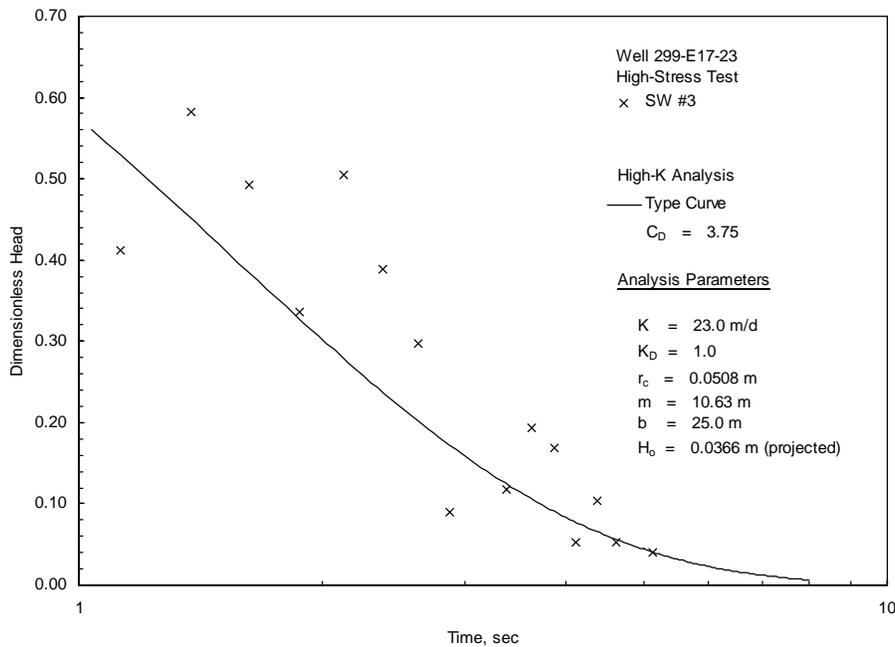

**Figure A.6. High-K Slug Withdrawal Test Analysis Plot for Well 299-E17-23**

#### A.2.4 Well 299-E17-25

A total of five slug withdrawal tests (three high and two low stress) were conducted on August 5, 2002. Very rapid recoveries (~99% recovery within ~3.5 seconds) were exhibited for all tests, and are indicative of extremely high permeability, critically damped conditions (Table A.1). A comparison of the normalized high-stress slug-test responses indicates essentially identical behavior, which suggests that the well had been fully developed. Of particular note, is a consistent, over-recovery of water-levels during the early stages of the test (i.e., beyond the pre-test static water level), which then recovers back to equilibrium conditions. Test responses exhibiting this type of pattern are indicative of critically-damped test behavior as shown in Figure A.2. In addition, to these tests, three slug injection tests were conducted for comparing test response behavior. The slug injection tests exhibited an oscillatory, under-damped slug test response as shown in Figure A.7. The reason for the change in response behavior (i.e., from critically damped to under-damped), is due the presence of the slugging rod, which effectively changes the inside well casing radius (i.e., where the water-level response occurs). As discussed in Section A.3, decreasing the well casing radius,  $r_c$ , lowers the well-response damping factor,  $C_D$ , which can cause a shift in test behavior from over-damped to → critically damped or to → under-damped behavior. Unfortunately, the slug injection oscillatory tests can not be analyzed using standard, High-K underdamped, analytical methods. This is due to the fact that the effectively reduced well casing radius occurs in only part of the well-screen section (i.e., slugging rod is ~ 1.8 m). As a result, the oscillatory test response occurred in well-screen sections of varying radius (i.e., early peaks within the open well casing, with the oscillatory troughs occurring within the annular area surrounding the slugging rod and well casing).

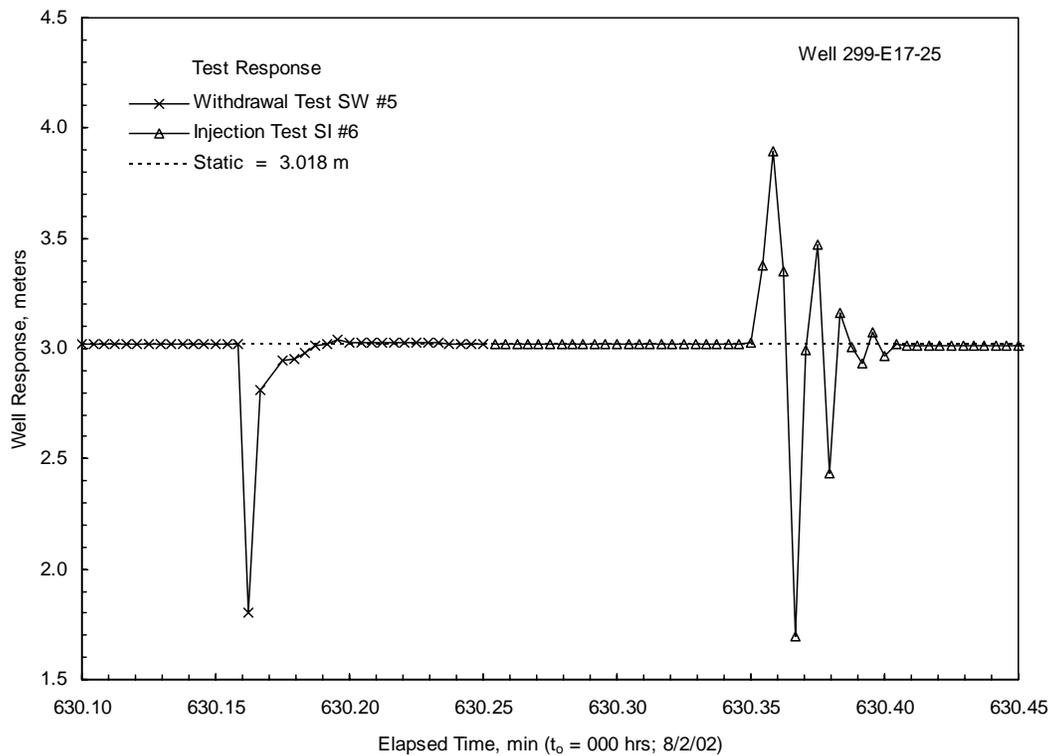


**Figure A.7. Test Response For Well 299-E17-25 Showing Over-Damped Slug Withdrawal Test Response and Oscillatory, Under-Damped Slug Injection Test Response**

Because of the difficulties presented with analyzing the slug injection oscillatory response, analysis efforts for this test well focused on analyzing the critically damped slug withdrawal tests. Due to the relatively small test responses exhibited for low-stress test results, only test data obtained for high-stress tests were subjected to quantitative analysis. Figure A.8 shows the results of a selected high-stress slug test analysis. As indicated in Table A.2, hydraulic conductivity estimates ranged between 38.2 and 51.1 m/day for all high-stress tests using the High-K analysis method. Because of the extremely rapid recovery response, a best estimate value of  $\geq 45$  m/day (based on the average for high-stress tests) can only be specified at this time for the test formation monitored at this site. A more quantitative estimate might be obtained for this well location by conducting additional stress tests that incorporate test suggestions presented in Section A.3 of this report.

### A.2.5 Well 299-E24-21

A total of five slug withdrawal tests (three high and two low stress) were conducted on June 12, 2001. Very rapid recoveries (~99% recovery within ~7.5 seconds) were exhibited for all tests, and are indicative of extremely high permeability, over-damped conditions (Table A.1). A comparison of the normalized high-stress slug-test responses indicates essentially identical behavior, which suggests that the well had been fully developed. Due to the relatively small test responses exhibited for low-stress test results, only test data obtained for high-stress tests were subjected to quantitative analysis. To facilitate the analysis

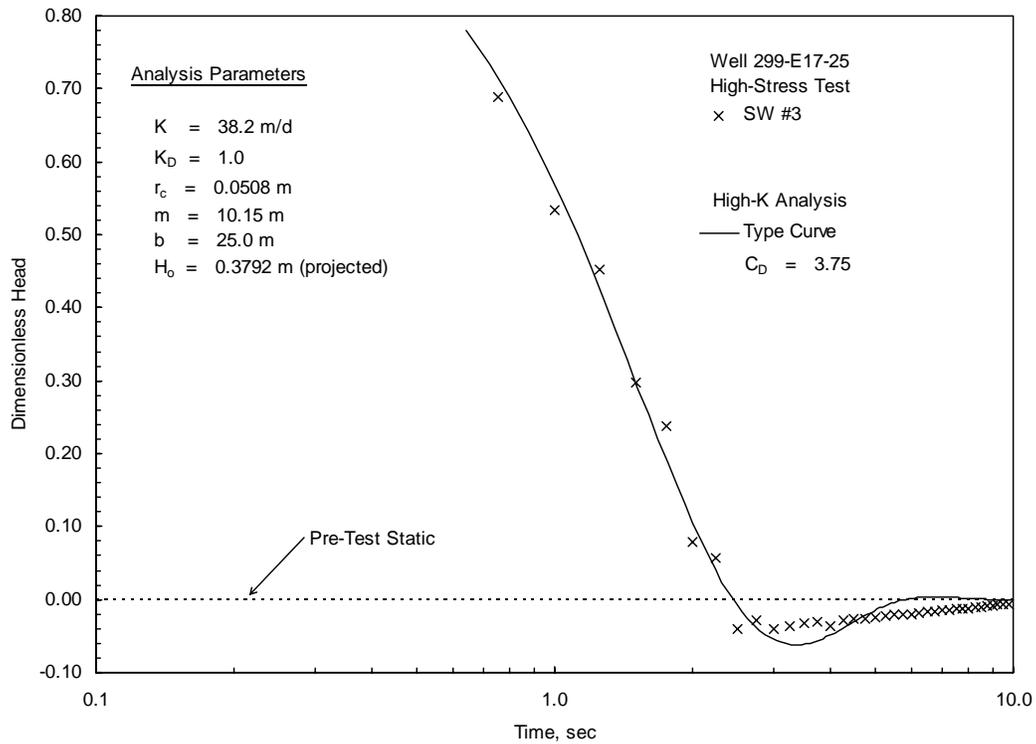


**Figure A.8. High-K Slug Withdrawal Test Analysis Plot for Well 299-E17-25**

process, selected high-stress test responses were combined. Figure A.9 shows the results of a composite analysis of three combined high-stress tests. Because of the additional test data available from the combined tests, the analysis plot shows a composite dimensionless head and head derivative plot, which is commonly employed in standard, type-curve analysis of lower permeability slug tests exhibiting over-damped behavior (e.g., Spane et al. 2001a, 2001b, 2002). As indicated in the analysis figure, the type curve and derivative plot match yielded a hydraulic conductivity estimate of 39.9 m/day for the combined high-stress tests using the High-K analysis method. Because of the exhibited rapid recovery response and low projected stress levels (0.04 m; Table A.1), a best estimate value of  $\geq 40$  m/day can only be specified at this time for the test formation monitored at this site. A more quantitative estimate might be obtained for this well location by conducting additional stress tests that incorporate test suggestions presented in Section A.3 of this report.

### A.3 Test Recommendations

Results from analysis of slug tests conducted at five IDFS monitor wells indicates high permeability conditions, with best estimate hydraulic conductivity ranging from  $\geq 24$  m/day to  $\geq 45$  m/day. There is a degree of uncertainty to these calculated hydraulic properties, however due to:

- an upper-K characterization limit for slug tests exhibiting over-damped slug test response behavior (at three well sites)

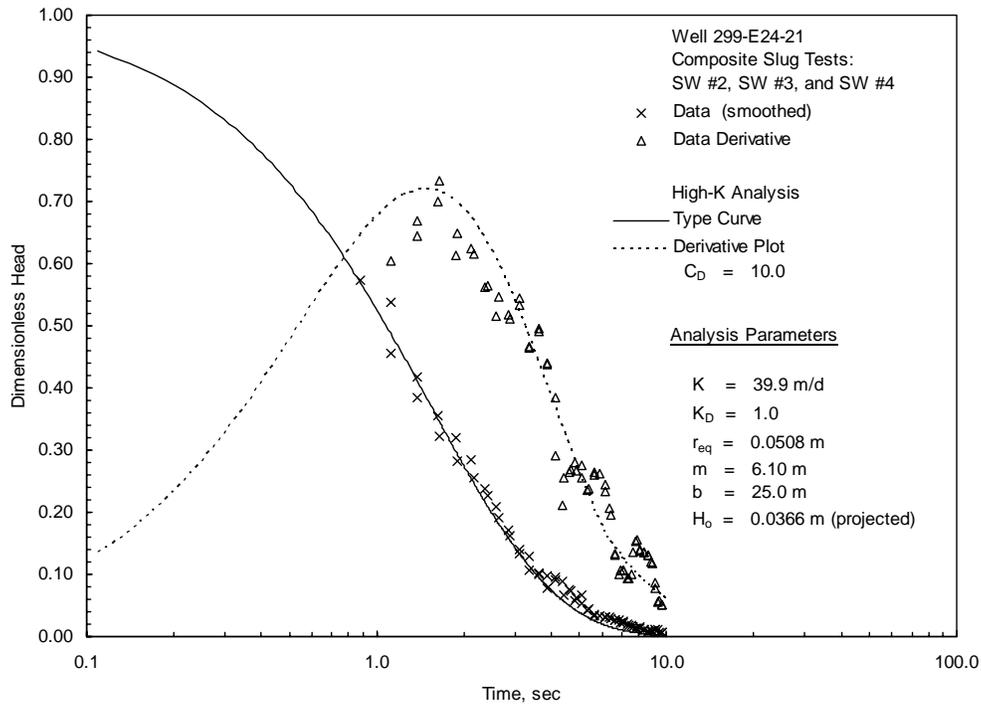

**Figure A.9. High-K Composite Slug Withdrawal Test Analysis Plot for Well 299-E24-21**

- rapid test response recoveries (from  $\leq 3.5$  to  $\leq 7.5$  secs)
- extremely low projected stress levels (three well sites  $\leq 0.05$  m)
- composite model response behavior (at two well sites)

High permeability well sites exhibiting over-damped or composite model response behavior is particularly limiting in the ability to define hydraulic properties greater than  $\sim 30$  m/day (i.e., for a test interval section,  $L$ , of  $\sim 10$  m). The ability to characterize test intervals having significantly higher hydraulic properties could be enhanced by manipulating the well test to ensure oscillatory, under-damped behavior. Well-test response behavior can be manipulated by adjusting one of the parameters controlling the response damping parameter,  $C_D$ , which Butler (1998) reports for unconfined aquifer tests as:

$$C_D = (g/L_e)^{1/2} r_c^2 \ln(R_e/r_w)/(2 K m) \quad (\text{A.1})$$

where

- $g$  = acceleration due to gravity
- $L_e$  = effective well water-column length
- $r_c$  = well casing radius; i.e., radius of well water-column that is active during testing
- $R_e$  = effective test radius parameter; as defined by Bouwer and Rice (1976)
- $r_w$  = well radius
- $K$  = hydraulic conductivity of test interval
- $m$  = well-screen length.

Of the equation parameters, the well casing radius,  $r_c$ , is one parameter that can be modified relatively easily, and because it is a squared term, reductions in well casing radius can have a significant effect on  $C_D$ , and subsequent well response behavior. Figure A.10 illustrates the predicted well response behavior for a standard 4-inch diameter well exhibiting over-damped response behavior (base case), and predicted oscillatory, under-damped slug test responses for various reduced  $r_c$  well radii. As indicated, increased oscillatory behavior is produced by decreasing the  $r_c$  well dimension parameter. Also shown, is that the ability to resolve the hydraulic conductivity is significantly improved (i.e., in contrast with the over-damped response) when oscillatory, under-damped test conditions are produced by decreasing  $r_c$ . An effective reduction in  $r_c$  can be realized a number of ways, but perhaps most simply by using a slugging rod that exceeds the well screen length,  $L$ . The produced oscillatory response using a slugging rod to effectively reduce the existing well-casing radius was demonstrated by the slug injection test response exhibited for well 299-W17-25, as shown in Figure A.7. To facilitate ease of test analysis, however, the manipulated under-damped test response should occur solely within the reduced well-casing radius section, preferably extending across the entire well-screen length.

Figure A.11 illustrates the ability to extend the range for hydraulic conductivity characterization of a test interval, if the  $r_c$  is reduced from 4-inches to 1.25 inches (for the same test conditions specified in Figure A.10). As indicated, hydraulic conductivity characterization limits can be readily *extended by a factor of 3* or more by reducing  $r_c$ , to produce oscillatory test behavior within the well (i.e., for this


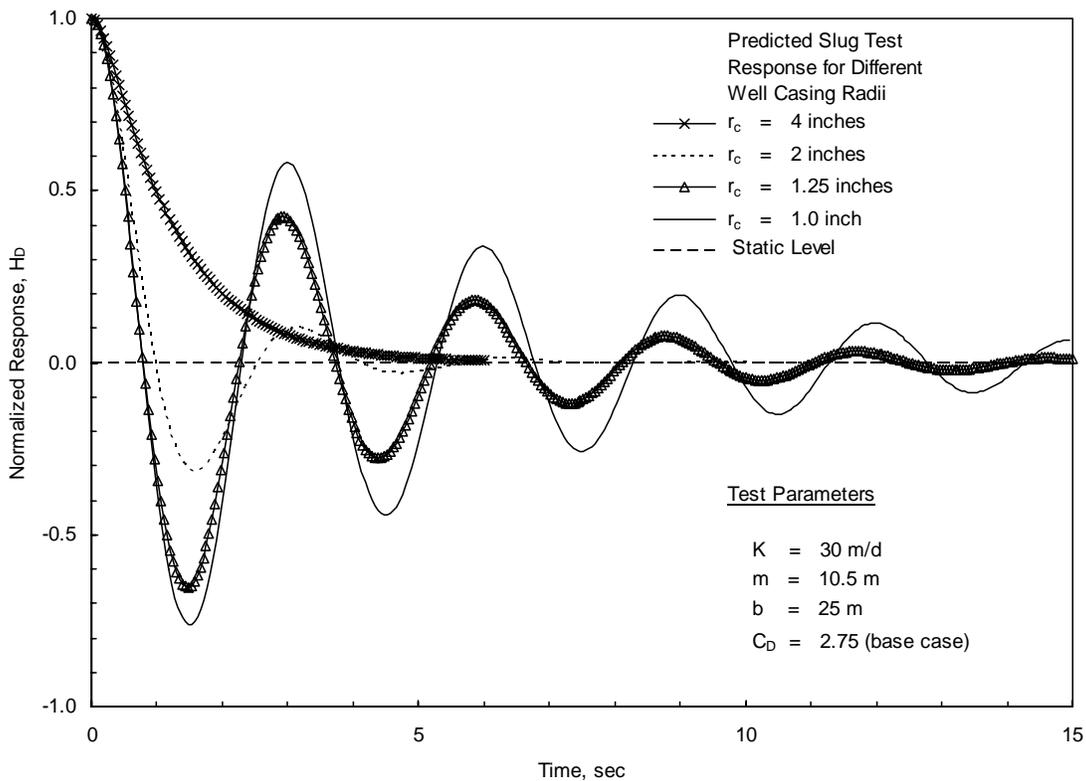


Figure A.10. Predicted Slug Test Response, As a Function of Varying Well Casing Radius,  $r_c$

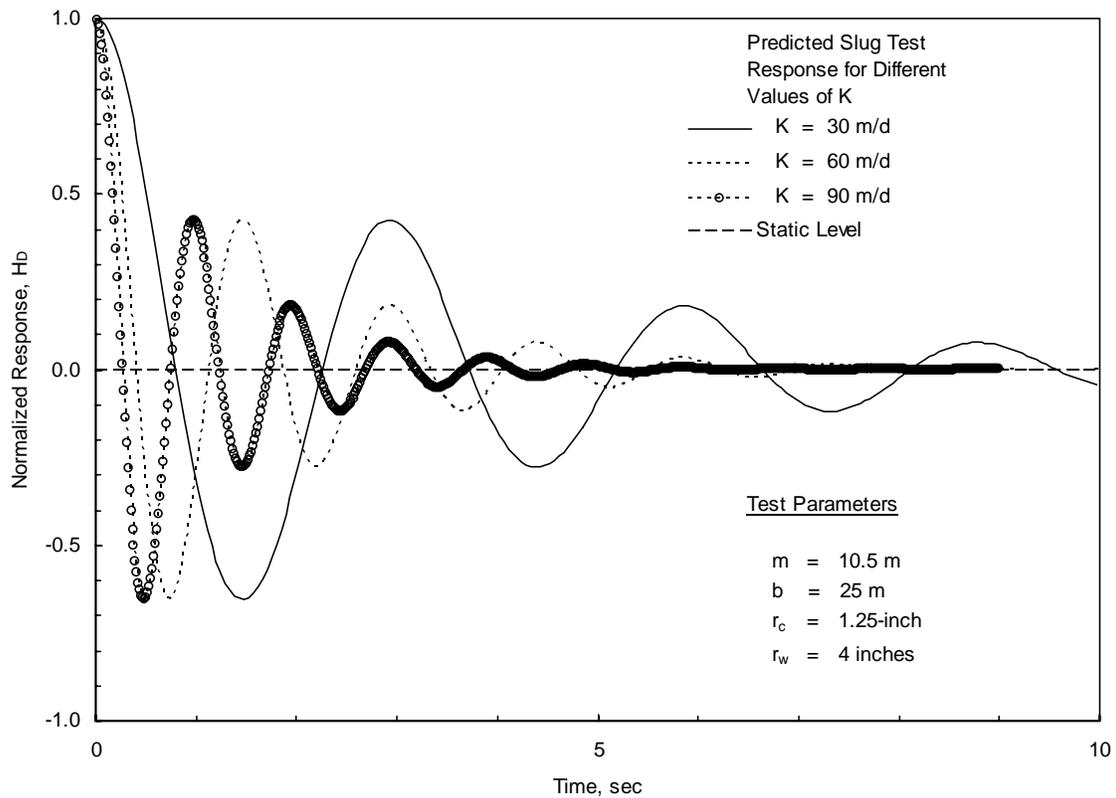

**Figure A.11. Predicted Slug Test Response, As a Function of Varying Test Interval Hydraulic Conductivity, K**

example: over-damped characterization limit,  $K \sim 30$  m/day; for under-damped response,  $K \geq 90$  m/day). Lower and higher characterization levels may be realized by increasing and decreasing  $r_c$ , well dimension, respectively.

In addition to modifying  $r_c$  to enhance and extend slug test analysis characterization for high-permeability formations, several other recommendations can be implemented to improve the quality of test results. For well/aquifer systems exhibiting under-damped or composite model response behavior, tests should be conducted with very low stress levels to insure linear response behavior (i.e., non-turbulent, Darcian flow conditions). The appropriate lower stress level is indicated when normalized test response behavior for tests with different applied stress levels, are equivalent.

For improving the *instantaneous* application of stress for slug tests, pneumatic stress applications (rather than using slugging rod methods) should be considered, as discussed in Spane et al. (1996) and Butler (1998). For test well situations where the water table is within the well-screen section, this requires the use of highly elastic sealing equipment (e.g., packer system) to isolate the water table from the well water column. The equipment sealing length would also have to extend below anticipated slug stress levels for initiated tests.

## A.4 References

- Bouwer H. 1989. "The Bouwer and Rice slug test – an update." *Ground Water* 27(3):304-309.
- Bouwer H and RC Rice. 1976. "A slug test for determining hydraulic conductivity of unconfined aquifers with completely or partially penetrating wells." *Water Resources Research* 12(3):423-428.
- Butler JJ, Jr. 1990. "The role of pumping tests in site characterization: some theoretical considerations." *Ground Water* 28(3):394-402.
- Butler JJ, Jr. 1996. "Slug tests in site characterization: some practical considerations." *Environmental Geosciences* 3(3):154-163.
- Butler JJ, Jr. 1998. *The design, performance, and analysis of slug tests*. Lewis Publishers, CRC Press, Boca Raton, Florida.
- Butler, JJ, Jr., GC Bohling, ZH Hyder, and CD McElwee. 1994. "The use of slug tests to describe vertical variations in hydraulic conductivity." *Journal of Hydrology* 156:137-162.
- Butler, JJ, Jr. and EJ Garnett. 2000. *Simple procedures for analysis of slug tests in formations of high hydraulic conductivity using spreadsheet and Scientific Graphics Software*. Open-file Report 2000-40, Kansas Geological Survey, Lawrence, Kansas.
- Butler, JJ, Jr., EJ Garnett, and JM Healey. 2003. "Analysis of slug tests in formations of high hydraulic conductivity." *Ground Water* 41(5):620-630.
- Butler JJ, CD McElwee, and W Liu. 1996. "Improving the quality of parameter estimates obtained from slug tests." *Ground Water* 34(3):480-490.
- Giffen DA and DS Ward. 1989. *Analysis of early-time oscillatory aquifer response*. In Proceedings of: "New Field Techniques for Quantifying the Physical and Chemical Properties of Heterogeneous Aquifers", National Water Well Association, Dallas, Texas, March 20-23, 1989.
- McElwee CD and MA Zenner. 1998. "A nonlinear model for analysis of slug-test data." *Water Resources Research* 34(1):55-66.
- Novakowski KS. 1989. "Analysis of pulse interference tests." *Water Resources Research* 25(11):2377-2387.
- Spane FA, Jr. and SK Wurstner. 1993. "DERIV: A program for calculating pressure derivatives for use in hydraulic test analysis." *Ground Water* 31(5):814-822.
- Spane FA, Jr., PD Thorne, and LC Swanson. 1996. "Applicability of slug interference tests for hydraulic characterization of unconfined aquifer: (2) Field test examples." *Ground Water* 34(5):925-933.

Spane F. 1998. "Slug Test Analysis Results for Well 299-E17-21"; published as Appendix A in Reidel, S.P., K.D. Reynolds, and D.G. Horton; *Immobilized Low-Activity Waste Site Borehole 299-E17-21*; PNNL-11957, Pacific Northwest National Laboratory, Richland, Washington.

Spane FA, Jr. and PD Thorne. 2000. *Analysis of the hydrologic response associated with shutdown and restart of the 200-ZP-1 pump-and-treat system*. PNNL-13342, Pacific Northwest National Laboratory, Richland, Washington.

Spane FA. 2001. "Results of Aquifer Testing in Borehole 299-E24-21"; published as Appendix A in Reidel, S.P., D.G. Horton, and M.M. Valenta; *Geologic and Wireline Borehole Summary from the Second ILAW Borehole (299-E24-21)*; PNNL-13652, Pacific Northwest National Laboratory, Richland, Washington.

Spane FA, Jr., PD Thorne, and DR Newcomer. 2001a. *Results of detailed hydrologic characterization tests – fiscal year 1999*. PNNL-13378, Pacific Northwest National Laboratory, Richland, Washington.

Spane FA, Jr., PD Thorne, and DR Newcomer. 2001b. *Results of detailed hydrologic characterization tests – fiscal year 2000*. PNNL-13514, Pacific Northwest National Laboratory, Richland, Washington.

Spane FA, Jr., PD Thorne, and DR Newcomer. 2002. *Results of detailed hydrologic characterization tests – fiscal year 2001*. PNNL-14113, Pacific Northwest National Laboratory, Richland, Washington.

Springer RK and LW Gelhar. 1991. "Characterization of large-scale aquifer heterogeneity in glacial outwash by analysis of slug tests with oscillatory response, Cape Cod, Massachusetts." In *U.S. Geological Survey Water Resources Investigations*. Report 91-4034:36-40.

Zurbuchen BR, VA Zlotnik, and JJ Butler, Jr. 2002. "Dynamic interpretation of slug tests in highly permeable aquifers." *Water Resources Research* 38(3), 7:1-18.

## **Appendix B**

### **Descriptions of Core Collected from Boreholes at the IDF Site**

## Appendix B

### Descriptions of Core Collected from Boreholes at the IDF Site

**Table B.1. Summary Description of Core from Borehole 299-E17-21 (Reidel et al. 1998)**

Core Number	Polarity (Reidel and Horton, 1999)	Core Interval (feet)	Description
01A	ND	0 – 2.0	0.0 – 0.6 Pad construction fill. 0.6 – 2.0 Medium- to fine-grained sand; 60% basalt, 40% felsic.
		3.0 – 5.0	No recovery.
02C	ND	9.6 – 11.6	9.6 – 11.6 Very fine- to coarse-grained sand; 1% pebbles up to 0.5 inch.
02B	ND	11.6 – 12.8	11.6 - 12.6 Coarse- to very coarse-grained basaltic sand; 1-2% subrounded pebbles up to 1 inch in diameter; some bedding present.
02A	ND	12.8 – 14.6	12.8 - 12.9 Fine-grained sand with silt. 12.9 - 14.2 Medium- to coarse-grained sand; 70% basalt, 30% felsic. 14.2 - 14.6 Finely bedded medium- to fine-grained sand up to 20%. 14.3 - 14.6 Silt; fine scale bedding.
		15.0 – 18.5	No recovery.
03B	ND	18.7 – 19.7	18.7 - 19.5 Medium sand; 60% basalt, 40% felsic; sparse 0.5 inch diameter pebbles. 19.5 – 19.7 Brown, fine-grained sand with minor silt.
03A	ND	19.7 – 21.7	19.7 – 19.8 Fine-grained sand. 19.8 – 20.0 Brown, silty sand with 5-10% silt. 20.0 – 20.9 Medium-grained sand; 60% basalt; 40% felsic; rare mica. 20.9 – 21.1 Very fine-grained sand with silt; sharp upper contact. 21.1 Silty, fine-grained sand, slightly moist; 50% basalt, 50% felsic. 21.5 Coarse-grained sand; 50% basalt; 50% felsic; minor pebbles. 21.5 – 21.7 Gravely, coarse-grained sand.
		22.0 – 24.0	No recovery.
04B	ND	28.1 – 28.5	Coarse-grained sand with minor gravel; 50-60% basalt; 40-50% felsic.
04A	ND	28.5 – 30.5	Slightly silty fine- to medium-grained sand; minor gravels up to 1 inch in diameter; grain size decreases slightly downward.
	ND	30.5 – 31.6	No recovery.
05A	ND	31.6 – 33.0	Silty coarse-grained sands; minor basaltic gravel; contains loosely CaCO <sub>3</sub> cemented sand grains.
06C	ND	35.7 – 37.0	Silty, coarse-grained sands; minor basaltic gravel; contains loosely CaCO <sub>3</sub> coating on sand grains.
06B	ND	37.0 – 38.0	Coarse-grained sand; granular; salt and pepper.
06A		38.0 – 40.0	38.0 – 38.2 Silty coarse-grained sand; minor basaltic gravel; contains CaCO <sub>3</sub> coating on sand grains. 38.2 – 40.0 Medium-grained sand, slightly moist.
07B	ND	45.3 – 45.9	Coarse-grained sand; contains some fine- to medium-grained sand.
07A	ND	45.9 – 47.9	Medium- to fine-grained sand with minor silts; sparse pebbles up to 1 inch; 50% basalt, 50% felsic.
			45.9 CaCO <sub>3</sub> cementing sand into poorly consolidated nodules.

**Table B.1. (contd.)**

Core Number	Polarity	Core Interval (feet)	Description
08A	ND	49.3 – 50.5	Medium- to coarse-grained sands; 50% basalt, 50% felsic; top 2 inches are fine- to medium-grained sand with less than 50% basalt.
09A	ND	50.1 – 52.5	50.1 – 51.0 Medium-grained sand; 25-50% basalt, remainder felsic. 51.0 – 51.5 Layered medium-grained sand and thin silt lenses; 25-50% basalt. 51.5 – 52.2 Medium-grained sand; 25-50% basalt. 52.2 – 52.5 Coarse-grained sand.
10C	ND	55.9 – 56.8	Medium- to coarse-grained sand; 35-50% basalt, 50-65% felsic; 1-2% gravel; core is disturbed.
10B	ND	56.8 – 57.8	Medium-grained sand; 25-50% basalt, 50-75% felsic.
10A	ND	57.8 – 59.8	57.8 – 58.1 Medium- to coarse-grained sand with some CaCO <sub>3</sub> . 58.1 – 58.5 Cemented soil zone; fine- to medium-grained sand. 58.5 – 59.8 Medium-grained sand.
11B	ND	59.6 – 60.6	Medium-grained sand; 50% basalt, 50% felsic.
11A	ND	60.6 – 63.1	Medium-grained sand; 50% basalt, 50% felsic; minor caliche flakes present but not as cemented sand.
12A	ND	69.4 – 70.95	69.4 – 70.0 Sloughing 70.0 – 70.4 Coarse-grained sand; 50% basalt, 50% felsic. 70.4 – 70.7 Clay/silt lens. 70.7 – 70.95 Coarse-grained sand; less than 50% basalt.
13B	ND	75.3 – 75.9	Medium- to coarse-grained sand; 50% basalt, 50% felsic; upper 4 inches is slough.
13A	ND	75.9 – 78.4	Silty, medium- to fine-grained sands; 50% basalt, 50% felsic; minor CaCO <sub>3</sub> coating on sand grains.
14B	ND	79.2 – 80.3	Medium-grained sand; 50% basalt, 50% felsic.
14A	ND	80.3 – 82.8	Compacted medium- to fine- grained sand; some silt; 50% basalt, 50% felsic; minor CaCO <sub>3</sub> probably as grain coating.
15B	ND	89.4 – 90.5	Medium- to coarse-grained sand fining downward to medium-grained sand; 50% basalt, 50% felsic; grains of CaCO <sub>3</sub> apparent; top of the interval is slough and wet.
15A	ND	90.5 – 93.0	Medium- to fine-grained sands; some silt; minor pebbles less than 0.2 inch; CaCO <sub>3</sub> cementing sand grains in places.
16B	ND	99.2 – 100.5	Medium- to coarse-grained sand.
16A	ND	100.5 – 103.0	Medium-grained sand; some CaCO <sub>3</sub> coating grains.
17B	ND	109.4 – 109.8	Medium- to coarse-grained salt and pepper sand; 50-70% basalt, 30-50% felsic; top half of interval is slough.
17A	ND	109.8 – 112.2	Fine- to medium-grained sand; some silt.
18B	ND	115.6 – 116.4	115.6 – 116.3 Coarse-grained sand as slough. 116.3 – 116.4 Coarse- to medium- to fine-grained sand; 50% basalt, 50% felsic.
18A	ND	116.4 – 118.9	Medium- fine-grained sand, some silt; 50% basalt, 50% felsic; less than 1% basalt pebbles.
	ND	118.9 – 119.5	No recovery.
19B	ND	119.5 – 121.0	Medium-grained sand; 50% basalt, 50% felsic; very minor CaCO <sub>3</sub> coating sand grains.
19A	ND	121.0 – 123.5	Medium- to fine-grained sand, some silt; 50% basalt, 50% felsic; bottom 0.3-inch silty fine-grained sand.
20B	ND	129.2 – 129.7	Medium- to coarse-grained sand; 50% basalt, 50% felsic; entire interval is disturbed.

**Table B.1. (contd.)**

Core Number	Polarity	Core Interval (feet)	Description
20A	ND	129.7 – 132.2	Fine- to medium-grained sand, some silt; less than 50% basalt; some CaCO <sub>3</sub> as discrete particles and grain coatings.
		135.2 – 138.0	No recovery.
21B	ND	139.3 – 141.5	Medium- to fine-grained sand, some silt; 50% basalt with scattered basalt pebbles up to 0.1 inch in diameter. 139.8 CaCO <sub>3</sub> weakly cemented zone.
21A	ND	141.5 – 144.0	Medium-grained sand, 10-20% fine-grained sand; 50% basalt, 50% felsic.
22B	ND	149.4 – 151.9	149.4 – 150.2 Medium-grained sand; slightly moist. 150.2 – 150.9 Compacted, slightly cemented, bedded medium-grained sand and silt; layers are 0.25 inch thick. 150.9 – 151.9 Medium-grained sand; minor CaCO <sub>3</sub> , probably as coatings on grains.
22A	ND	151.9 – 154.4	Medium-grained sand with minor silt; 50% basalt, 50% felsic; well developed fine-scale laminations; laminations appear to be due to light/dark minerals; minor CaCO <sub>3</sub> disseminated throughout, probably as grain coatings; not compacted but very loose.
23B	ND	159.4 – 160.4	Medium- to fine-grained sand, some silt; less than 50% basalt; CaCO <sub>3</sub> is present but probably as grain coatings; upper 4 inches is slough.
		160.4 – 160.4	No recovery.
23A	ND	160.4 – 162.9	Fine-grained sand to silt with well developed fine-scale laminations; laminations appear to be due to light/dark minerals; 50% basalt, 50% felsic; well compacted; CaCO <sub>3</sub> probably as grain coatings.
	ND	169.6 – 174.2	No recovery.
24B	ND	179.6 – 180.7	Medium-grained sand; 50% basalt, 50% felsic; CaCO <sub>3</sub> cemented fragments up to 1.2 inch long; entire core is disturbed.
24A	R	180.7 – 182.7	Fine- to medium-grained sand; uniform grain size; 50% basalt, 50% felsic; no bedding; well compacted, minor CaCO <sub>3</sub> cement.
25A	R	189.7 – 191.9	Medium- to fine-grained sand, some silt; 50% basalt, 50% felsic; 1-inch layer of poorly cemented (CaCO <sub>3</sub> ) sand grains.
26A	R to N	196.0 – 198.0	Medium- to fine-grained sand; 50% basalt, 50% felsic.
27A	R	199.3 – 201.3	199.3 – 199.9 Fining upward sequence of coarse pea gravel (1/8 inch diameter) to fine-grained sand; 50% basalt, 50% felsic; well compacted with CaCO <sub>3</sub> coating grains and as minor cement between grains. 199.9 – 200.2 very fine- to fine-grained sand. 0.5 inch thick silt lens. 200.25 – 200.4 Medium-grained sand.
28A	R	206.0 – 208.0	Medium-grained sand with minor pebbles; slightly compacted; minor CaCO <sub>3</sub> probably as grain coatings.
29A	ND	210.9 – 211.4	Four inch of pea gravel (1/8 inch) grading upward into medium-grained sands; sand is 50% basalt, 50% felsic; no bedding; well-compacted sands with minor CaCO <sub>3</sub> cement.
30A	ND	216.1 – 218.1	Pebbly, 4 inches of pea gravel (1/8 inch) grading into coarse-grained sand; 2 inch partly CaCO <sub>3</sub> cemented zone at 216.2 feet.
31A	R	219.6 – 221.6	Fine-grained sand compacted but not cemented; faint bedding. 219.0 Pebbles of basalt and andesite; rounded.
32A	ND	226.1 – 228.1	Medium- to coarse-grained sand; well-compacted with CaCO <sub>3</sub> coating grains; minor moisture.

**Table B.1. (contd.)**

Core Number	Polarity	Core Interval (feet)	Description
33A	ND	229.2 – 231.2	229.2 – 229.8 Pebbly, coarse-grained sand; 50-60% basalt, remainder felsic. 229.8 – 230.0 Gravel up to 1.5 inches; 75% basalt. 230.0 – 230.3 Coarse-grained sand some fine-grained sand and silt; 60-70% basalt. 230.3 – 231.2 Compacted, medium- to coarse-grained sand some silty, fine-grained sand; 60-70% basalt; moist.
34A	ND	236.1 – 238.1	Coarse-grained sand to pea gravel (up to 1/8 to 1/4 inch); some compaction but no cementation; damp.
35A	ND	239.5 – 241.5	239.5 – 240.0 Granular to pebbly gravel (1/8 inch), mainly basalt; no sand matrix, open framework. 240.0 – 240.4 grading into coarser gravel (1/4 to 1/2 inch.); no sand matrix, open framework. 240.4 – 240.9 Coarse gravel with sand matrix; gravel up to 1 inch in diameter; coarse-grained sand; 50% basalt, 50% felsic.
		245.6 – 248.0	No recovery.
36A	ND	268.1 – 270.1	Top 10 inch slough composed of 3 inch of clean gravel over sandy gravel; remainder of core is gravel with medium-grained sand; 15% gravel, 50% basalt, 50% quartzite and metamorphic pebbles.
37A	ND	349.6 – 350.6	Gravels.
38A	ND	379.7 – 381.7	Ringold Formation, Lower Mud unit.

**Table B.2. Descriptions of Core from Borehole 299-E17-22 (C3826) (Reidel and Ho, 2002)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
0' to 8'	ND	No core recovered.
8' to 9'	ND	25% recovered—not opened. Moist, loose, no internal structure preserved. Medium- to coarse-grained sand; 75% basalt and 25% felsic; subrounded to subangular; poorly sorted; color 10YR5/2.
9'-10'	ND	55% recovered. Slightly moist, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Coarse to medium-grained sand: 50% coarse, 40% medium-grained, 7% fine-grained, 3% very coarse, with pebbles up to 0.4 in (diameter); well-cemented zone 1.2 to 1.6 in wide (previously wider?) in the middle of the core (at 9'6"); material above this zone is also slightly cemented with CaCO <sub>3</sub> ; material below this zone is slightly more moist, finer-grained, and shows only a moderate reaction to HCl; 40% basalt and 60% felsic; subangular to subrounded; color 10YR5/2.
10' to 11'	ND	70% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Coarse to very coarse sand: 5-10% gravel, with rounded to subrounded pebbles up to 1 in (diameter), 30% very coarse, 45% coarse, 15% medium-grained, trace of silt; 50% basalt and 50% felsic; subangular to angular; color 10YR5/2.
11' to 12'	ND	95% recovered. Moist, loose, undisturbed. Coarse-grained sand with minor silt, grains up to 0.15 in (diameter); 50-60% basalt and 40-50% felsic; subangular; fairly sorted; color 10YR5/2.  At 11'7" is a 0.8-in--thick layer of silt and clay (possible soil?), separating coarse material above from finer material below.
12' to 13'	ND	50% recovered—not opened. Moist, loose, no internal structure preserved. Medium- to coarse-grained sand; 50-70% basalt and 30-50% felsic; subrounded to subangular; poorly sorted; color 10YR5/2.
13' to 14'	ND	75% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Coarse- to medium-grained sand: 45% coarse, 45% medium- and fine-grained, 10% very coarse, with grains up to 0.16 in (diameter); 45% basalt and 55% felsic; angular to subangular (large grains mostly angular); color 10YR5/2.
14' to 15'	N	95% recovered. Slightly moist, undisturbed, compact. Three color bands apparent. From 14' to 14'2": color band of medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; unsorted. From 14'2" to 14'7.5": fine- to medium-grained sand; compacted, with graded bed fining upwards, each ~0.8 in thick; subangular to subrounded, well-sorted. At the base of this band is a very fine clay zone 0.08 in thick that effervesces. From 14'7.5" to the bottom of the core: coarse sand, with grains up to 0.2 in (diameter); 60% basalt and 40% felsic; subangular; poorly sorted. Color 10YR5/2.
15' to 16'	N	95% recovered. Dry, slightly compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; 10YR5/2. Bands of fine- to medium-grained sand are apparent, and spaced every 1 to 2 in. The most prominent bands are at 15'8" and 15'9". A fairly compact zone is found between 15'6.5" and 15'9.5".
16' to 17'	ND	50% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to fine-grained sand: 55% fine-grained, 40% medium-grained, 5% coarse, 2% very coarse, with grains of basalt up to 0.16 in (diameter); 30-35% basalt and 65-70% felsic; subangular to subrounded; 10YR5/2.
17' to 18'	ND	90 to 95% recovered. Dry, loose, undisturbed. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; 10YR5/2. Pebble layers ~0.5 in thick are found at 17'2.5" and 17'5.5"; both are basalt-dominated, with pebbles up to 1 in (diameter).

**Table B.2. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
18' to 19'	N	90 to 95% recovered. Dry, uncompacted, slightly disturbed. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; 10YR5/2. Layers of coarser sand present.
19' to 20'	ND	60% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium-grained sand: 75% medium-grained, 10% fine-grained, 10% coarse, 5% very coarse, with granitic pebbles up to 0.1 in (diameter); 30 to 40% basalt and 60 to 70% felsic; angular to subangular; moderately well-sorted; 10YR5/2.
20' to 20'6"	ND	No recovery.
20'6" to 21'6"	ND	30% recovered—not opened. Dry, loosely packed, internal structure not preserved. Medium-grained sand, grains up to 0.15 in (diameter); 50% basalt and 50% felsic; subrounded to subangular; color 10YR5/2.
21'6" to 22'6"	ND	90% recovered. Dry, partially disturbed, uncompacted. Medium- to coarse-grained sand with minor silt, grains up to 0.6 in (diameter); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. Some coherent silty nodules present.
22'6" to 23'6"	ND	80% recovered. Dry, disturbed, loose. Medium-grained sand with some silt present; 50% basalt and 50% felsic; subangular to subrounded; poorly sorted; color 10YR5/2.
23'6" to 24'6"	N	90% recovered. Very slightly moist, loose, undisturbed. Medium- to coarse-grained sand, grains up to 0.15 in (diameter); 50% basalt and 50% felsic; subangular to subrounded; fairly well-sorted; color 10YR5/2. Color band at 23'7" composed of a 0.4-in thick silt-rich (up to 50% silt) layer; effervesces.
24'6" to 25'	ND	No recovery.
25' to 26'	ND	Partially recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to coarse-grained sand: 58% coarse, 40% medium-grained, 2% very coarse; 50% basalt and 50% felsic; subangular to angular; color 10YR5/2.
26' to 27'	ND	85% recovered. Dry, loose. Medium-grained sand with minor silt; 50% basalt and 50% felsic; subangular to subrounded; poorly sorted; color 10YR5/2.
27' to 28'	ND	85-90% recovered. Dry, loose. Medium- to coarse-grained sand, grains up to 0.07 in (diameter); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. From 17'8.8" to 17'9.5" is a light color band that is finer (contains more silt) than the rest of the core, and is not compact or coherent.
28' to 29'	ND	Partially recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to coarse-grained sand: 55% medium-grained, 40% coarse, ~2% very coarse, ~2% fine-grained; 40% basalt and 60% felsic; subangular to angular; moderately well-sorted; color 10YR5/2.
29' to 29'6"	ND	No recovery.
29'6" to 30'6"	ND	80-85% recovered—not opened. Dry, loose, disturbed. Medium- to coarse-grained sand with minor silt; subangular to subrounded; poorly sorted; color 10YR5/2.
30'6" to 31'6"	I	95% recovered. Dry, undisturbed, well-compacted. From 30'6" to 30'10": calcareous zone, cemented, fine-grained silt to sand with sparse coarse sand, layered; paleosol? From 30'10" to 31'7.5": medium-grained sand with some coarse bands (apparent at 31' and 31'0.5"); 50% basalt and 50% felsic (fine-grained zones are more felsic); subangular to subrounded; well-sorted. From 31'7.5" to 31'8.2": silt layer. Color 10YR5/2

**Table B.2. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
31'6" to 32'6"	ND	100% recovered. Dry, but slightly moist in silty layers, relatively undisturbed. Medium- to coarse-grained sand; 50% basalt and 50% felsic; well-sorted; color 10YR5/2. Coherent layers of silt and sand are at 31'7.1", 31'8", 31'8.8" to 31'11.9", 32'0.5" to 21'1", 32'2.5", and 32'3.5". These layers are silty with sand, and are each ~0.4 in thick. Silty layers are calcareous, as is silt along the core rim, and barely cemented.
32'6" to 33'6"	ND	75% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to coarse-grained sand: 60% medium-grained, 35% coarse, 5% fine-grained; 40% basalt and 60% felsic; subangular to angular; moderately well-sorted; color 10YR5/2.
33'6" to 34'		No recovery.
34' to 35'	ND	85% recovered. Dry, loose, uncompacted. Coarse to very coarse sand: 30% very coarse, 60% coarse, 10% medium-grained; 50% basalt and 50% felsic; subangular to angular; moderately well-sorted; color 10YR5/2.
35' to 36'	R	85% recovered. Dry, loose. Coarse sand: 10% very coarse, 80% coarse, 10% medium-grained; 40% basalt and 60% felsic; moderately well-sorted; 10YR5/2 color 10YR5/2.
36' to 37'	ND	90% recovered. Dry, very loose. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well sorted; 10YR5/2 color 10YR5/2.
37' to 38'	ND	85% recovered. Dry, loose, uncompacted. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
38' to 39'	N	85% recovered. Dry, compacted. Fine- to medium-grained sand; 50% basalt and 50% felsic; well sorted; 10YR5/. Numerous layers of CaCO <sub>3</sub> -rich zones, from 0.1 to 1.5 in wide. Color 10YR5/2
39' to 40'	N	90% recovered. Fairly compacted. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well sorted. Layer of silt and CaCO <sub>3</sub> about 0.4 in thick at 39'5.5" separating darker (more black and fresh?) material above from more brownish-reddish (more clayey and weathered?) material below. Color 10YR5/2
40' to 41'	N	100% recovered. Intact, not disturbed, well compacted. Medium- to coarse-grained sand with trace of silt; 50% basalt to 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
41' to 42'	ND	90% recovered. Very slightly moist, moderately compact in the middle of core. Medium- to coarse-grained sand: 5% very coarse, 75% coarse, 20% medium-grained. Between top of core and 41'3.1", disturbed and loose, mostly medium-grained sand; between 41'3.1" and 41'6.7" is a fining-upwards sequence (mostly coarse sand between 41'3.1" and 41'4.7", and an obvious band of very coarse sand between 41'4.7" and 41'6.7", with angular to subangular grains up to 0.2 in (diameter); between 41'6.7" and 41'10.6" is another upwards-fining sequence, from medium-grained to medium- and coarse-grained sand; core from 41'10.6" to the bottom is empty. 40 to 50% basalt and 50 to 60% felsic; subangular to angular; moderately well-sorted; color 10YR5/2.
42' to 42'6"		No recovery.
42'6" to 43'6"	ND	60% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to coarse-grained sand: 30% coarse, 60% medium-grained, 10% very coarse; 40 to 50% basalt and 50 to 60% felsic; subangular to angular; fairly well-sorted; color 10YR5/2.
43'6" to 44'6"	I	90% recovered. Slightly moist, slightly compact. Coarse sand: 70% coarse, 20% medium-grained, 10% very coarse; possible color bands ~1.2 to 1.6 in wide (upwards-fining sequences from very coarse to medium-grained sand); distinct pebble layer between 43'11.7" and 44'0.6", with grains up to 0.24 in (diameter); 50% basalt and 50% felsic; mostly angular, with some subangular grains; fairly well-sorted; color 10YR5/2.
44'6" to 47'		No recovery.

**Table B.2. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
47' to 48'	ND	90% recovered. Slightly moist, slightly compact. Medium-to coarse-grained sand: 15% very coarse (mainly in the upper half of core, with grains up to 0.1 in diameter), 35% coarse, 50% medium-grained; 40 to 50% basalt and 50 to 60% felsic; angular to subangular; fairly sorted; color 10YR5/2.
48' to 49'	R	95% recovered. Compact. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well sorted; color 10YR5/2. Silty CaCO <sub>3</sub> -rich layer from 48'6.7" to 48'8.7".
49' to 50'	R	80% recovered. Very slightly moist, very slightly compact, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to coarse-grained sand, with grains up to 0.16 in (diameter); 50% basalt and 50% felsic; angular to subangular; moderately sorted; color 10YR5/2.
50' to 51'	I	95% recovered. Compact. Medium-grained sand, with basalt clasts up to 0.4 in (diameter); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. Some color banding, with basalt-rich layers appearing slightly darker.
51' to 58'		No recovery.
58' to 59'	I	85% recovered. Loose, uncompacted. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well sorted; color 10YR5/2.
59' to 60'	ND	90% recovered. Loose, uncompacted. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
60' to 61'	ND	85% recovered. Moderately compact. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. Color bands and fining-upward sequences 0.4 to 0.8 in thick.
61' to 62'	I	90% recovered. Compact. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. Faint color banding.
62' to 64'6"		No recovery.
64'6" to 65'6"	ND	80% recovered. Slightly moist, slightly compact in middle of core, disturbed. (Opened previously for LBL oxygen isotope study.) Fine- to medium-grained sand: 55% medium-grained, 40% fine-grained, 5% coarse; 35 to 40% basalt and 60 to 65% felsic; subangular to angular; well-sorted; color 10YR5/2.
65'6" to 66'6"		No recovery.
66'6" to 67'6"	I	90% recovered. Loose, not compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well sorted; color 10YR5/2.
67'6" to 68'		No recovery.
68' to 69'	ND	85% recovered. Not compact. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. Contains CaCO <sub>3</sub> -rich nodules up to 0.8 in (diameter) between 68'2" and 68'4".
69' to 70'	I	85% recovered. Fairly compact. Between 69' and 69'4", medium-grained sand in 0.2-in-thick bands; from 69'4" to 70' is medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
70' to 71'	ND	90% recovered. Dry, loose, uncompacted. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
71' to 72'	ND	90% recovered. Moderately compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. From 71'7" to 71'9" is a silty layer containing color bands ~0.4 in wide.

**Table B.2. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
72' to 73'	ND	85% recovered. Dry, loose. Medium- to coarse-grained sand; fine- to medium-grained sand with silt between 72'10' and 73'; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
73' to 74'	N	90% recovered. Moderately compacted. Medium- to fine-grained sand, cemented with CaCO <sub>3</sub> between 73' and 73'4"; lower part of core is composed of medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
74' to 75'	ND	85% recovered. Loose, uncompacted. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
75' to 76'	I	95% recovered. Fairly compact. Medium- to coarse-grained sand (mostly coarse), with fining-upwards bands about 0.8 to 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
76' to 76'6"		No recovery.
76'6" to 77'6"	I	80% recovered. Uncompacted. Uppermost 2.5 in is empty; from 76'8.5" to 77'3" is medium- to fine-grained, CaCO <sub>3</sub> -cemented sand, poorly sorted; from 77'3" to the bottom of the core is medium- to coarse-grained sand. All material is fairly well-sorted; subangular to subrounded; color 10YR5/2.
77'6" to 78'6"	ND	80% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to coarse-grained sand: 65% medium- to fine-grained; 35% coarse; 30% basalt and 70% felsic; angular to subangular; moderately sorted; color 10YR5/2.
78'6" to 79'6"	ND	X% recovered. Very compact. Medium- to coarse-grained sand, with bands of fining-upwards sequences 1.2 to 1.6 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
79'6" to 80'6"	N	95% recovered. Well-compacted. Medium- to coarse-grained sand, with subtle fining-upwards sequences ~0.8 in wide each; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
80'6" to 96'		No recovery.
96' to 97'	N	80% recovered. Slightly moist, uncompacted. Medium- to coarse-grained sand (mainly medium-grained); subangular to subrounded; well-sorted; color 10YR5/2.
97' to 98'	ND	85% recovered. Slightly moist, not compact. Medium- to fine-grained sand, with fining-upward sequences about 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
98' to 99'	ND	85-90% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Medium- to fine-grained sand: 50% medium, 50% fine; 40% basalt and 60% felsic; angular to subangular; well-sorted; color 10YR6/2.
99' to 100'	I	90% recovered. Moderately compact. Fine- to medium-grained sand between 99' and 99'8.7"; medium- to coarse-grained sand between 99'8.7" to 99'11.8"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
110' to 119'		No recovery.
119' to 120'	R	90% recovered. Not compact. One large fining-upward sequence: medium-grained sand in lower part, fine-grained sand in uppermost 2.4 in of core; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
120' to 121'	N	95-100% recovered. Medium-grained sand, with 0.8-in-wide fining-upwards bands apparent; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; 10YR5/2.

**Table B.2. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
121' to 122'	ND	85% recovered. Dry, slightly compact, disturbed. (Opened previously for LBL oxygen isotope study.) Fine to very fine sand, thin (<0.1 in wide) coherent layers visible between 121'2.4" and 121'8.3" of very fine-grained sand between darker, basalt-rich medium-grained layers; 60% fine-grained, 40% medium-grained; very fine-grained loose sand between 121'8.7" and 121'11"; lowermost 1 in of core empty; no HCl reaction; 45% basalt and 55% felsic; well-sorted; color 10YR5/2.
122' to 123'	N	98% recovered. Compact. From the top of the core to 122'0.6" is fine-grained sand; from 122'0.6" to 122'3.5" is very coarse sand with color banding; from 122'3.5" is a 0.08-in-wide very fine clay layer, iron-stained at the top; from 122'3.5" to 122'10.2" is the top of another fining-upwards sequence, medium-grained sand; from 122'10.2" to 122'11.8" is coarse-grained sand at the bottom of this sequence; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
123' to 149'		No recovery.
149' to 150'	ND	90% recovered. Slightly compact. Medium- to coarse-grained sand, with fining-upwards sequences about 0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. A transition from sand above to more silt below occurs at 149'10.2". Pebbles about 0.8 in (diameter) occur at 149'4".
150' to 151'	I	90% recovered. Well-compacted. Medium- to coarse-grained sand, some coarse basalt-rich layers fining upwards in layers ~0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted. Color 10YR5/2
151' to 152'	ND	90% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Sand: 70% medium-grained, 30% fine-grained, coarse layer with grains up to 0.12 in (diameter) between 151'5.5" and 151'5.9"; 40% basalt and 60% felsic; subangular to subrounded; moderately sorted; color 10YR6/2.
152' to 153'	ND	90% recovered. Moderately compact. Medium- to fine-grained sand, with subtle fining-upwards sequences ~3.5 in wide; subangular to subrounded; well-sorted; color 10YR5/2.
153' to 163'6"		No recovery.
163'6" to 164'6"	R	80% recovered. Loose, uncompacted, poorly consolidated. Medium- to fine-grained sand, one fining-upwards sequence; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
164'6" to 165'6"	ND	95 recovered. Compact. Medium- to fine-grained sand, with subtle upward-fining sequences ~2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
165'6" to 166'6"	N	95% recovered. Compact. Fine- to medium-grained sand, with fining upward sequences ~3 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
166'6" to 167'6"	ND	90% recovery. Moderately compact. Medium- to fine-grained sand; with fining upward sequences ~2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted. The zone between 167'2.5" and 167'2.9" is lined at the top and bottom by brownish silt stringers <0.04 in wide. Color 10YR5/2
167'6" to 168'		No recovery.
168' to 169'	N	85% recovered. Compact. Mainly medium- to coarse-grained sand; at 168'4.7" is a caliche zone ~1.1 in thick showing soft-sediment deformation, with a lobe protruding 3 to 7.5 in out of the band; at 168'10.6" is a 0.11-in-wide clay layer at the top of an upward-fining sequence; fine sand between 168'10.6" to 168'11.8".

**Table B.2. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3826)
169' to 170'	ND	98% recovered. Well-compacted. Medium- to fine-grained sand, one large fining-upwards sequence; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. Contact between one fining-upwards sequence above and another below at 169'10.6".
170' to 171'	N	95% recovered. Compact. Medium- to coarse-grained sand, with fining-upward sequences 1-2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
171' to 172'6"		No recovery.
172'6" to 173'6"	ND	80% recovered. Loose, uncompacted, poorly consolidated. Coarse- to medium-grained sand, mostly coarse, with pebbles up to 0.4 in (diameter) in a layer between 173'0.3" to 173'1.9"; subangular to subrounded; fairly sorted; color 10YR5/2.
173'6" to 174'6"	R	95% recovered. Compact. Medium- to coarse-grained sand, with fining upwards sequences (coarse to fine) each ~0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
174'6" to 175'6"	ND	95% recovered. Well-compacted. Medium- to coarse-grained sand, with upward fining sequences ~0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
175'6" to 176'6"	R	95% recovered. Compact. Medium- to coarse-grained sand, with color bands of upward-fining sequences about 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
176'6" to 179'		No recovery.
179' to 180'	I	90% recovered. Moist, moderately compact. Medium- to coarse-grained sand, with fining-upwards sequences ~3.5 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
180' to 181'	ND	95% recovered. Well-compacted. Medium- to coarse-grained sand, with upwards-fining sequences 2 to 2.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. At 180'1.6" is a layer of clay ~0.04 in wide.
181' to 182'	R	90% recovered. Well-compacted. Medium- to coarse-grained sand, containing fining-upwards sequences mostly ~1 in but up to 5.5 in wide, with 0.4-in-wide sequences within the thicker bands; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
182' to 183'	R	85% recovered. Dry, loose, disturbed. (Opened previously for LBL oxygen isotope study.) Sand: 75% medium- and fine-grained, 25% coarse; 40% basalt and 60% felsic; subangular to subrounded; moderately well-sorted; color 10YR6/2.
183' to 219'		No recovery.
219' to 220'	ND	95% recovered. Moderately compact. Coarse- to very coarse-grained sand, with a pebbly zone between 219'4.7" and 219'6.3" containing pebbles mainly of basalt up to 0.8 in (diameter); 60% basalt and 40% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
220' to 221'	R	90% recovered. Compact. Medium- to very coarse-grained sand, with pebbles up to 0.4 in (diameter) and fining-upwards sequences ~3 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
221' to 222'	ND	95% recovered. Compact. Coarse- to very coarse-grained sand, with clasts up to 0.8 in (diameter); coarse basalt-rich bands and upward-fining sequences 2 to 2.5 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.

**Table B.3. Descriptions of Core from Borehole 299-E17-23 (C3827) (Reidel and Ho, 2002)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3827)
0' to 53.5'		No recovery.
53'6" to 54'6"	R	45% recovered. Moist, compact. Medium- to coarse-grained sand: 15% very coarse, 30% coarse, 60% medium-grained, with grains up to 0.1 in (diameter); 50% basalt and 50% felsic; angular to subangular; moderately well-sorted; color 10YR5/2.
54'6" to 55'6"	ND	95% recovered. Moist, compact. Medium- to coarse-grained sand, with upwards-fining sequences ~0.8 in wide; 50% basalt and 50% felsic, subangular to subrounded; well-sorted; color 10YR5/2.
55'6" to 56'6"	R	100% recovered. Moist, compact. Medium- to coarse-grained sand with crude, subtle upwards-fining sequences ~ 2 in wide; medium- to coarse-grained sand between 56'5.4" and 56'5.8"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2. A fine-grained sand to silt lens between 56'4.2" and 56'5.4" has a 0.04 in layer of clay at the bottom and top.
56'6" to 57'6"	ND	93% recovered. Moist, compact. Coarse sand from top of core to 56'7.8"; very coarse sand between 56'7.8" and 56'11.5"; medium-grained sand between 56'11.5" and 57'0.3", a dark band containing ~60% basalt; continued coarsening downward, from 57'0.3" to 57'5.8"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
57'6" to 58'		No recovery.
58' to 59'	ND	95% recovered. Moist, moderately compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
59' to 60'	ND	96% recovered. Moist, moderately compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
60' to 61'	R	99% recovered. Moist, compact. Medium-grained sand from the top of core to 60'6.7", with color bands 0.8 to 1.2 in wide; coarse to very coarse sand between 60'6.7" and 60'9.4", with pebbles up to 0.8 in (diameter) at 60'9.4"; coarse sand between 60'9.4" and bottom of core; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
61' to 62'	ND	95% recovered. Slightly moist, compact. Medium- to coarse-grained sand, with upwards-fining sequences (very coarse to medium-grained sand) ~2.8 in wide and pebbles up to 0.6 in (diameter); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
62' to 62'6"	ND	No recovery.
62'6" to 63'6"	ND	95% recovered. Compact. Moist, medium-grained sand from top of core to 62'8"; bioturbated, calcareous <b>paleosol</b> , medium- to fine-grained between 62'8" and 62'11.9"; dry, coarse-grained sand with disseminated CaCO <sub>3</sub> and pebbles up to 0.2 in (diameter) between 62'11.9" and 63'5". Color 10YR5/2.
63'6" to 65'6"	ND	No recovery.
65'6" to 66'6"	ND	92% recovered. Moist, compact. Very coarse-grained sand from the top of core to 65'11.5"; coarse sand between 65'11.5" and the bottom of core; subangular to subrounded; well-sorted; color 10YR5/2.
66'6" to 76'		No recovery.
76' to 77'	ND	100 recovered. Moist, slightly compact (more compact near the bottom of core). Medium- to coarse-grained sand, with faint color banding 0.8 to 1.2 in wide in the bottom half of core; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
77' to 78'	ND	100% recovered. Moist, compact. Medium- to coarse-grained sand, with upwards-fining sequences 1.2 to 2.8 in wide; a prominent upwards-fining sequence between 77'7.9" and 77'11.8"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.

**Table B.3. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3827)
78' to 79'	ND	100% recovered. Moist, compact. From the top of core to 78'3.5", coarse to very coarse sand at the top to medium-grained sand at the bottom, with color bands ~0.4 in wide; from 78'3.5" to 78'5.3", a fine sand-silt band; from 78'5.3" to 78'9.1", coarse to very coarse sand; from 78'9.1" to the bottom of core, coarse sand at the top to medium-grained sand at the bottom, with a band of fine material at 78'9.4"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
79' to 80'	ND	95% recovered. Moist, compact. Two prominent fining-upwards sequences: between 79'0.4" and 79'7.7", a sequence of medium- to fine-grained sand; between 79'7.7" and 79'11.8", a sequence of medium- to very fine-grained sand; color banding due to basalt between 79'4.7" and 79'7.5"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
80' to 98'		No recovery.
98' to 99'	ND	95% recovered. Moist, coarse to very coarse sand from the top of core to 98'7"; drier, medium- to coarse-grained sand fining upwards between 98'7" and the bottom of core; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
99' to 100'	ND	100% recovered. Slightly moist, compact. Medium-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
100' to 101'	I	100% recovered. Slightly moist, compact. Fine- to coarse-grained sand, in one large fining-upwards sequence; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
101' to 102'	ND	95% recovered. Slightly moist, well-compacted. Medium- to coarse-grained sand, with a band of finer-grained sand between 101'7.5" and 101'8.7"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
102' to 119'		No recovery.
110' to 120'	ND	100% recovered. Moist, compact. Medium- to coarse-grained sand, with the uppermost 2.8 in of core slightly more coarse, and containing color bands 1.5 to 2 in wide, probably upwards-fining; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
120' to 121'	R	100% recovered. Slightly moist, compact. Medium- to coarse-grained sand, with color bands ~0.8 in wide and subtle upwards-fining sequences(?); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
121' to 122'	ND	100% recovered. Slightly moist, compact. Medium- to coarse-grained sand, with color bands ~0.8 in wide and subtle upwards-fining sequences(?); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
122' to 123'	ND	90% recovered. Slightly moist, compact. Medium- to coarse-grained sand, with color bands ~0.8 in wide and subtle upwards-fining sequences(?); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
123' to 149'		No recovery.
149' to 150'	ND	93% recovered. Dry, slightly compact, fairly loose. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
150' to 151'	ND	90% recovered. Dry, moderately compact. Medium-grained sand, with grains up to 0.2 in (diameter); subangular to subrounded; well-sorted; color 10YR5/2.
151' to 152'	ND	90% recovered. Dry, moderately compact. Medium- to fine-grained sand, with upwards-fining bands ~1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
152' to 153'	ND	90% recovered. Dry, moderately compact. Medium- to fine-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
153' to 153'6"		No recovery.

**Table B.3. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3827)
153'6" to 154'6"	ND	95% recovered. Moderately moist, uncompacted. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
154'6" to 155'6"	R	95% recovered. Dry, moderately compact. Medium- to coarse-grained sand from the top of core to 154'11.5"; from 154'11.5" to the bottom of core, very coarse sand with pebbles up to 1 in (diameter); most pebbles are found in a layer at 155'3.8"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
155'6" to 156'6"	ND	95% recovered. Dry, slightly compact. Coarse sand with pebbles up to 0.4 in (diameter) from the top of core to 155'11.5"; medium- to coarse-grained sand between 155'11.5" and 156'5.8"; pebbles up to 1.6 in (diameter) at 156'3.8"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
156'6" to 157'6"	ND	95% recovered. Dry, slightly compact. Fine- to medium-grained sand, with fining-upwards sequences ~1.2 in side; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
157'6" to 158'		No recovery.
158' to 159'	I	95% recovered. Dry, slightly compact. Uppermost 1.6 in of core is empty; fine-grained, compact paleosol cemented with CaCO <sub>3</sub> between 158'1.6" to 158'5.1"; less cemented medium- to fine-grained sand between 158'5.1" and 158'8.7"; from 158'8.7" to the bottom of core, slightly cemented, compact medium- to fine-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
159' to 160'	ND	98% recovered. Moist, compact. Medium- to coarse-grained sand with upwards-fining sequences 0.8 to 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
160' to 161'	ND	97% recovered. Dry, moderately compact. Medium- to fine-grained sand, with fining-upwards sequences ~0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
161' to 162'	ND	96% recovered. Dry, slightly compact. Medium- to fine-grained sand, with fining-upwards sequences (possibly fining-downwards?) 0.8 to 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
162' to 162'6"		No recovery.
162'6" to 163'6"	ND	90-95% recovered. Dry, slightly compact. Fine- to medium-grained sand: 65% fine-grained, 35% medium-grained, trace of coarse sand. From the top: to 162'8" down, disturbed and loose; between 162'7.2" and 162'8" down, possible layer of well-cemented (with CaCO <sub>3</sub> ), fine- to very fine-grained sand, but mostly disturbed; between 162'8" and 163'0.9", mainly fine-grained sand with faint color bands 0.8 to 1.6 in wide; between 163'0.9" and 163'4.2", mainly medium-grained sand with faint color bands 0.4 to 0.8 in wide; between 163'4.2" and bottom of core is disturbed and loose. 40% basalt and 60% felsic; subangular to angular; well-sorted; slight HCl reaction; color 10YR6/2.
163'6" to 164'6"		No recovery.
164'6" to 165'6"	ND	95% recovered. Dry, loose, uncompacted. Medium- to fine-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
165'6" to 166'6"	ND	90% recovered. Dry, moderately compact. Fine- to medium-grained sand, with upwards-fining sequences ~0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
166'6" to 179'		No recovery.

**Table B.3. (contd.)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Description of Core (C3827)
179' to 180;	ND	95% recovered. Dry, loose. Uppermost 1.2 in of core empty; coarse to very coarse sand between 179'1.2" and 179'2.8"; very coarse sand between 179'2.8" and 179'6.5"; medium- to coarse-grained sand from 179'6.5" to bottom of core; pebbles up to 0.8 in (diameter) in upper 6.5 in of core; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
180' to 181'	R	98% recovered. Dry, compact. Medium- to coarse-grained sand, with color bands (upwards-fining sequences) 0.8 to 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
181' to 182'	ND	96% recovered. Dry, well-compacted. Medium- to coarse-grained sand, with color bands (upwards-fining sequences) 0.8 to 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
182' to 183'	ND	99% recovered. Dry, well-compacted. Medium- to coarse-grained sand, with color bands (upwards-fining sequences) 0.8 to 1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
183' to 219'		No recovery.
219' to 220'	ND	75% recovered. Dry, not compact. Coarse to very coarse sand, with pebbles, mainly of basalt, up to 0.8 in (diameter); 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
220' to 221'	ND	96% recovered. Dry, compact. Uppermost 1.2 in of core is empty; between 220'1.2" to 220'6.3", very coarse sand; between 220'6.3" and 220'7.1", medium- to coarse-grained sand; between 220'7.1" and bottom of core is coarse and very coarse sand; pebbles mostly 0.8 in (diameter) but up to 0.8 in; subtle color bands (fining-upwards sequences) ~1.2 in wide throughout core; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
221' to 222'		95-100% recovered—not opened.
222' to 223'	ND	85% recovered. Dry, moderately compact (especially in lower part of core). Uppermost 0.8 in of core is empty; between 222'0.8" and 222'6.3", very coarse sand, with pebbles up to 0.8 in (diameter), containing a 0.2-in-wide medium-grained sand layer at 222'5.1"; between 222'6.3" and 222'10.6", medium- to coarse-grained sand; core is empty between 222'10.6" and the bottom; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.

**Table B.4. Descriptions of Core from Borehole 299-E17-25 (Reidel and Ho, 2002)**

Depth Below Surface (feet and inches)	Polarity Preliminary	Borehole 3828 Description of Core
0' to 53'6"		No recovery.
53'6" to 55'6"	ND	99% recovered. Moist, compact. Medium- to coarse-grained sand, with a 0.2-in-wide silt band at 54'0.7" and subtle upwards-fining sequences ~1.2 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
55'6" to 57'6"	ND	90% recovered. Moist, compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
57'6" to 58'		No recovery.
58' to 60'	ND	95% recovered. Moist, compact. Medium- to coarse-grained sand; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
60' to 62'6"		No recovery.
62'6" to 64'6"	ND	97% recovered. Moist, compact. Medium- to coarse-grained sand, with subtle upwards-fining sequences; 50% basalt and 50% felsic; well-sorted; color 10YR5/2.
64'6" to 65'6"	ND	97% recovered. Moist, compact. Medium- to coarse-grained sand, with upwards-fining sequences ~1.1 in wide, scattered pebbles up to 0.8 in (diameter) and a silt layer 0.11 in wide at 65'4"; 50% basalt and 50% felsic; subangular to subrounded; color 10YR5/2.
65'6" to 153'		No recovery.
153' to 155'	ND	60% recovered. Moist. Empty between 153' and 153'9.4"; silt layer from 153'2" to 153'2.4" separating medium- to fine-grained sand below from medium- to coarse-grained sand above; silt lens ~0.4 in wide at 153'11". Medium- to coarse-grained sand' 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
155' to 158'		No recovery.
158' to 160'	ND	100% recovered. Moist, compact. Layered: 158' to 158'3.5", silt lens; 158'3.5" to 159'1.8", upwards-fining sequence; 159'1.8" to 159'3", banded layers of finer and coarser material; 159'3" to 159'4.1", band of sand with fine-grained clay at the top and bottom; 159'4.1" to 159'8", upwards-fining sequence; 159'8" to 159'8.3", layer of clay at the top of the lowermost upwards-fining sequence; 159'8.3" to the core bottom, fine- to medium-grained sand. Color 10YR5/2.
160' to 162'	ND	96% recovered. Moist, compact. Medium- to coarse-grained sand, with a possible paleosol between 161'5.7" and 161'9.7"; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
162' to 162'6"		No recovery.
162'6" to 164'6"	ND	100% recovered. Moist, compact. Medium-grained sand, with crude banding ~0.8 in wide; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.
164'6" to 166'6"	ND	96% recovered. Moist, compact. Medium- to fine-grained sand, with subtle upwards-fining sequences; 50% basalt and 50% felsic; subangular to subrounded; well-sorted; color 10YR5/2.

**Table B.5. Descriptions of Core From 299-E24-21 (Reidel et al. 2001)**

Depth	Polarity	Interval Description
45' to 45'11 1/2''	(47) Reversed 2	Core is in 2 parts. Some of the core is gone and was sampled for hydrologic properties. 45 to 45'3" lost when end caps were pulled off to opening for hydrologic properties.
46'7'' to 47'		Core is disturbed, coarse sand (0.5 to 1mm); sparse pebbles up to about 4 cm; sand is subangular; pebbles are round; color is 10 YR5/2; no cementation, no compaction; silt on edge of tube effervesces (strongly) 95% sand, slightly silty, about 2% gravel.
47 to 49	No data	100% full. Silt shaken to surface; some compaction. Sediment shows layering with a contact at 48.5'. 48.5' to 49' is fine sand, ~0.1 to 1.5 mm in size with some subtle bedding and some upward fining.  47' to 48.5' is coarse (1.5 to 1.0mm) sand with few sparse pebbles up to 7mm (metamorphic). Sand is subangular, salt & pepper, fining upward with subtle bedding. 40% basalt, 60% felsic. (quartz, mica), well sorted. Sediment is ~5% silt and 95% sand. Silt effervesces, sand does not.  49' angular to subangular; 75% felsic, 25% basalt; some calcite crystals.  The sample was coherent when opened. Core is drying out as it is describe. Good potential for paleomagnetic sample. Core is 26" long.
50' to 51.5'	(51) Reversed 2	Core was disturbed when sampled for hydrologic properties. Coarse sand (1.5 to 1mm), subangular to subrounded, moist but not wet, no cementation or compaction. Some grains up to 2-3 mm (sparse). Core is 30% basalt, 70% felsic. Silt along edge of liner effervesces.
52 to 54.2'	(53) Indeterminate	A 1/8'' thick clay seam at 52' 6". Coarse sand (0.5 to 1 mm) above the seam; sand is approximately 50% basalt, 5% felsic, subangular, and moist; slight compaction but no cementation. Rare pebbles to ~ 5mm. Silt on edges effervesces strongly. Core is 99% sand.  Below the seam is fine sand (0.1 to 0.25mm) with a series of seams at 52'8'' resulting in crude bedding. Sparse basalt pebbles (up to 8mm). Silt on edges shows strong fizz. Banding is 1/8 to 1/4'' thick.  53' 0.5 to 1 mm; subangular; 60% felsic, 40% basalt. 54.2' Fine grained (0.1 mm) with larger (0.5 to 1mm) grains; 60% felsic, 40% mafic.
60 to 62'	No data	Upper 3'' of this core was lost in the field during sampling. From 60' to 60'8'' is coarse sand up to 1 mm. Sand shows fining down structure, slightly moist, no cement. Rare pebbles up to 10mm consisting of quartzite. Silt on edges effervesces strongly.  From 60'8'' to 62' is finer sand. 50% basaltic. Sand is subround to subangular; no cement and little compaction.  61' 0.5 to 1.5 mm with some grains as large as 2 mm; smaller grains are subangular; larger grains subrounded; 70 felsic, 30% mafic.
62 to 64'	(63) Reversed 2	Liner is full, sample not disturbed. Core is 95% sand and 5% silt. Sand is coarse (0.5 to 1 mm), angular, salt & pepper sand with no apparent bedding, no cementation, and no compaction. About 50% basaltic and 50% felsic; the felsic fraction is quartz and feldspar with mica up to 3mm. Sand is poorly sorted.  63' 0.5 to 1 mm; subangular to subrounded; 60% felsic, 40% mafic; some calcite crystals.  Silt portion effervesces strongly. Silt shakes to surface of core. 2' section is uniform throughout. 22 1/2'' long core

**Table B.5. (contd.)**

Depth		Polarity	Interval Description
65 to 67'	R2	(66) Indeterminate	Lost material at 67' when dropped in field. Sand is ~0.25 to 0.5mm in size; 40% basalt; 60% felsic; angular to subangular. Some granules up to ~2mm. Core shows no sorting, no cementation and no compaction. Core is dry. Silt on edge effervesces strongly.
67 to 69'		(68) Indeterminate	Core is composed of sand that is 0.25-0.5mm in size; 40% basalt 60% felsic; and subangular in larger grains. A few basalt pebbles up to 10mm. Core shows no sorting, is slightly moist, and has some faint bands noted by color changes. No compaction, no cementation Core is 99% sand and 1% silt (effervesces)  Top 8'' of core is slightly cemented with CaCO <sub>3</sub> .
70 to 72'	R2	(71.5) Reversed 2	70' to 70'6'' lost in the field.  Core is medium sand (~0.5 mm up to 1.5 mm) that is 40% basalt and 60% felsic. No pebbles. Sand is well sorted, slightly moist, and shows no structure or cementation. Core is 99.9% sand with minor silt on edges that effervesces strongly.
72 to 74'		No data	Core shows fining upward sequences ~ 2'' thick. Sediment is 99.9% sand from about 0.25 to 0.6mm in size, subangular, and 50% felsic 50% basaltic. Small pebble layer at 73' 7 1/2'' that is 1/4'' thick with pebbles ~ 5mm in size. Color ranges from 5YR5/1 (lighter material) to 10YR5/1 (darker material). Core is slightly damp with no cementation and good compaction. Silt on edges strongly effervesces.
75 to 77'		(77.5) Reversed 2	Core shows no geologic structure. Core consists of coarse, subangular sand (1 to 7mm), and contains about 10% subrounded pebbles. Sand is 40% basalt and 60% felsic; pebbles are basalt. Core is compact but no cement. About 2% silt on edges that effervesces.
77 to 79'	R2	(77.5) Reversed 2	77 to 78' 3 1/2'' = unit 1 coarse sand 78'7'' - 78' 3 1/2'' = fine unit 78'7'' to 79' = unit 3  77' 1 1/2'' is well compacted, coarse sand (up to 1mm) with up to 5% pebbles up to 7mm; unit is fining upward.  77'6'' to 77'8'' is finer grained (< 1mm) with fewer pebbles.
		(78) Reversed 2	77'8'' is a fine pebble band ~ 1/4'' thick (basalt pebbles); pebbles are rounded and sand is subangular.
		(78.6)	77'8'' to 78' 3 1/2'' is a medium to coarse sand with scattered pebbles up to 7mm in size. Sand is 50% basalt and 50% felsic, poorly sorted, slightly moist, and very compact. Silt on the edge strongly effervesces.  78' 3 1/2'' to 78' 7 1/4'' is a banded, bedded, fine grain section (5YR6/2); bands are distinguished by color and hardness. <u>Possible paleosol layer</u> . Grains are 0.25 to 0.5; 70% felsic and 30% basaltic.  78' 7 1/4'' to 79' is coarse sand, 50% basalt and 50% felsic, no compaction or cement, slightly disturbed due to filter paper.
		No data	The core section includes only 18'' of soil with 6'' of bubble wrap. At 82' to 80.5' is coarse grained sand (0.5 to 2 mm with some grains up to 5 mm), salt & pepper 50% basalt and 50% felsic; slightly moist. Larger grains are subround, most grains subangular. No compaction or cementation. About 1% silt; silt on edge of lexan liner effervesces strongly.
80.5 to 82'	R2		
82 to 84'		(83) Reversed 2 (?)	Fining upward sequences about 3 1/2'' wide. Sand up to 2 mm in size; finer sand is 0.25 to 0.5mm. Sand is 50% basalt, 50% felsic with coarser material being mostly basalt. Sand is subangular, slightly moist, with no cement. Silt effervesces. Sediment is 99% sand.

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
85 to 86'	No data	Fining upward sequences about 3 ½'' wide. Sand up to 3 mm in size; finer sand is 0.25 to 0.5 mm. Sand is 50% basalt, 50% felsic with coarser material being mostly basalt. Sand is subangular, slightly moist, with no cement. Silt effervesces. Sediment is 99% sand.
87 to 89'	(88) Indeterminate	Core has a layered structure. Sand is medium grained (0.5 to 1 mm) with about 1% basalt and quartzite pebbles up to 5 to 7 mm. Sand is 40% basalt and 60% felsic. Layer at 88' 5 ½'' is about ½'' thick and is coarser with more basalt. Core is slightly moist with no cement and no compaction. Less than about 1% silt on edges that effervesces.
90 to 92'	No data	Core shows some bedding. Sand is medium to coarse grained (0.5-2.0 mm), subangular with about 5% pebbles up to 5mm. 50% basalt, 50% felsic. Bedding at 91.'9'' is a fine-sequence (0.25 mm), well sorted, with very little moisture and no cementation. Silt reacts with HCl along edge.
92 to 94'	(91) Indeterminate	Intact core. Bedding is present. Sand is 0.25 to 0.5mm in size, 50% basalt and 50% felsic, subangular, and very little moisture. Core is compacted with no cementation. Bedding is defined by color. Silt effervesces.
95 to 97'	No data	Upper 6'' of core is missing. Sediment is bedded, fining upward sequences about ~ 1 ½'' thick. Sand is 0.25 to 0.5mm in size with some grains up to ~ 2mm. Sand is subangular, dry, well sorted, and 60% basalt and 40% felsic. No cement and slight compaction. Silt on the edges effervesces.
97 to 99'	(89) Indeterminate	Intact core. Bedding is present and is about 2'' to 5'' thick; fining upward sequences decreasing in size upward. Sand is 0.25 to 8.5 mm in size; 40% basalt and 60% felsic; well sorted, dry, and subangular. There is no cement but core is extremely compact. Silt effervesces.
100 to 102'	(100.5) Indeterminate	Upper 3'' of core is missing. 100'3'' to 100'8'' is medium to fine grain (0.25 to 0.5 mm) sand with crude bedding. Sand is wet with the felsic component greater than the basalt component. Well sorted, no cement and no compaction. 50% basaltic, 50% felsic. No HCl reaction. There is a curved (dragged?) distinct contact at 100'8''.  100' 10'' to 102' is very coarse sand (0.5 to 1 mm); fining upward. Fining upward sequences are 2-3'' thick. No cementation; coarser material is slightly more compact. Silt on edges effervesces.
	R2	
102 to 104'	No data	Intact core. Fining upward sequences 4 to 5'' thick. Sand is 0.25 to about 1 mm in sized and is 50% basalt and 50% felsic. Sand is subangular to angular, slightly moist, very compact and well sorted; no cementation. Silt on edges effervesces.
105 to 107'	No data	Top 3 to 4'' of core is missing. Crude layering; fining upward sequences about 1'' thick. Sand is 0.25 to 1 mm in size; 30% basalt and 70% felsic. Sand is angular to subangular, well sorted, and moist. There is no cementation and no compaction. Silt on edges effervesces.
107 to 109'	(108) Indeterminate	Intact core. Bedding is fining upward sequences; about 1 ½'' thick beds. Sand is 0.25 to 1 mm in size and 30% basaltic and 70% felsic. Sand is angular to subangular, well sorted, and slightly moist. Sediment is very compact but no cementation. Silt on edges effervesces.
112 to 114'	No data	Intact core with 2 zones. From 112' to 113'8'' is medium sand (0.25-0.5 mm) with ¼'' to ½'' bands defined by changes in grain size (0.1-0.25 mm). Finer bands are 40% basalt and 60% felsic, subangular, and compact with no cementation. Silt on edges effervesces  113'.3'' to 113'5'' is fine to medium grained sand (0.25mm) in ½'' thick bands.  113'5'' to 113'8'' is very fine-grained sand (0.1 to 0.25 mm so up to 1 mm) in 6 bands that are about ½'' thick. 70% felsic, 30% basaltic. Contacts are defined by very fine-grained material (maybe clay).  113'8'' to 114' is medium sand as at 112 to 113'3''.
	R2	

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
115 to 117	(116) Indeterminate	Bedded, fining upward sequences on the 4'' scale with internal beds on the ½'' scale. . Sand is coarse (0.25 to 1 mm), slightly moist, 50% basalt and 50% felsic, well sorted and subangular; no pebbles and no cementation. Silt on edge effervesces.
117 to 119	No data	Complete core section. Sediment has crude fining upward bedding. From 117 to 118' is medium sand (0.25 mm) with crude bedding defined by color.  From 118' to 118'5'' is coarser sand (up to 1mm) with brown staining at 118'5''. Sand is angular to subangular.  Back to medium sand (0.25 to 0.5 mm) at 118'5''-119'. Sand is 50% basalt and 50% felsic with a trace of quartzite pebbles (5mm). Sand is well sorted and slightly moist. <u>The center of the section is stained and may be slightly cemented (iron stain).</u> Silt effervesces.
120 to 122'	R2 (121) Reversed 2 (?)	Laminar bedding; fining upward sequences 3 to 4'' thick; coarse base is 2 to 10 mm in size and finer grained (0.5 to 1.5 mm); angular to subangular. Sand is 40% basalt and 60% felsic, not very compacted and slightly moist. Silt effervesces. <u>Clay zone at 120' 2 ½'' is ½'' thick with caliche cement.</u>
122 to 124'	(123.5) Normal (overprint?)	Complete core section. Bedding is defined by color and is about ½'' thick bands fining upward. Coarse part at base is about 1mm in size and the darker fine part is 0.25 to 1mm in size. Sand is subangular, 40% basalt and 60% felsics, well sorted, fairly compacted, and dry. No cement. Silt on edges effervesces.
125 to 127'	No data	Complete core section. Crude ½'' bedding is defined by color. Sand is 0.25-1.0 mm in size, subangular, well sorted, and dry. 60% felsic, 40% basaltic. At 125'3'' is a contact with a coarse (1 to 2 mm) unit above that fines upward. At 126'9'' is clay rich, stained band about ¼'' wide. Sediment is well compacted and not cemented.
127 to 129	No data	Complete core section. Subtle fining upward sequences 6 to 9'' thick. Sand is 0.25 to 0.1 mm in size and contains distinct 1/8'' clay band and other color laminations. 70% felsic, 30% basaltic. Sand is angular to subangular, slightly moist, and compacted with no cementation. Silt effervesces.
130 to 131.5	(130.5) Indeterminate	One fining upward sequence; coarse sand is 0.5 to 2 mm in size and fine sand is 0.1 mm in size. 60% felsic, 40% basaltic. Sand is subangular, well sorted, dry, and not very compact. Silt on edges effervesces.
132 to 134	R2 No data	Complete core section.  132' to 132.6'' is fine-grained sand (0.5-1mm) with a couple ½'' to ¾'' wide beds.  132'6'' to 134' is coarse sand (0.5 to 1.5 with many grains over 2 mm). Sand is 40% basalt and 60% felsic, angular to subangular, well sorted, dry, very compact, and not cemented. Silt effervesces. Section contains rare rounded, basalt pebbles about up to 7 mm in size and oxidized.
135' to 137'	No data	2'' of sluff at the top. Sediment is 98% sand that is laminated, fining upward beds that are about 2'' to 3'' thick. Sand is mostly coarse (up to 2 mm) with some fine sand 0.25-0.5mm in size. Sand contains a few pebbles up to 8 mm in size. Sand is 40% basalt and 60% felsic, subangular, well sorted, and slightly moist; no cementation but well compacted. Silt on edge effervesces.
137' to 139'	(138) Indeterminate	Intact except at the top. Laminated, fining upward sequences 1'' to 2'' thick. Sand is coarse (1.0 mm) to fine (0.25 to 0.5 mm). Sand is angular to subangular, well sorted, slightly moist, and well compacted but no cementation. Slight HCl reaction on sand and medium reaction on silt. Sand is 40% basalt and 60% felsic. No gravel.
140' to 142'	No data	Intact core except at the top. Fining upward lamination with sequences ½''-1'' thick. Coarse sand is 1.0mm in size and fine sand is 0.25 to 0.5mm in size. Sand is subangular, well sorted, and very moist. Core is not well compacted and has no cementation. Sand is 30% basalt and 70% felsic. No gravel. Silt along band reacts strongly to HCl.

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
142' to 144'	(143) Indeterminate	Core contains ¼ to ½" laminations defined by color. Sand is 0.25 to 1 mm in size at the top of the core to 2 mm in size at the bottom of the core. 70% felsic, 30% basaltic. Sand is subangular, well sorted, and slightly moist. Silt effervesces.
145' to 147'	No data	Some lamination and color banding. Sand is 0.25 to 1 mm in size and forms fining upward sequences on a 6 to 9" scale. Sand is well sorted, 40% basalt and 60% felsic, slightly damp, and subangular. Trace of pebbles up to 3mm in size. Silt effervesces
147' to 149'	No data	Intact core. Fining upward sequences about 2" thick. Coarse sand is 1.0 mm in size and fine sand is 0.1 to 0.5 mm in size. Sand is subangular, 40% basalt and 60% felsic, slightly moist, well sorted, and compact but not cemented. HCl reaction is strong on silt; no reaction on sand. Core is 99% sand with minor silt (1%); no gravel.
150' to 151'	No data	Core contains layering defined by color banding. Medium grained sand (0.25to 1 mm), is 40% felsic and 60% basaltic, well sorted, subangular, slightly moist, and poorly compacted. Moderate reaction to HCl.
152' to 154'	(153.5) Indeterminate	Upper 2" of core is sluff. Core is laminated.  152 to 152'6" is fine-grained sand (0.25mm). From 152'-6" to 153'3" is a fining upward sequence with the lower sand about 1 mm in size and the upper sand about 0.25mm in size.  153'3" to 154' is fine sand that is layered in ½" to 1" bands denoted by color. 0.25 to 1 mm with some grains up to 2 mm. Sand is well sorted, 40% basalt and 60% felsic, subangular, and well compacted with no cementation. Silt effervesces. Some basalt pebbles (less than 7mm in size) in coarser sand.
155' to 157'	No data	Upper 5" of core is missing. Loose coarse sand; layered in lower part of core defined by color. 60% felsic, 40% basaltic. Sand is 1 to 2 mm in size with 10 to 15% finer grained (0.25 to 0.5 mm). Sand is moderately sorted, slightly moist, not cemented, and not compacted. Silt effervesces.
157' to 159'	(158) Indeterminate	Intact core. No noticeable structure. Medium (0.1 to 0.5 mm) and coarse sand (1 to 2 mm) is well sorted with minor pebbles up to about 7 mm in size; one 3" x 4" quartzite cobble. Sand is 40% basalt and 60% felsic, fairly compact and slightly moist. Silt effervesces on edge.
160' to 162'	(161) Normal	Upper 3" of core is missing.  160'3" to 160'9" is coarse sand.  160'9" to 162" is a fining upward unit. The upper part is about 1mm in size and is 50% basalt and 50% felsic. The lower part is 0.25 to 1 mm in size, moist, well sorted, compacted, subangular and is 40% basalt and 60% felsic. Silt effervesces on edge.
162 to 164'	Reversed (2?)	Minor, ½" thick banding at 162'7" and 163'1". Medium to fine-grained sand (0.25 to 1 mm ) is 40% basalt and 60% felsic. Sand is subangular, slightly moist, and compacted. Minor rounded, basalt pebbles up to about 10mm in size. Sediment is 99% and with 1% greater than 2mm in size. Silt on edge effervesces.
165' to 167'	No data	24" long core. Medium-grained sand (0.25 to 1 mm), well sorted, angular to subangular, no apparent silt except a little along the liner. Sand is 50% basalt and 50% felsic, moist, with no pebbles.  There is a crude bedding at 165.5' which is a ½" band (bed) the base of which is slightly finer grained. A second band at 166.5' is ½" wide and finer at base.  Coherent core; probably due to moisture. Separated silt effervesces strong. Sand doesn't fizz. 1 to 2 % silt shaken out along edges.
167' to 169'	Indeterminate	Fine layering about every 1" denoted by grain size. Sand is 0.25 to 1 mm in size, well sorted, 40% basalt and 60% felsic, slightly moist, compacted, and contains a few pebbles up to 5mm in size. Silt on edge effervesces.

**Table B.5. (contd.)**

Depth		Polarity	Interval Description
170' to 171'		(171) Normal	Upper 3" of core is missing.  170'3" to 170'4" is fine sand (0.25 to 0.5) with clay; 50% basalt and 50% felsic.  170'4" to 170'7" is a fine sand to silt zone with pieces of dark brown mud. Mud is bioturbated and bleached with calcite cement (paleosols).  170'7" to 171' 8" is laminated coarse sand (0.25 to 1 mm) that is 40% basalt and 60% felsic, slightly moist, compacted, and well sorted. Some calcite in the sand below the paleosols; calcite drops off in amount about 5" below the paleosol. Silt effervesces.
171.8' to 173. 8'	N1	(172.7) Reversed (2)	Upper 2" of core is missing.  171'9" to 172'7" is coarse sand (1mm); no bedding.  At 172'7" sand is finely laminated with fine sand and silt (6 silt layers) totaling ¾" thick. This zone is well cemented/compacted. Remainder of core is fining upward sequence. Coarse sand on the bottom is about 1mm in size; finer sand is 0.25 to 1 mm in size. Crude laminations; possible silt layers, and ¼" sand layer. Sand is 40% basalt and 60% felsic, well sorted, and slightly moist. Core section is 99% sand; no cement.
175' to 177'		No data	Upper 3 ½" of core are missing.  175' to 176' is coarse-grained sand. Sand is 1 to 3 mm in size, 50% basalt and 50% felsic, well sorted, angular to subangular, slightly moist, and not compacted.  176' to 176' 5" is laminated, finer grained sand composing a fining upward sequence.  176' 5" to 177' is a second fining upward unit. The fining upward units are 0.5 to 1 mm sand. The finer parts are laminated; the lower coarser parts are not. Sands are well sorted, slightly moist, and moderately compacted. Both silt and sand react to HCl. Some disseminated calcite.
177' to 179'	N1	Indeterminate	Some lose dry material lost from both ends of the core; top 2" and bottom 3" lost.  At 178'2"-178'3" is a breccia with opal and charcoal with grains up to 8 mm. (Sample taken.) Host sand above is medium-grained (0.25-0.5 mm), 40% basalt and 60% felsic, well sorted, compacted, angular to subangular, and reacts mildly to HCl.  Host sand below is coarser (1 mm) fizz with HCl, compacted.
180' to 181'		No data	Coarse sand, 2 mm to 7 mm in size (10-20% of material is less than 2mm), subrounded, 70% basalt, 30% felsic, poorly sorted, slightly moist, poor consolidation, slight reaction with HCl. No cementation.
182' to 184'		(183) Normal	Missing upper 2" and lower 1" of core. 40% basaltic, 60% felsic. There is a series of color banding due to varying amounts of basalt. Possible upward fining, sequences 5" to 6" thick. Sand is 0.1 to 0.75 mm (some up to 1.5 mm) in size, well sorted, subangular, and slightly moist. No cementation but compaction. Moderate reaction with HCl.
185' to 187'		No data	Coarse sand with no internal structure. Some larger grains up to 6 or 7 mm. Sand is 1 to 2mm in size, 50% felsic and 50% basalt, angular to subangular, slightly moist, and moderately sorted, with moderate compaction. Moderate reaction with HCl.  Somewhat finer grained at top.
187' to 189'	N1	Indeterminate	Crude structure consisting of banding and upward fining sequences. Sand is 1.0 mm to 0.25 mm in sequence of upward fining (very poorly developed) moderately coarse. Grain size is 1.0 mm average for core as a whole. Sand is 50% basalt and 50% felsic, subangular, moderately compacted, slightly moist. No pebbles. Moderate reaction to HCl.

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
190' to 192'	Indeterminate	190' to 190'9" is coarse-grained sand (1 to 2 mm) with some grains up to 5 mm.  190'9"-192' is finer-grain and consists of 1 to 2' thick upward fining sequences. Sand is 0.5 to 2 mm in size at the base and 0.5 mm in the upper part. 50% basalt, 50% mafic. Light color due to felsic content. Sand is moderately moist, very compacted, and well sorted. Moderate reaction to HCl.  190' to 190'9" is 70% basalt, 30% felsic.  190'9" to 192' is 50% basalt, 50% felsic.
192' to 194'	Indeterminate	Three upward fining sequences 6 to 9" thick. Sand is 1 to 1 mm in size, 50% basalt and 50% felsic, poorly sorted, slightly moist, and compact. No cementation. Moderate reaction to HCl.
195' to 197'	No data	One upward fining cycle. Sand at the bottom is up to 3mm in size whereas that at the top is 0.5 mm in size. Sand is 50% basalt and 50% felsic, well sorted, slightly moist, and compact in finer-grained parts. No cementation. Moderate reaction to HCl.
197' to 199'	Indeterminate	No apparent structure. Sand is coarse-grained with some (about 1%) larger granules up to 7mm. Composition is 40% basalt and 60% felsic. Sand is slightly moist, poorly sorted, and poorly compacted. Reacts moderately with HCl.
200' to 201'	(201) Indeterminate	Core sampled for hydrologic properties.  200 to 200'9" is a coarse unit (7 to 6 mm) and fines upward (0.5 to 1 mm). 50% basalt, 50% felsic.  Sediment below 200'9" is finer grained than at 200' to 200' 9" and forms another upward fining unit. This unit is coarser grained than units at shallower depths. Sand is module well sorted, slightly moist, poorly compacted, and consists of 70% basalt and 30% felsic. Moderate reaction to HCl
202' to 204'	No data	Faint color laminations. Coarse sand (1-2 mm) with 1 to 2% pebbles up to 10 mm in size. Sand is 50% basalt and 50% felsic. Pebbles and sand are subangular, slightly moist, moderately sorted, and slightly compacted. Silt on edge effervesces and sand shows a moderate reaction with HCl.
205' to 207'	(205.5) Normal (1?)	No structure except finer grained band at 205' 6" that is ½" thick and contains more silt. Sand is medium grained (0.5 to 1 mm), 50% basalt and 50% felsic, subangular, slightly moist, compact, and well sorted. A few (less than 1%) subround basalt pebbles up to 10 mm in size. No cementation. Reaction with HCl is moderate.
207' to 209'	Indeterminate	Core shows color banding due to changes in the amount of basalt grains. Lighter layers are 50% basalt and 50% felsic; darker layers are 70% basalt and 30% felsic. Sand is 0.5 to 1.0 mm in size, angular to subangular, well sorted, and slightly moist. No cementation but well compacted. Moderate reaction to HCl.
212' to 214'	Normal (1?)	Top 2" and bottom 3" of core are missing. Color banding due to changes in percent of basalt and grain size. The overall sediment is well sorted and well compacted, slightly moist, and shows moderate reaction to HCl.  212'-212'3 ½" is light colored, 0.5 to 1 mm in size, subangular, and is 50% basalt and 50% felsic. A few larger pebbles up to 7-8 mm in size.  212'3 ½" - 212'8" is coarse sand 1 mm to 3 mm in size with grains reaching up to 7 mm. Sand is 60-70 % basalt and 30-40 % felsic.  212'8"- 214' is 0.25 to 1 mm sand that is 50% basalt and 50% felsic.

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
217 to 219'	N1 No data	Material has been lost from both ends of core (lost 2" from top and 3 1/2" from bottom).  Color bedding based on basalt content. Lighter layers are 40% basalt and 60% felsic; darker layers are 60 to 70 % basalt and 30 to 40% felsic. Sand is coarse grained (0.25 to 1 mm). Basalt rich layers are coarser with grains up to 3 to 5 mm and some as large as 10mm. Sand is well sorted, slightly moist, and moderately compacted. Pebbles near bottom of core are up to 2 to 3 cm in size. Slight to moderate reaction to HCl.
220' to 222'	Indeterminate	220'- 220'9 1/2" is disturbed.  220'9 1/2" - 221'4" is medium grained sand (0.5 to 1 mm) with small, crude color bedding and 2 to 3 % scattered basalt pebbles up to 10mm in size. Sand is compacted, slightly moist, well sorted, and consists of 50% basalt and 50% felsic. Reaction to HCl is moderate.  221'4"-222' is coarse grained sand (0.5 to 1 mm) that is 60% basalt and 40% felsic, compacted, and slightly moist. One quartzite pebble at 4 cm in diameter. Slight reaction to HCl.
222' to 224'	(223.5) Normal (1?)	222'-222'2" is missing.  222'2"-222'4" is fine-bedded sand (0.5 to 1 mm) that is 50% basalt and 50% felsic. 222'4"- 222'8 1/2" is darker and coarser sand consisting of 60 to 70% basalt. Grain size is 1 to 2 mm with pebbles up to 10 mm in diameter. There is a crude color bedding.  222'8 1/2"- 223'3" is coarse-grained sand (0.5 to 2 mm) with a few pebbles up to 3 mm in size. Sand is 60 to 70% basalt and has a crude color bedding.  223'3" -223'5 1/2" is finer grained sand (0.5 mm to 1 mm), light color, and 50% basalt and 50% felsic in composition.  223'5 1/2" -224' is coarser-grained sand (1 to 2 mm) with a few pebbles up to 3 to 4 cm in diameter. Composition is 60% basalt and 40% felsic.  All the above are slightly moist, well sorted, and compact with no cementation, Reaction to HCl is moderate to strong
225' to 227'	(226) Normal (1?)	Core shows a color zonation. 225'-225'2" is missing.  225'2"-225'5" is light color sand (1mm) that is 50% basalt and 50% felsic.  225'5"-225'7" is like the above sand but includes larger pebbles about 2 cm in diameter.  225'7"-225'9" is sand that is 1 to 2 mm in size and 60-70% basalt and 30-40% felsic in composition.  225'9"-226'8" is light color sand that is 50% basalt and 50% felsic with a layer of pebbles at 225'10"  226'8"-227' is coarser grained granules (3 to 5 mm) and is 60% to 70% basalt.  All of the above are very compacted, well sorted moderately moist. Reaction to HCl is moderate to strong.

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
227' to 229'	?	No data  Upper 1" of core is missing.  227'- 228'1" is very coarse grained (0.5 to 7 mm and greater in size) with pebbles up to 4 cm. Unit is 60 to 70 % basalt and 30 to 40% felsic, well compacted, slight moist, and poorly sorted.  228'1"-229' is coarse sand and granules (1-3 mm) that are 60 to 70% basalt and 30 to 40% felsic. Sand is 20-30% of the sample. The sediment is moderately sorted and slightly moist. Fines show strong reaction with HCl.
229' to 232'		No data Not logged - archive
232' to 234'	R1	(233) Reversed 1 No apparent internal structure. Entire core is coarse grained (0.5 to 2 mm), poorly sorted, subangular, moderately compacted, and 50 % basalt and 50% felsic. 50% of the sediment is 1 to 2 mm in size and 50% is greater than 2 mm in size. Sand is subangular and pebbles are rounded. Some basalt pebbles up to 3 cm. Moderate reaction to HCl.
234' to 241'		No data Not logged - archive
241' to 243'		(242) Reversed 1 Coarse sand (0.5 to 2 mm). Sand is 50% basalt and 50% felsic, subangular, slightly moist, well compacted, and well sorted. Slight reaction with the HCl.
243' to 255'		No data Not logged - archive
255' to 256'		(255) Reversed 1 255'-255'2" is banded, fine-grained sand (0.1-0.5) with 20% silt.  255'2"-256' is sand (0.25-0.5mm) that is 50% basalt and 50% felsic, slightly moist, and well sorted. No compaction or cementation. Moderate reaction with the HCl.
256' to 259.5'	R1	No data Not logged - archive
259.5' to 261.5'		(261) Reversed Upper 6" of core is sluff.  At 260'4" is a 1" thick, basalt rich zone. This entire cored interval is medium sand (0.25 to 1 mm) that is well sorted, subangular to subrounded, and slightly moist. Sand is compacted but not cemented. No pebbles. Moderate reaction with HCl.
261.5' to 265'		No data Not logged - archive
265' to 266.5'	R1	(265.5) Indeterminate Bedding – 1 bed at 265'6"-265'8" and another at, 266'2"-266'4". Except for the two beds, overall grain size is 0.25 to 0.5 mm with a few grains up to 1 mm. Sand is angular to subangular, well sorted, slightly moist, and not very compacted. No cementation. Strong reaction with HCl.  265'8"-265'6" is compact and slightly cemented with CaCO <sub>3</sub> (strong reaction with HCl). Grain sizes are as described above.  266'2"- 266'4" The layer is also cemented with CaCO <sub>3</sub> (reacts with HCl). Base of 266'5" has rounded, basalt pebbles with some sand grains cemented on them. Pebbles are up to 4 cm in size.

**Table B.5. (contd.)**

Depth	Polarity	Interval Description
266.5' to 268.5'	(267) Indeterminate (268) Indeterminate	266.5' - 266'10" is medium sand (0.25 to 1 mm) and gravel up to 4" in diameter. 40-50% gravel. Sand moderate reacts with HCl. 60% felsic, 40% basalt.  266'10" - 268'3" is a sand and gravel sequence.  266'10" - 266'11" is caliche-cemented sand. Sand is 50% basalt and 50% felsic; gravel is 30% basalt and 70% felsic. Gravel ranges in size from 10 mm to 5 cm. Sand has a strong reaction with HCl and contains some 2 mm pieces of CaCO <sub>3</sub> .  Bottom 268'5" - 268'7" is sand.
270' to 272'	No data	270' - 270'6" is basalt gravel, up to 4" in diameter with some smaller, felsic gravel.  270'6" - 271'10" is gravelly sand, 60 to 70 % sand, 30 to 40% gravel. Sand is (0.1 to 1 mm), angular to subangular, and contains caliche stringers. Gravel is rounded, poorly sorted, slightly moist, and consists of 60% basalt and 40% metamorphic rock fragments. Gravel is slightly cemented with calcite.